


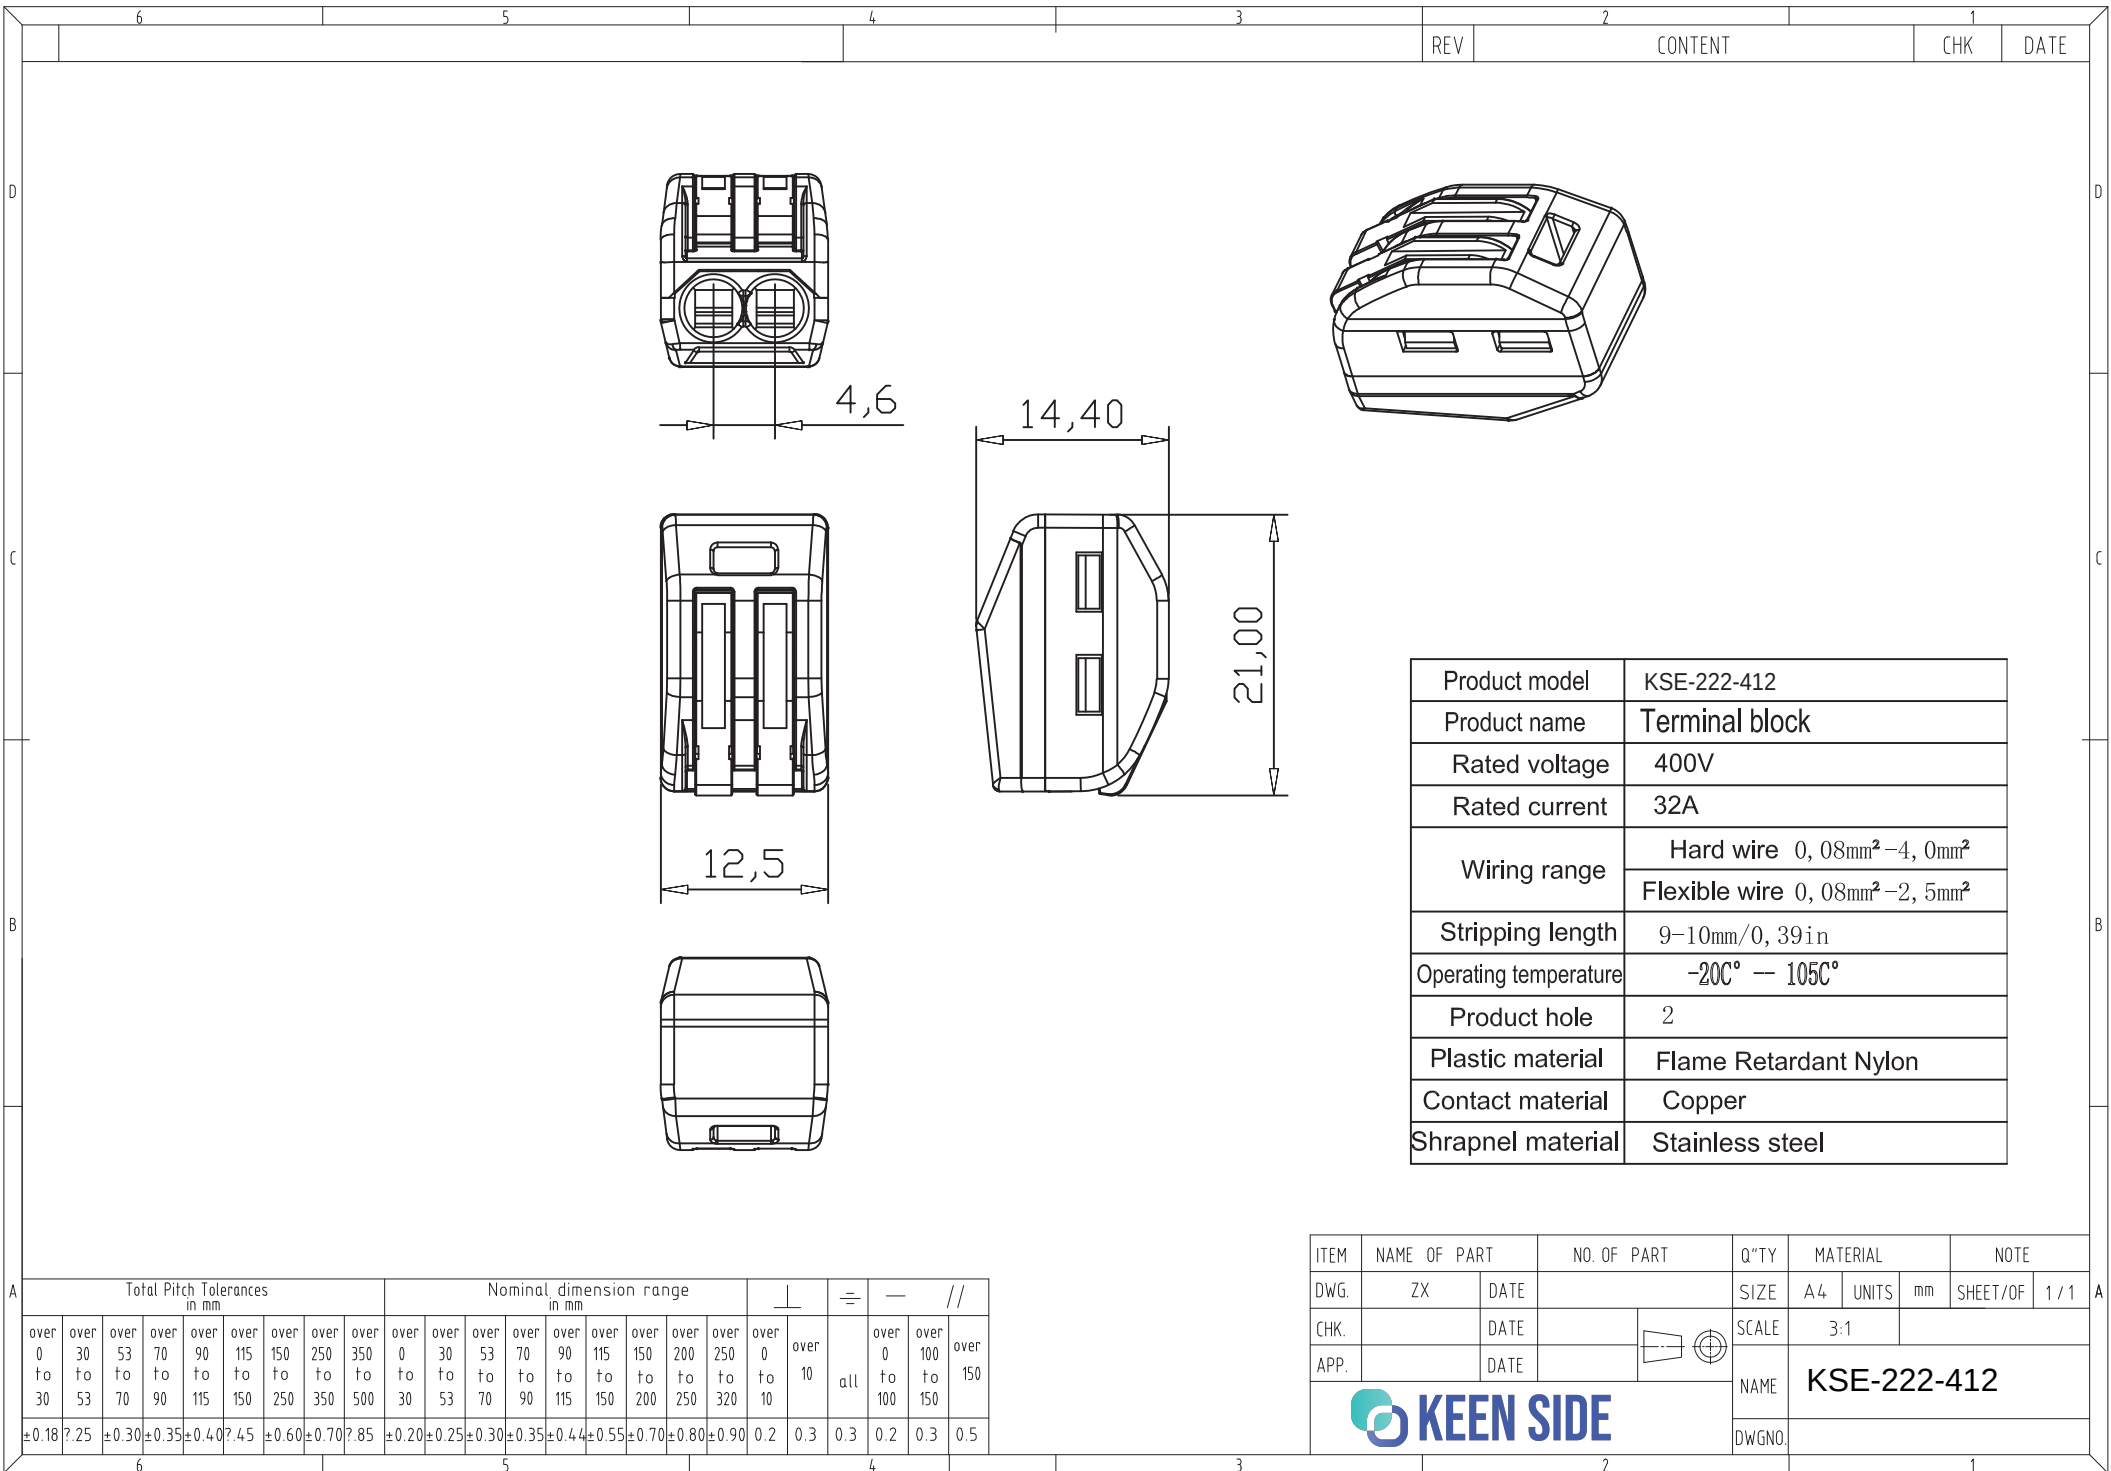

Product model	KSE-222-412
Product name	Terminal block
Rated voltage	400V
Rated current	32A
Wiring range	Hard wire 0,08mm ² -4,0mm ²
	Flexible wire 0,08mm ² -2,5mm ²
Stripping length	9-10mm/0,39in
Operating temperature	-20C° -- 105C°
Product hole	2
Plastic material	Flame Retardant Nylon
Contact material	Copper
Shrapnel material	Stainless steel

ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL			NOTE	
DWG.	ZX	DATE		SIZE	A4	UNITS	mm	SHEET/OF	1 / 1
CHK.		DATE		SCALE	3:1				
APP.		DATE			NAME		KSE-222-412		
					DWGNO.				

Total Pitch Tolerances in mm										Nominal dimension range in mm										⊥	≡	—	//
over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 250	over 250 to 350	over 350 to 500	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 0 to 10	over 10	all	over 0 to 100	over 100 to 150	over 150
±0.18	±0.25	±0.30	±0.35	±0.40	±0.45	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5

<

