


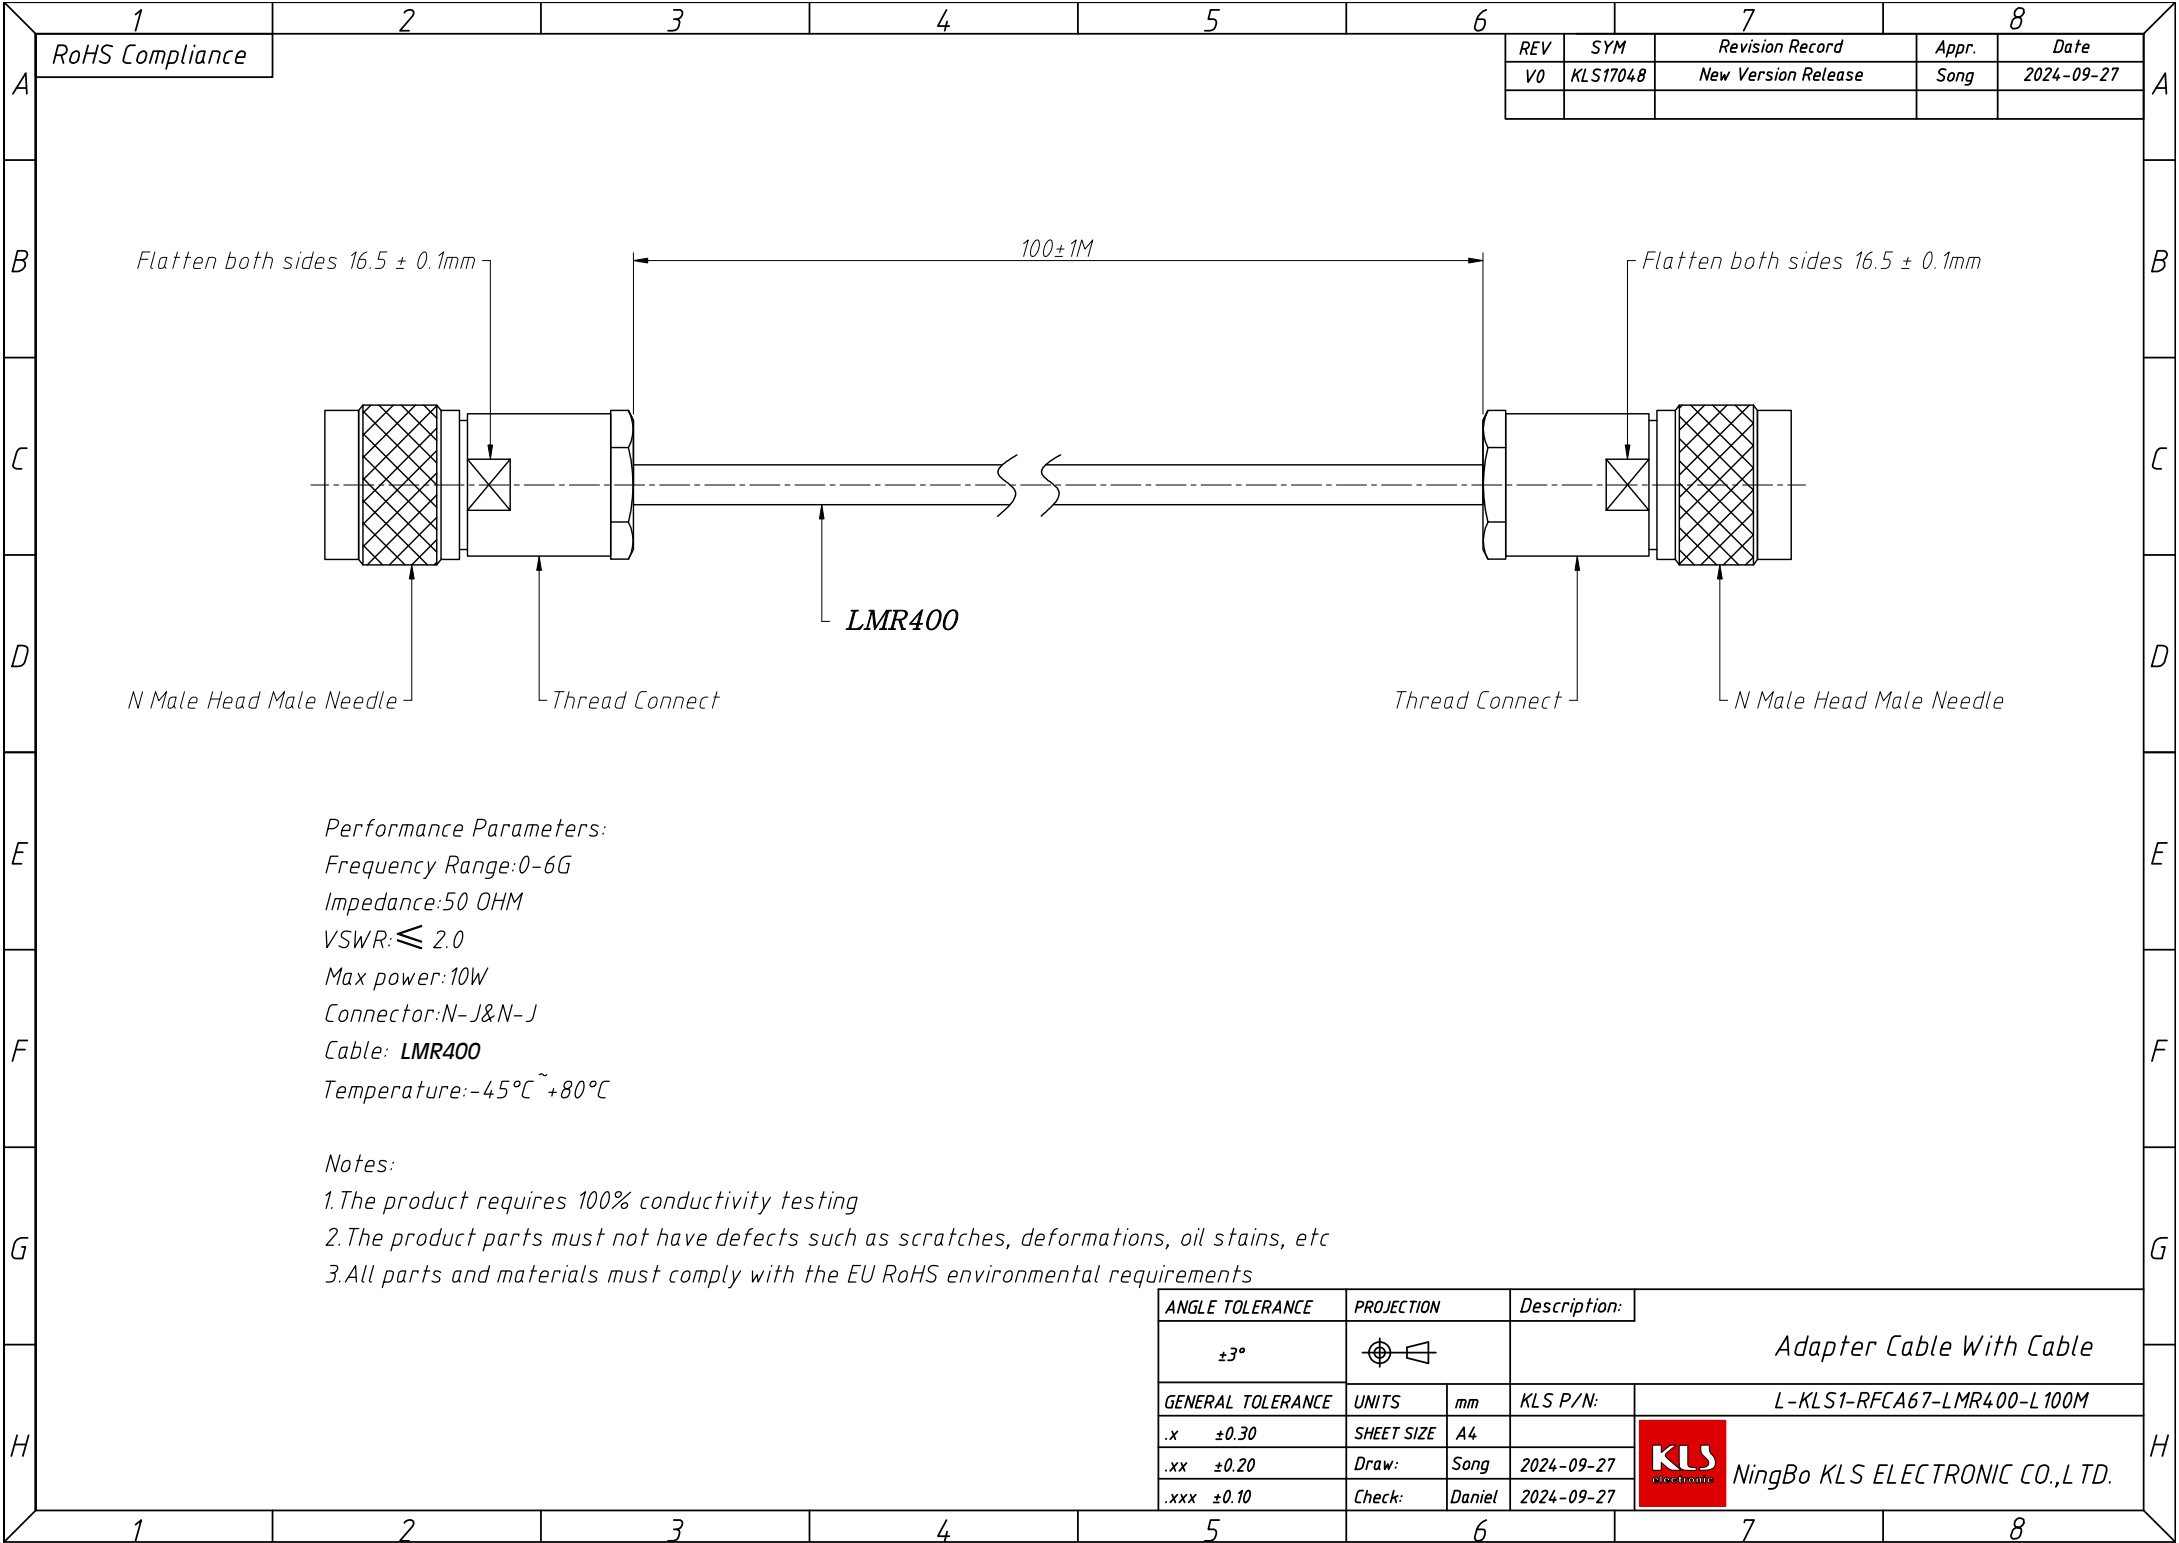

1
RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS17048	New Version Release	Song	2024-09-27

Flatten both sides $16.5 \pm 0.1\text{mm}$

$100 \pm 1\text{M}$

Flatten both sides $16.5 \pm 0.1\text{mm}$

LMR400

N Male Head Male Needle

Thread Connect

Thread Connect

N Male Head Male Needle

Performance Parameters:

Frequency Range:0-6G

Impedance:50 OHM

VSWR: ≤ 2.0

Max power:10W

Connector:N-J&N-J

Cable: LMR400

Temperature:-45°C ~ +80°C

Notes:

- 1.The product requires 100% conductivity testing
- 2.The product parts must not have defects such as scratches, deformations, oil stains, etc
- 3.All parts and materials must comply with the EU RoHS environmental requirements

ANGLE TOLERANCE		PROJECTION		Description:	
$\pm 3^\circ$				Adapter Cable With Cable	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS1-RFCA67-LMR400-L100M
.x	± 0.30	SHEET SIZE	A4		
.xx	± 0.20	Draw:	Song	2024-09-27	NingBo KLS ELECTRONIC CO.,L TD.
.xxx	± 0.10	Check:	Daniel	2024-09-27	