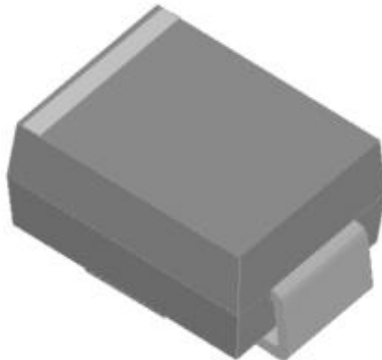


US1A THRU US1M

Surface Mount High Efficient Rectifier


● Essential information; basic information

Features ● Low profile package ● Ideal for automated placement ● Glass passivated chip junction Typical Applications For use in general purpose rectification of power supplies, inverters, converters, and freewheeling diodes for consumer, and telecommunication.	 
Mechanical Data ● Package: DO-214AC (SMA) Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant ● Terminals: Tin plated leads, solderable per J-STD-002 and JESD22-B102 ● Polarity: Cathode line denotes the cathode end	

● Maximum Ratings (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	US1A	US1B	US1D	US1G	US1J	US1K	US1M
			HS1A	HS1B	HS1D	HS1G	HS1J	HS1K	HS1M
Maximum Repetitive peak reverse voltage	VRRM	V	50	100	200	400	600	800	1000
Maximum RMS Voltage	VRMS	V	35	70	140	280	420	560	700
Maximum DC Blocking Voltage	VDC	V	50	100	200	400	600	800	1000
Average rectified output current @60Hz sine wave, resistance load, TL (Fig.1)	IO	A	1.0						
Forward Surge Current (Non-repetitive) @60Hz Half-sine wave,1 cycle,	IFSM (Tj=25℃)	A	25						
Storage temperature	Tstg	℃	-55 ~ +150						
Junction temperature	Tj	℃	-55 ~ +150						
Maximum instantaneous forward voltage drop per diode	VF (IFM=1.0A)	V	1.0			1.3		1.7	
Maximum reverse recovery time	Trr:IF=0.5A,IR=1.0A,Irr=0.25A	ns	50				75		
Maximum DC reverse current at rated DC blocking voltage per diode	IR (Tj =25℃)	μ A	5						
	IR (Tj =125℃)		100						


Characteristics (Typical)

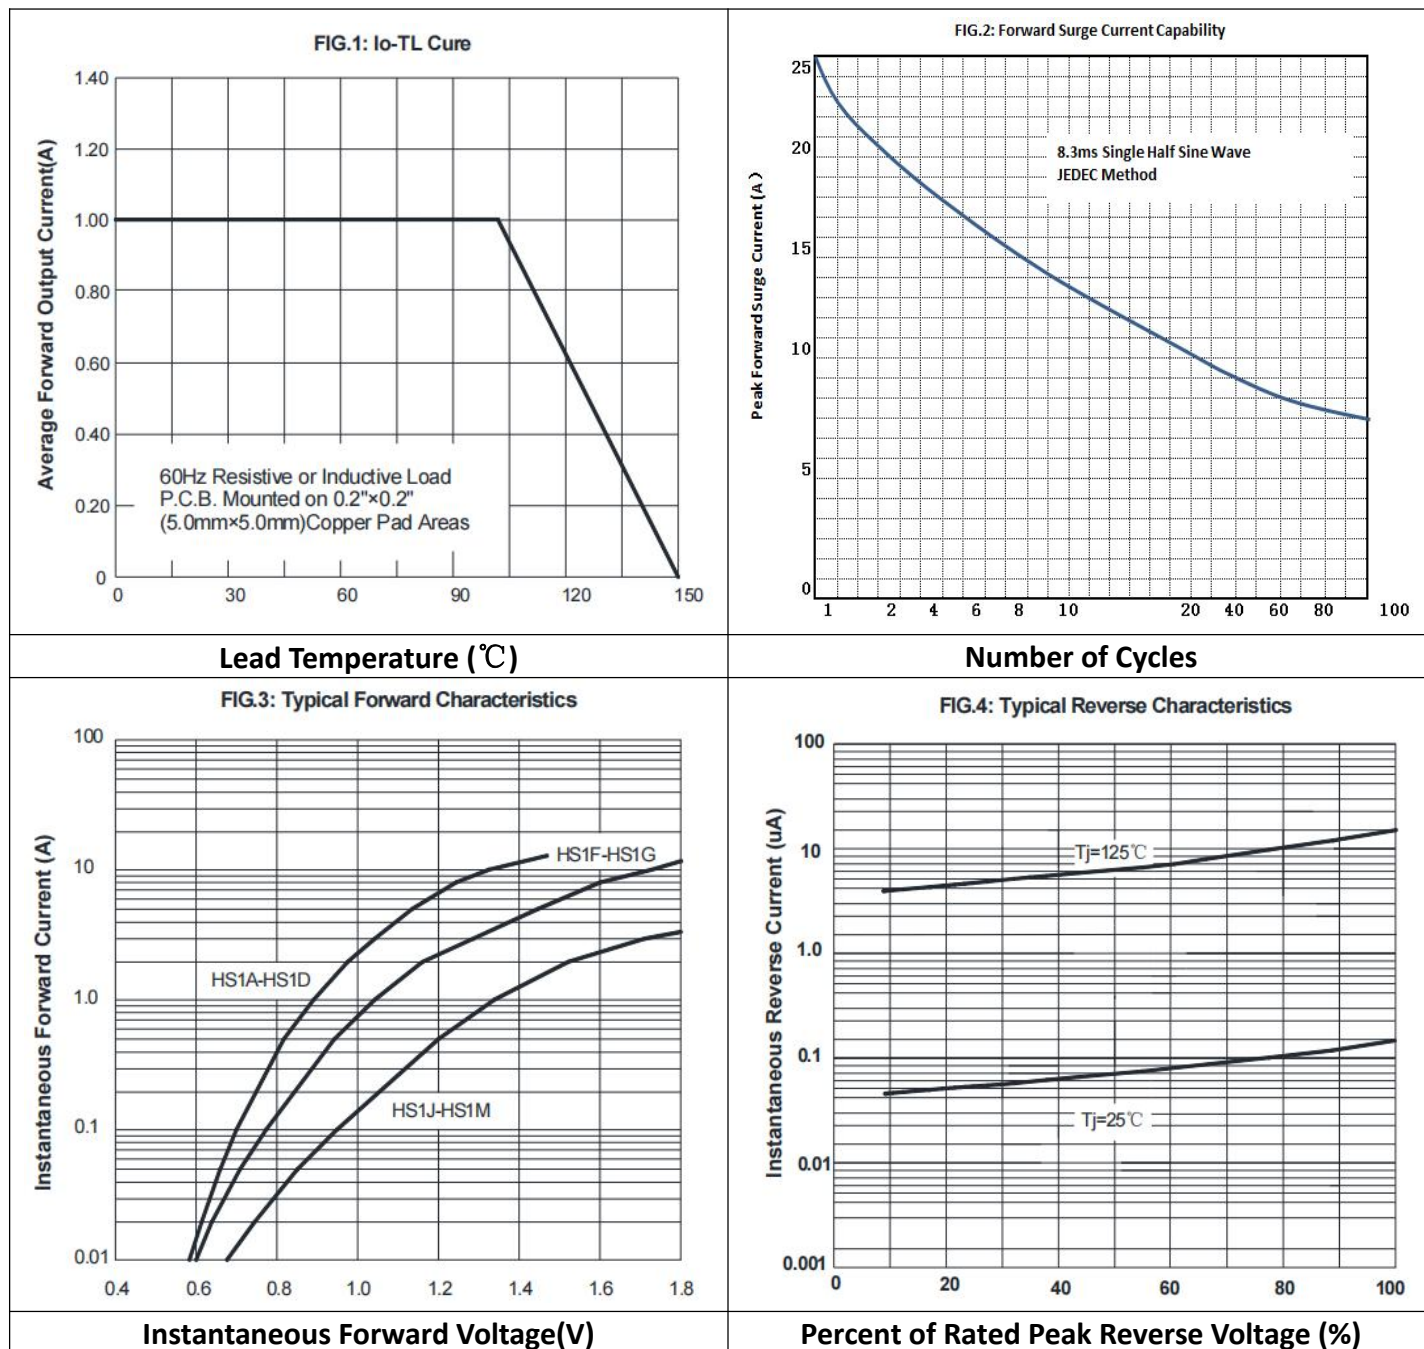

Ordering Information (Example)

type specification	manner of packin	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
US1A-US1M (SMA)	T/B	2000	10000	100000	7" reel
	T/B	5000	10000	100000	11" reel
	T/B	5000	10000	100000	13" reel

● Outline Dimensions

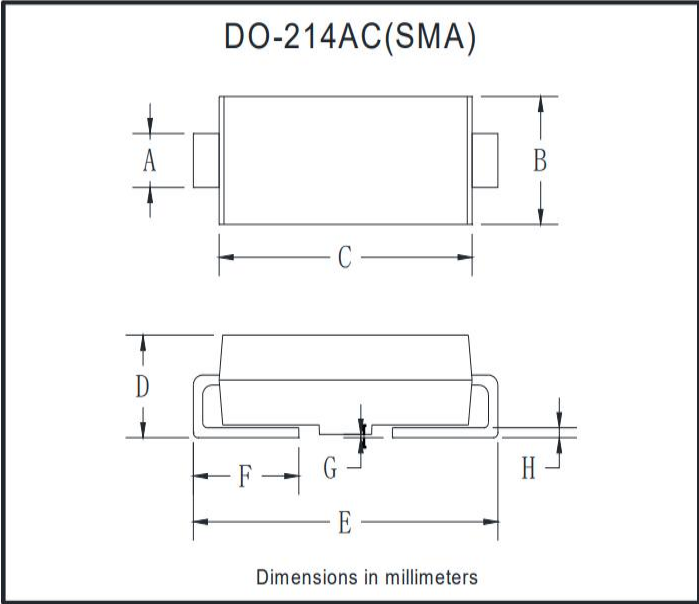

DO-214AC(SMA)		
Dim	Min	Max
A	1.25	1.58
B	2.40	2.83
C	4.06	4.75
D	1.90	2.30
E	4.93	5.28
F	0.76	1.41
G	0.08	0.20
H	0.15	0.31