

- 85 - 305VAC or 100 - 430VDC input voltage
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range: -30°C to +70°C
- Up to 88% efficiency
- No-load power consumption < 0.5W
- High I/O isolation test voltage up to 4000VAC
- Output short circuit, over-current, over-voltage protection
- Over-voltage class III (designed to meet EN61558)
- Operating altitude up to 5000m

ASMT25-23XX



RoHS



3-Year Warranty

Description

ASMT25-23XX series features universal AC input and at the same time accepts DC input voltage, cost-effective, low no load power consumption, high efficiency and high reliability. These converters offer excellent EMC performance and meet IEC/EN61000-4, CISPR32/EN55032, IEC/UL/EN62368, GB4943 standards and they are widely used in areas of industrial, LED, street light control, electricity, security, telecommunications, smart home etc.

Selection Guide

Certification	Part No.	Output Power (W)	Nominal Output Voltage and Current (Vo/Io)	Output Voltage Adjustable Range (V)	Efficiency at 230VAC (%) Typ.	Max. Capacitive Load (μF)
/	ASMT25-2303	19.8	3.3V/6A	2.85-3.6	78	5000
	ASMT25-2305	25	5V/5A	4.5-5.5	81	4000
	ASMT25-2312	25.2	12V/2.1A	10.8-13.2	85	3000
	ASMT25-2315	25.5	15V/1.7A	13.5-16.5	86	2000
	ASMT25-2324	26.4	24V/1.1A	22-27.6	87	1000
	ASMT25-2348	27.36	48V/0.57A	42-54	88	500
Note: *Use suffix "C" for terminal with protective cover and suffix "Q" for conformal coating.						

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit	
Input Voltage Range	AC input		85	--	305	VAC	
	DC input		100	--	430	VDC	
Input Voltage Frequency			47	--	63	Hz	
Input Current	115VAC		--	--	0.6	A	
	230VAC		--	--	0.34		
Inrush Current	115VAC	Cold start	--	20	--		
	230VAC		--	40	--		
Leakage Current	277VAC		<0.5mA				
Hot Plug			Unavailable				

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy	Full load range	3.3V	--	±3	--	%
		5V	--	±2	--	
		12V/15V/24V/48V	--	±1	--	
Line Regulation	Rated load	3.3V/5V	--	±0.5	±1	
		12V/15V/24V/48V	--	±0.5	--	
Load Regulation	0% - 100% load	3.3V/5V	--	±1	±2	
		12V/15V/24V/48V	--	±0.5	±1	
Ripple & Noise*	20MHz bandwidth	3.3V/5V/12V/15V/24V	--	--	100	mV
	(peak-to-peak value)	48V	--	--	120	

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Temperature Coefficient			--	±0.03	--	%/°C
Minimum Load			0	--	--	%
Stand-by Power Consumption	230VAC	3.3V/5V/12V/15V/24V	--	--	0.3	W
		48V	--	--	0.5	
Start-up Delay Time			--	300	--	ms
Hold-up Time	115VAC		--	8	--	
	230VAC		--	60	--	
Short Circuit Protection	Recovery time <5s after the short circuit disappear.		Hiccup, continuous, self-recovery			
Over-current Protection			110%-300% Io, self-recovery			
Over-voltage Protection	3.3V		≤6.75VDC (Output voltage hiccup, self-recovery)			
	5V		≤7.75VDC (Output voltage hiccup, self-recovery)			
	12V		≤16.2VDC (Output voltage hiccup, self-recovery)			
	15V		≤20.25VDC (Output voltage hiccup, self-recovery)			
	24V		≤32.4VDC (Output voltage hiccup, self-recovery)			
	48V		≤60VDC (Output voltage hiccup, self-recovery)			

Note: *The “Tip and barrel method” is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information.

General Specifications

Item		Operating Conditions			Min.	Typ.	Max.	Unit
Isolation	Input -	Electric strength test for 1min., leakage current <10mA			2000	--	--	VAC
	Input - output				4000	--	--	
	Output -				1250	--	--	
Insulation Resistance	Input -	At 500VDC			100	--	--	MΩ
	Input - output				100	--	--	
	Output -				100	--	--	
Operating Temperature					-30	--	+70	℃
Storage Temperature					-40	--	+85	
Storage Humidity		Non-condensing			--	--	95	%RH
Operating Humidity					20	--	90	
Switching Frequency					--	65	--	kHz
Power Derating		Operating temperature derating	85VAC-100VAC	-30℃ to -25℃	6.0	--	--	% /℃
			3.3V	+40℃ to +70℃	1.33	--	--	
			Others	+50℃ to +70℃	2.0	--	--	
		Input voltage derating	85VAC-100VAC		1.33	--	--	% /VAC
			277VAC-305VAC		0.72	--	--	
Safety Standard					IEC/UL62368-1, GB4943.1, IS13252 (Part1) safety approved & EN62368-1, BS EN 62368-1 (Report)			
Safety Class					CLASS I			
MTBF		MIL-HDBK-217F@25℃			>450,000 h			



Mechanical Specifications

Case Material	Metal (AL5052, SGCC)
Dimension	80.00 x 55.00 x 25.00 mm
Weight	115g (Typ.)
Cooling Method	Free air convection

Electromagnetic Compatibility (EMC)



Emissions	CE	CISPR32/EN55032 CLASS B	
	RE	CISPR32/EN55032 CLASS B	
Immunity	ESD	IEC/EN 61000-4-2 Contact ±6KV/Air ±8KV	perf. Criteria A
	RS	IEC/EN61000-4-3 10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4 ±2KV	perf. Criteria A
	Surge	IEC/EN61000-4-5 line to line ±1KV/line to ground ±2KV	perf. Criteria A
	CS	IEC/EN61000-4-6 10Vr.m.s	perf. Criteria A
	Voltage dip, short interruption and voltage variation	IEC/EN61000-4-11 0%, 70%	perf. Criteria B

Product Characteristic Curves

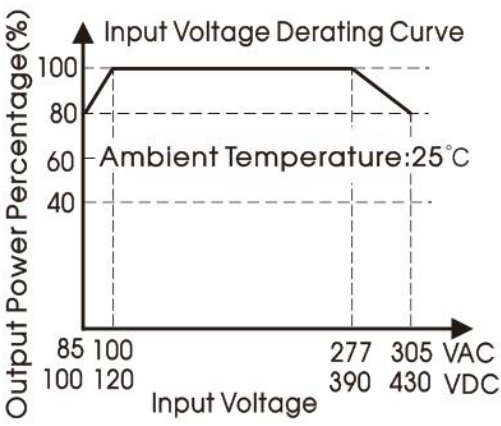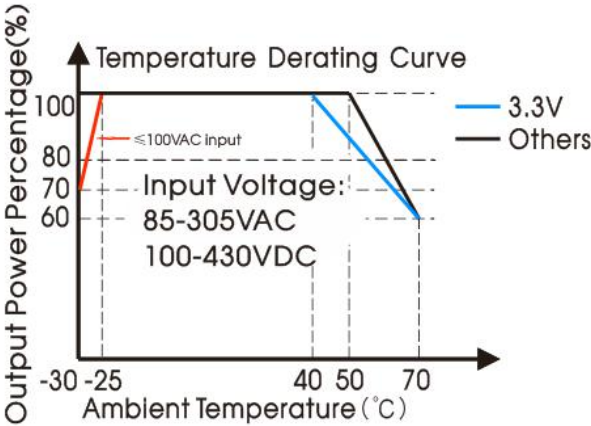

Note: 1. With an AC input between 85-100V/277-305VAC and a DC input between 100-120VDC/390-430VDC, the output power must be derated as per temperature derating curves;



Product Characteristic Curves

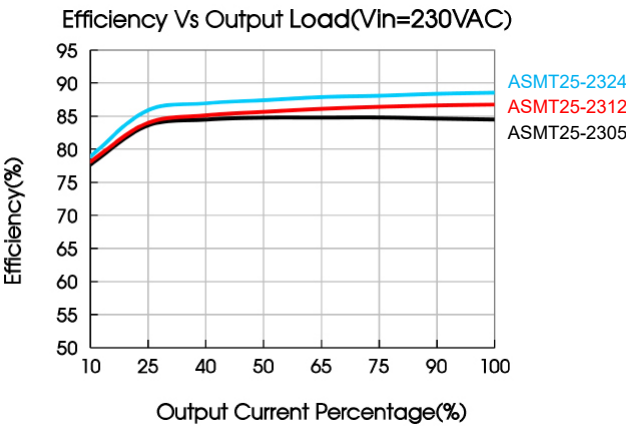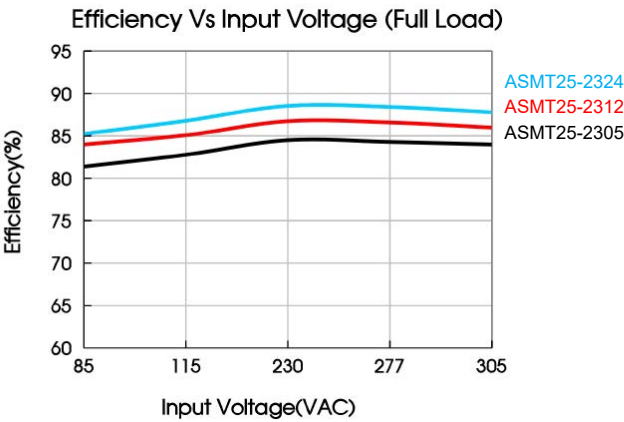

Dimensions and Recommended Layout

PIN OUT	
PIN	Function
1	AC (L)
2	AC (N)
3	
4	-Vo
5	+Vo

Note: At least one position ①~④ must be securely connected to the GND.

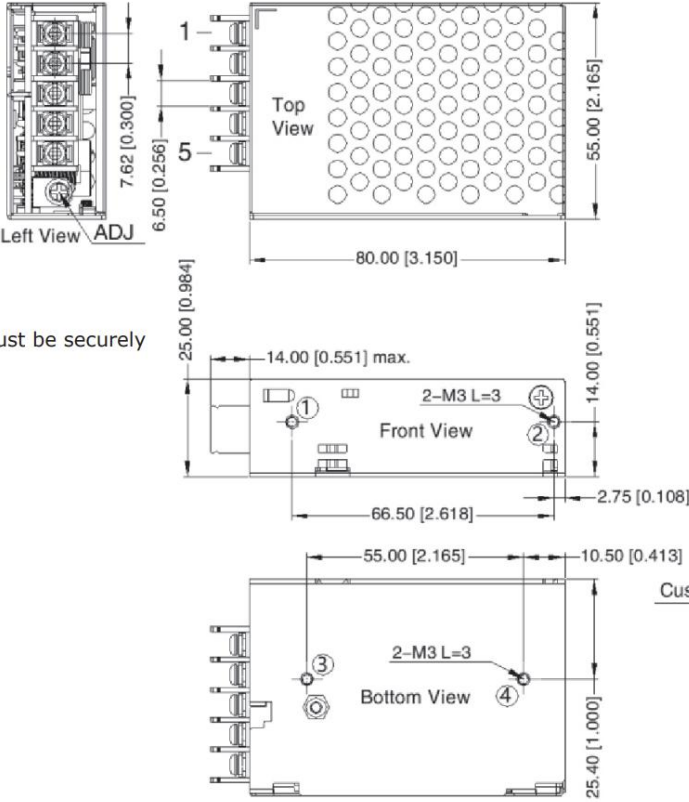

Position	Screw Spec.	L (max)	Torque (max)
① ~ ④	M3	3 mm	0.4 N·m

units: mm [inches]
tolerance: ± 1.00 [± 0.039]
wire range: 22~12 AWG
connector tightening torque: M3, 0.4 N·m

Note:

1. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity $<75\%\text{RH}$ with nominal input voltage and rated output load;
2. The ambient temperature derating of $3.5^{\circ}\text{C}/1000\text{m}$ is needed for operating altitude greater than 2000m;
3. All index testing methods in this datasheet are based on our company corporate standards;
4. In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
5. We can provide product customization service, please contact our technicians directly for specific information;
6. Products are related to laws and regulations: see "Features" and "EMC";
7. The out case needs to be connected to the earth of system when the terminal equipment in operating;
8. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.