

- Universal 85 - 264VAC or 120 - 370VDC input voltage
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range: -30°C to +70°C
- Low standby power consumption, high efficiency
- High I/O isolation test voltage up to 4000VAC
- Low ripple & noise
- Output short circuit, over-current, over-voltage protection
- Over-voltage class III (designed to meet EN61558)
- Operating altitude up to 5000m

ASMT35-20XX



RoHS 3-Year Warranty

Description

ASMT35-20XXseries features universal AC input and at the same time accepts DC input voltage, cost-effective, low no load power consumption, high efficiency and high reliability. These converters offer excellent EMC performance and meet IEC/EN61000-4, CISPR32/ EN55032, IEC/UL/EN62368, IEC/EN60335, GB4943, IEC/EN61558 standards and they are widely used in areas of industrial, LED, street light control, electricity, security, telecommunications, smart home etc.

Selection Guide

Certification	Part No.	Output Power (W)	Nominal Output Voltage and Current (Vo/Io)	Output Voltage Adjustable Range (V)	Efficiency at 230VAC (%) Typ.	Max. Capacitive Load (μF)
/	ASMT35-2005	35	5V/7A	4.5-5.5	86	8000
	ASMT35-2012	36	12V/3A	10.2-13.8	88	1500
	ASMT35-2015		15V/2.4A	13.5-18	89	1000
	ASMT35-2024		24V/1.5A	21.6-28.8	88	750

Note: *Use suffix "C" for terminal with protective cover and suffix "Q" for conformal coating.

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Voltage Range	AC input		85	--	264	VAC
	DC input		120	--	370	VDC
Input Voltage Frequency			47	--	63	Hz
Input Current	115VAC		--	--	0.8	A
	230VAC		--	--	0.6	
Inrush Current	115VAC	Cold start	--	30	--	
	230VAC		--	50	--	
leakage current	240VAC		<0.75mA			
Hot Plug			Unavailable			

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy	Full load range	5V	--	±2	--	%
		12V/15V/24V	--	±1	--	
Line Regulation	Rated load		--	±0.5	--	
Load Regulation	0% - 100% load	5V	--	±1	--	
		12V/15V/24V	--	±0.5	--	
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	5V	--	80	--	mV
		12V/15V	--	120	--	
		24V	--	150	--	
Temperature Coefficient			--	±0.03	--	%/℃

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Minimum Load		0	--	--	%
Stand-by Power Consumption		--	--	0.3	W
Hold-up Time	115VAC	8	--	--	ms
	230VAC	30	--	--	
Short Circuit Protection	Recovery time <5s after the short circuit disappear	Hiccup, continuous, self-recovery			
Over-current Protection		110%-200% Io, self-recovery			
Over-voltage Protection	5V	≤6.3VDC (Hiccup, self-recovery)			
	12V	≤16.2VDC (Hiccup, self-recovery)			
	15V	≤21.75VDC (Hiccup, self-recovery)			
	24V	≤33.6VDC (Hiccup, self-recovery)			
Note: *The “Tip and barrel method” is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information.					

General Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Isolation	Input -	Electric strength test for 1min., leakage current <10mA	2000	--	--	VAC
	Input - output		4000	--	--	
	Output -		1250	--	--	
Insulation Resistance	Input -	At 500VDC	100	--	--	MΩ
	Input - output		100	--	--	
	Output -		100	--	--	
Operating Temperature			-30	--	+70	℃

General Specifications

Item		Operating Conditions		Min.	Typ.	Max.	Unit
Storage Temperature	Non-condensing			-40	--	+85	°C
Storage Humidity				--	--	95	%RH
Operating Humidity				20	--	90	
Switching Frequency				--	65	--	kHz
Power Derating	Operating temperature derating	-30°C to -25°C	85VAC-100VAC	5	--	--	% / °C
		+50°C to +70°C		2	--	--	
	Input voltage derating		85VAC - 100VAC	1.33	--	--	% / VAC
Safety Standard				IEC/UL62368-1, GB4943.1, IS13252 (Part1) safety approved & EN62368-1, EN60335-1, EN61558-1, BS EN 62368-1 (Report) Design refer to IEC60335-1, IEC61558-1			
Safety Class				CLASS I			
MTBF	MIL-HDBK-217F@25°C			> 300,000 h			

Mechanical Specifications

Case Material	Metal (AL1100, SGCC)
Dimension	99.00 x 82.00 x 30.00 mm
Weight	170g (Typ.)
Cooling Method	Free air convection


Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032 CLASS B	
	RE	CISPR32/EN55032 CLASS B	
	Harmonic current	IEC/EN61000-3-2 CLASS A	
Immunity	ESD	IEC/EN 61000-4-2 Contact ±6KV/Air ±8KV	perf. Criteria A
	RS	IEC/EN 61000-4-3 10V/m	perf. Criteria A
	EFT	IEC/EN 61000-4-4 ±2KV	perf. Criteria A

Electromagnetic Compatibility (EMC)

Immunity	Surge	IEC/EN 61000-4-5 line to line ±2KV/line to ground ±4KV	perf. Criteria A
	CS	IEC/EN61000-4-6 10 Vr.m.s	perf. Criteria A
	Voltage dip, short interruption and voltage variation	IEC/EN61000-4-11 0%, 70%	perf. Criteria B

Product Characteristic Curves


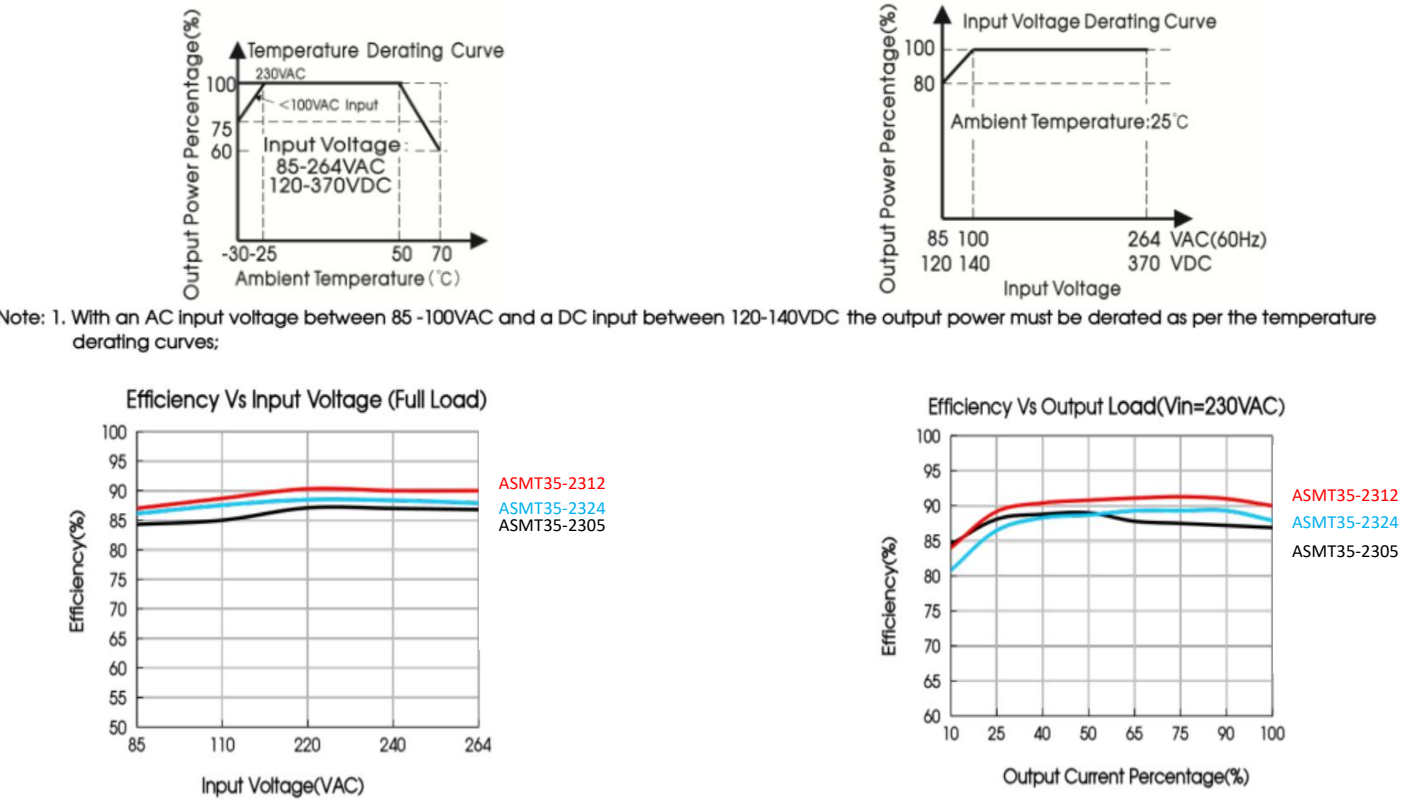


Dimensions and Recommended Layout

units: mm
tolerance: ±1 [±0.039]


PIN CONNECTIONS	
PIN	Function
1	AC(L)
2	AC(N)
3	⊕
4	-Vo
5	+Vo

wire range: 22-12 AWG
connector tightening torque: M3.5, 0.8 N·m

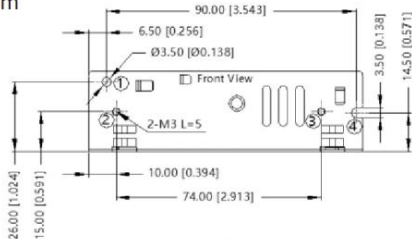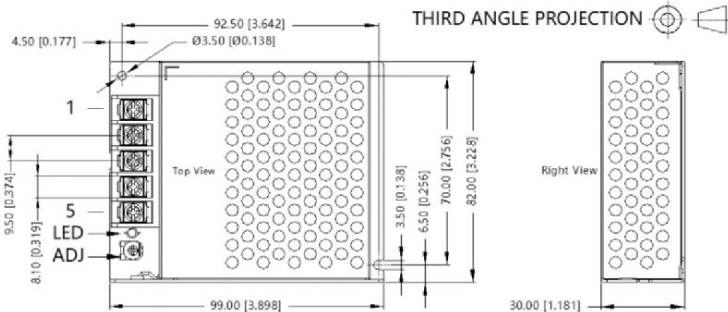

Position	Screw spec.	L (max)	Torque (max)
② - ③	M3	5 mm	0.4 N·m
⑥ - ⑦	M3	3 mm	0.4 N·m

Note: At least one hole position, ①~⑧ must be securely connected to Protective Earth (PE)Ⓐ



- Note:
- 1. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75% RH with nominal input voltage and rated output load;
 - 2. The room temperature derating of 5°C/1000m is needed for operating altitude greater than 2000m;
 - 3. All index testing methods in this datasheet are based on our company corporate standards;
 - 4. In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
 - 5. We can provide product customization service, please contact our technicians directly for specific information;
 - 6. Products are related to laws and regulations: see "Features" and "EMC";
 - 7. The out case needs to be connected to PE () of system when the terminal equipment in operating;