
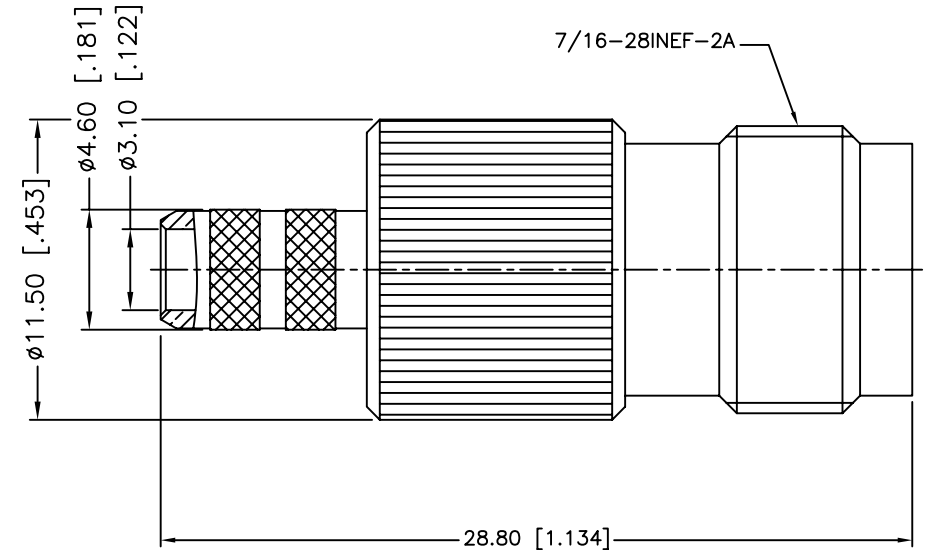
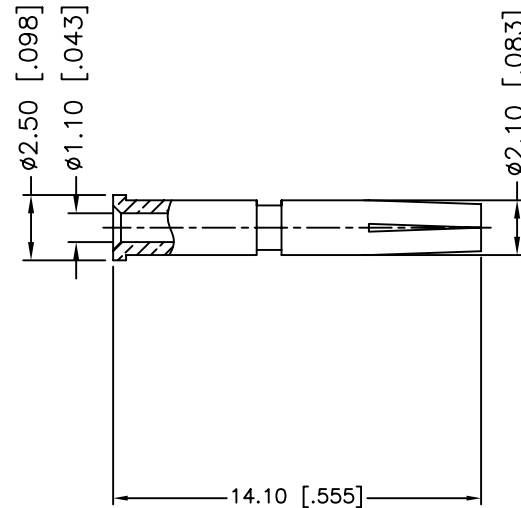


RECOMMENDED
CABLE STRIPPING DIM'S

REV.	DATE	ECR NO.	DESCRIPTION
NC	09/01/98	XXXXXX	INITIAL RELEASE
A	05/01/04	XXXXXX	UPDATE DRAWING FORMAT
B	08/09/10	XXXXXX	ADD RG58/U CABLE TO THE PART DESCRIPTION
C	07/12/11	2130	TITLE WAS CHANGED

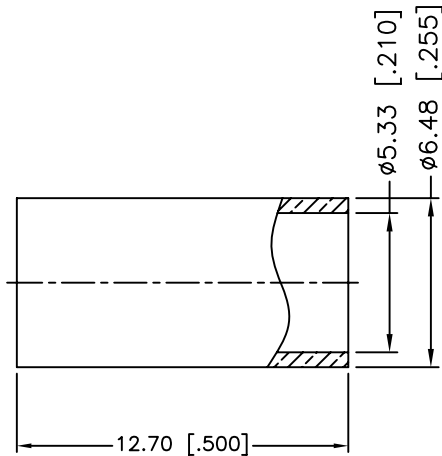

1. CRIMPED FERRULE
HEX CRIMP SIZE .216"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

5	FERRULE	COPPER	NICKEL	1
4	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
3	INSULATOR	PTFE	NATURAL	1
2	BODY	BRASS	NICKEL	1
1	HOUSING	BRASS	NICKEL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE
IN MILLIMETERS. DIMENSIONS IN [] ARE IN
INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm $\pm$ 0.20mm
8 - 30mm $\pm$ 0.40mm
30 - 120mm $\pm$ 0.50mm

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR INCHES ARE:
.020 - .315 $\pm$ 0.007"
.315 - 1.180 $\pm$ 0.015"
1.180 - 4.724 $\pm$ 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN S.LI	07/12/11'
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	C:/CONNEX/122122.DWG

Amphenol Connex

PART DESCRIPTION

TNC CRIMP JACK
(FOR RG-58C/U CABLE)

PART NO.

122122

DWG. NO. 122122.DWG

REV. C

SIZE A

SCALE NA

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[122122](#)