


GNL-3015xx

(Φ 3mm ROUND TYPE)

Bi-color series

ABSOLUTE MAXIMUM RATING:(Ta=25℃)

Parameter			Unit
DC Forward Current	30		mA
Reverse Voltage	5		V
Reverse Current (Vr=5V)	10		μA
Peak Forward Current ,tw ,=1 msec Duty ,=1/20	150		mA
Operation Temperature	-40	+80	℃
Storage Temperature	-40	+100	℃
Solder Dip Temperature (5 seconds,1.6mm from body)	300	±5	℃

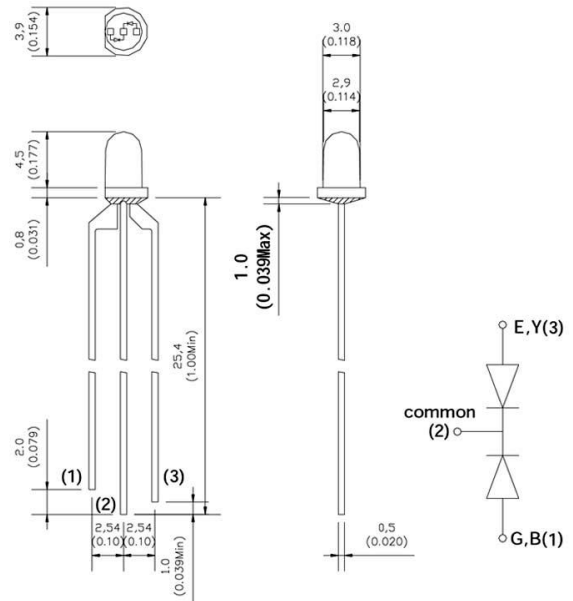

Part Number	EMITTED COLOR		Mix Emitted Color	Lens Color	Peak Wave length (nm)	Vf (v) Typ.	IV (If=20mA) mcd		View Angle 2 θ 1/2
							Min.	Typ.	
GNL-3015EGW	GaAsp/Gap	Hi-Eff Red	Orange	White	635	2.0	8.0	15	60°
	Gap	Green		Diffused	565	2.1	5.0	10	
GNL-3015YGW	Gap	Green	Yellow-Green	White	565	2.1	5.0	10	60°
	GaAsp	Yellow		Diffused	585	2.1	5.0	10	
GNL-3015UEUBW	AlGaInP	Super Red	Purple	White	625	2.0	120	200	60°
	InGaIn	Super Blue		Diffused	470	3.5	110	180	
GNL-3015UEUGW	AlGaInP	Super Red	Orange	White	625	2.0	120	200	60°
	AlGaInP	Super Green		Diffused	572	2.0	100	150	
GNL-3015EGC	GaAsp/Gap	Hi-Eff Red	Orange	Water Clear	635	2.0	20	40	30°
	Gap	Green			565	2.1	15	25	
GNL-3015UYUGC	AlGaInP	Super yellow	Yellow-Green	Water Clear	590	2.1	270	500	30°
	AlGaInP	Super Green			572	2.1	260	500	
GNL-3015UEUGC	AlGaInP	Super Red	Orange	Water Clear	625	2.0	280	500	30°
	AlGaInP	Super Green			572	2.0	260	350	
GNL-3015UEUBC	AlGaInP	Super Red	Purple	Water Clear	625	2.0	280	500	30°
	InGaIn	Super Blue			470	3.5	350	450	