

## B-S-1W Series DataSheet

1W, constant voltage input isolated non-regulated positive and negative output

DC-DC module power supply

- ◆ Sustainable short circuit protection
- ◆ Isolation voltage: 1500VDC
- ◆ Small SIP package, high power density
- ◆ Low ripple noise
- ◆ High efficiency, low loss
- ◆ This series module power supply is suitable for the occasions where the input voltage is stable, the output load changes little, and the stability of the output voltage is not required.



Selection list					
Model number	Input voltage rating (VDC) (Range value)	Output voltage(VDC) (typ)	Output currentmA) (max)	Full-load efficiency( %_ typ)	Maximum capacitive load(uF)
B0303S-1WR3	3.3 (2.97-3.63)	3.3	303	80	1000
B0305S-1WR3		5.0	200	80	1000
B0312S-1WR3		12	83	83	220
B0503S-1WR3	5.0 (4.50-5.50)	3.3	303	80	1000
B0505S-1WR3		5.0	200	81	1000
B0512S-1WR3		12	83	83	220
B0515S-1WR3		15	67	83	220
B0524S-1WR3		24	42	85	100
B1203S-1WR3	12 (10.80-13.20)	3.3	303	80	1000
B1205S-1WR3		5.0	200	82	1000
B1209S-1WR3		9.0	111	83	330
B1212S-1WR3		12	83	85	220
B1215S-1WR3		15	67	85	220
B1224S-1WR3		24	42	86	100
B1505S-1WR3	15 (14.50-16.50)	5.0	200	82	1000
B1509S-1WR3		9.0	111	83	330
B1512S-1WR3		12	83	85	220
B1515S-1WR3		15	67	85	220
B2403S-1WR3	24 (21.6-26.40)	3.3	303	80	1000

B2405S-1WR3		5.0	200	83	1000
B2409S-1WR3		9.0	111	83	330
B2412S-1WR3		12	83	86	220
B2415S-1WR3		15	67	86	220
B2424S-1WR3		24	42	87	100

**Input characteristic**

item	Working condition		Min	Typ	Max	unit
Input current (full load/no load)	3.3V input	3.3V , 5V exportation	--	370/10	378/15	mA
	5V input	3.3V , 5V exportation	--	243/5	251/10	
		12V , 15V exportation	--	235/15	241/20	
		24V exportation	--	230/10	235/15	
	12V input	3.3V , 5V , 9V exportation	--	101/5	105/10	
		12V , 15V exportation	--	96/5	98/10	
		24V exportation	--	95/10	97/15	
	15V input	5V , 9V exportation	--	79/5	82/10	
		12V , 15V exportation	--	77/5	79/10	
	24V input	5V , 9V exportation	--	51/5	53/10	
		12V , 15V exportation	--	47/5	49/10	
		24V exportation	--	43/5	45/10	
Input impulse voltage (1 second)	3.3V , 5V input		-0.3	--	8	Vdc
	12V input , 15V input		-0.3	--	20	
	24V input		-0.3	--	30	
Input filter	/		Capacitive filtering			
Hot swap	/		nonsupport			

**Output characteristic**

item	Working condition		Min	Typ	Max	unit
Output voltage accuracy	Rated input @ full load	3.3V, 5V exportation	-5	--	+3	%
		9V/12V/15V exportation	-3	--	+2	
		24V exportation	-2	--	+1	

**DC-DC module power supply**

Linear adjustment rate	The input voltage changes $\pm 1\%$	3.3Vexportation	--	--	1.5	
		Other voltage output	--	--	1.2	
Load adjustment rate	10%-100%load	3.3V , 5Vexportation	--	10	20	
		9/12/15Vexportation	--	6	15	
		24Vexportation	--	5	10	
Ripple & Noise	20MHz bandwidth@Vin_nom,100%load		--	50	120	mVp-p
Output short-circuit protection	/		Sustainable, self-healing			

**Other characteristics**


item	Working condition	Min	Typ	Max	unit
Insulation voltage	input-output, 60秒@Leakage	1500	--	1700	Vdc
Insulation resistance	currents $\leq 1\text{mA}$ input-output, Test voltage500VDC	1000	--	--	MΩ
Isolation capacitance	input-output, 100KHz/0.1V	--	30	--	pF
Switching frequency	100%load@Vin_nom	200	--	400	kHz
Operating ambient temperature	Meet the product characteristic curve	-40	--	+85	℃
Product working temperature	(4) 100%负载@Vin_nom,Ta=25℃	--	25	--	
Storage temperature		-55	--	+125	
Storage humidity	non-condensing	5	--	95	%RH
Coefficient of temperature drift	Nominal input @100% load	--	$\pm 0.03$	--	%/℃
Welding temperature	Hand welding	370 $\pm 10$ ℃@3 ~ 5Sec			
	Wave soldering welding	260 $\pm 10$ ℃@5 ~ 10Sec			
MTBF	MIL-HDBK-217F@25℃	2000	--	--	Kh
Housing material	Black flame-retardant plastic housing				
Package size	11.6*6*10.10mm (L*W*H)				
weight	1.2g(Typ)				
Cooling mode	Natural air cooling				

**EMC peculiarity**

EMI	Conduction disturbance	CISPR32/EN55032 CLASS B
	Radiation disturbance	CISPR32/EN55032 CLASS B
EMS	Electrostatic discharge	IEC/EN61000-4-2 Ari: $\pm 8\text{kV}$ , Contact $\pm 6\text{kV}$ perf.criterion B

### Product characteristic curve

### Temperature derating curve

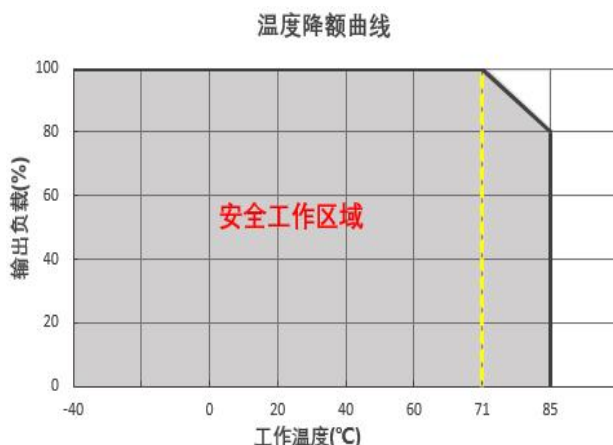

### Product use precautions

#### 1, input voltage stability considerations:

When the product is in use, the input voltage is required to be stable, because the fluctuation of the input voltage will lead to the instability of the output voltage, as shown in the "Output voltage and input voltage relationship curve" in the "Product Characteristic Curve (1)" chapter. As can be seen from the figure, the output voltage changes with the input voltage when the load is constant. Therefore, to obtain a stable output voltage, it is necessary to ensure the stability of the input voltage. This product is suitable for applications where the input voltage is stable or the variation range is relatively small.

#### 2, output load constancy consideration:

During the use of the product, the change of output load will also cause the change of output voltage, as shown in the "Relationship curve between output voltage and output load" in the section of "Product Characteristic Curve (2)". As can be seen from the figure, when the input voltage is stable, the output voltage changes with the change of the output current. In the design and selection stage of the power system, it is necessary to consider the load variation of the module power supply comprehensively, and evaluate whether the output voltage meets the design requirements according to the load variation range in the actual circuit. This product is suitable for applications where the load is constant or the range of variation is relatively small.

### 3, output ripple and noise suppression/output filter capacitor selection:

When the product is in use, the output end can be used normally without additional capacitance. To further reduce the output ripple and noise of the product, a filter capacitor can be applied to the output end of the product. However, it must be noted that the output can not increase the capacity of the electrolytic capacitor, too large capacity of the electrolytic capacitor may cause the output voltage of the module can not be established or even lead to product damage; Different types of output terminals have the requirements of "maximum capacitive load", in order to ensure the safe and reliable work of the product, in the output ripple and noise to meet the requirements of the premise, as far as possible to reduce the capacity of the output capacitance. See the Design Reference section for typical application circuits.

### 4, prevent product hot swap test or use:


Hot swap usually refers to plugging a product into or out of a circuit without the power supply being disconnected. The product does not support hot swap during use or testing. Because in the hot swap process, due to the current mutation will produce high voltage spikes, it is possible to cause product damage. Another case is to insert a mechanical switch between the power supply and the product input to control the power supply through the mechanical switch. Mechanical switches can also produce high pressure spikes during on-off operation, which may also lead to product damage. During the testing or use of the product, any operation that will produce high pressure spikes should not be ignored, and measures should be taken to prevent high pressure spikes from being directly added to the input end of the product, please refer to the Design reference section.

## Design reference

### 1Typical application circuit:

In the actual application circuit, due to the existence of a variety of interference noise, in order to make the product work stably and reliably, it is usually necessary to add a suitable absorption capacitance at the input end of the product; To further reduce the output ripple, a filter capacitor can be applied to the output, but the capacity should not be too large, see the "Product use Precautions" section. We recommend the use of MLCC capacitors, in order to ensure the safe and reliable operation of the product, its capacity can be referred to the following table.


Vin	Cin (MLCC)	Vo	Cout (MLCC)
3.3V	10uF/10V	3.3V	10uF/10V
5.0V	10uF/16V	5.0V	10uF/10V
12V, 15V	4.7uF/50V	12V/15V	4.7uF/25V
24V	4.7uF/50V	24V	2.2uF/50V

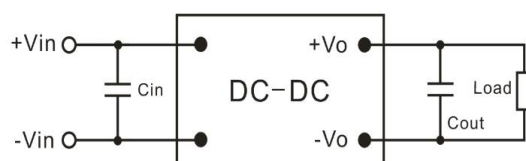


Note: In the application circuit, the input and output filter capacitors are as close as possible to the product pin; A 33uF/35V high frequency and low resistance electrolytic capacitor can be added to the input side to absorb surge voltage spikes from the supply side.

## 2. Applications with large dynamic load changes:

The output voltage of the product will change with the change of the output current (see the "Product Use Precautions" section), in the use of large dynamic load changes, in order to maintain the output voltage changes within a reasonable range, you can add a suitable resistance at the output end as a fixed load (commonly known as false load). However, it should be noted that the total load added to the output of the product (false load + actual maximum load) cannot exceed the rated load of the product. Its circuit is shown below:

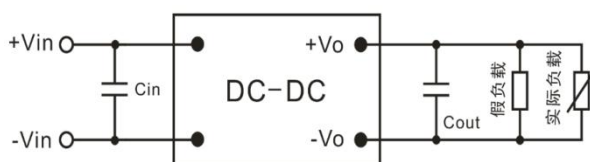


## 3、EMC recommended circuit (CLASS B) :

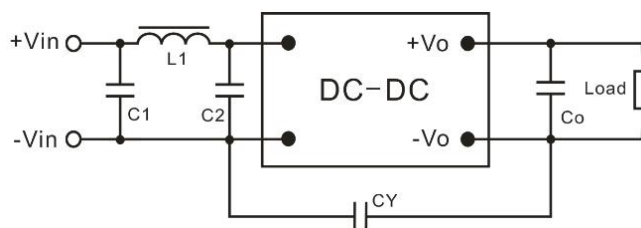

Vin	C1(MLCC)	L1	C2(MLCC)	Co(MLCC)	CY
3.3V	10uF/10V	33uH	10uF/10V	10uF/10V	470pF/2KV
5.0V	10uF/16V	33uH	10uF/16V	10uF/16V	
12V, 15V	4.7uF/50V	33uH	4.7uF/50V	4.7uF/50V	
24V	4.7uF/50V	33uH	4.7uF/50V	4.7uF/50V	1nF/2KV

### Appearance size and pin function

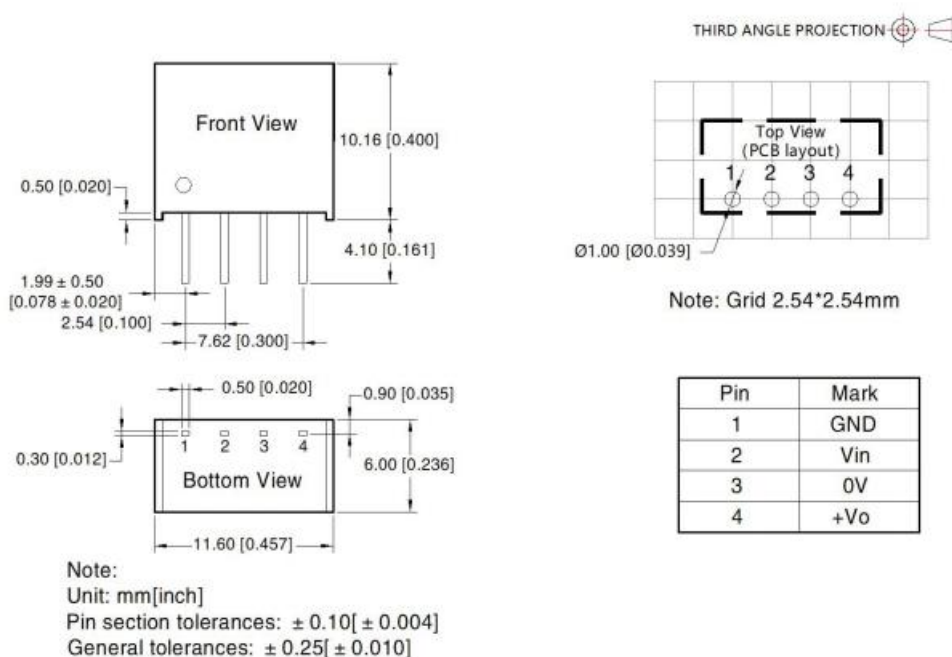

### Note:

1. For our specific packaging information, please refer to "Shipping Packaging Instructions";
2. If the working load of the product is lower than the minimum load requirements, we cannot guarantee that the product performance can meet all performance indicators;
3. The maximum capacitive load is tested in the input voltage range and under full load conditions;
4. Unless otherwise specified, all indicators in this manual are measured at  $T_a=25^{\circ}\text{C}$ , humidity <75%RH, nominal input voltage and rated output load;
5. All index test methods in this manual are based on the company's enterprise standards;
6. Our company can provide product customization, specific circumstances can directly contact our technical personnel;
7. Products related to laws and regulations: see "Product Characteristics", "EMC characteristics";
8. Our products shall be classified and stored in accordance with ISO14001 and relevant environmental laws and regulations after scrapping, and handed over to qualified units.