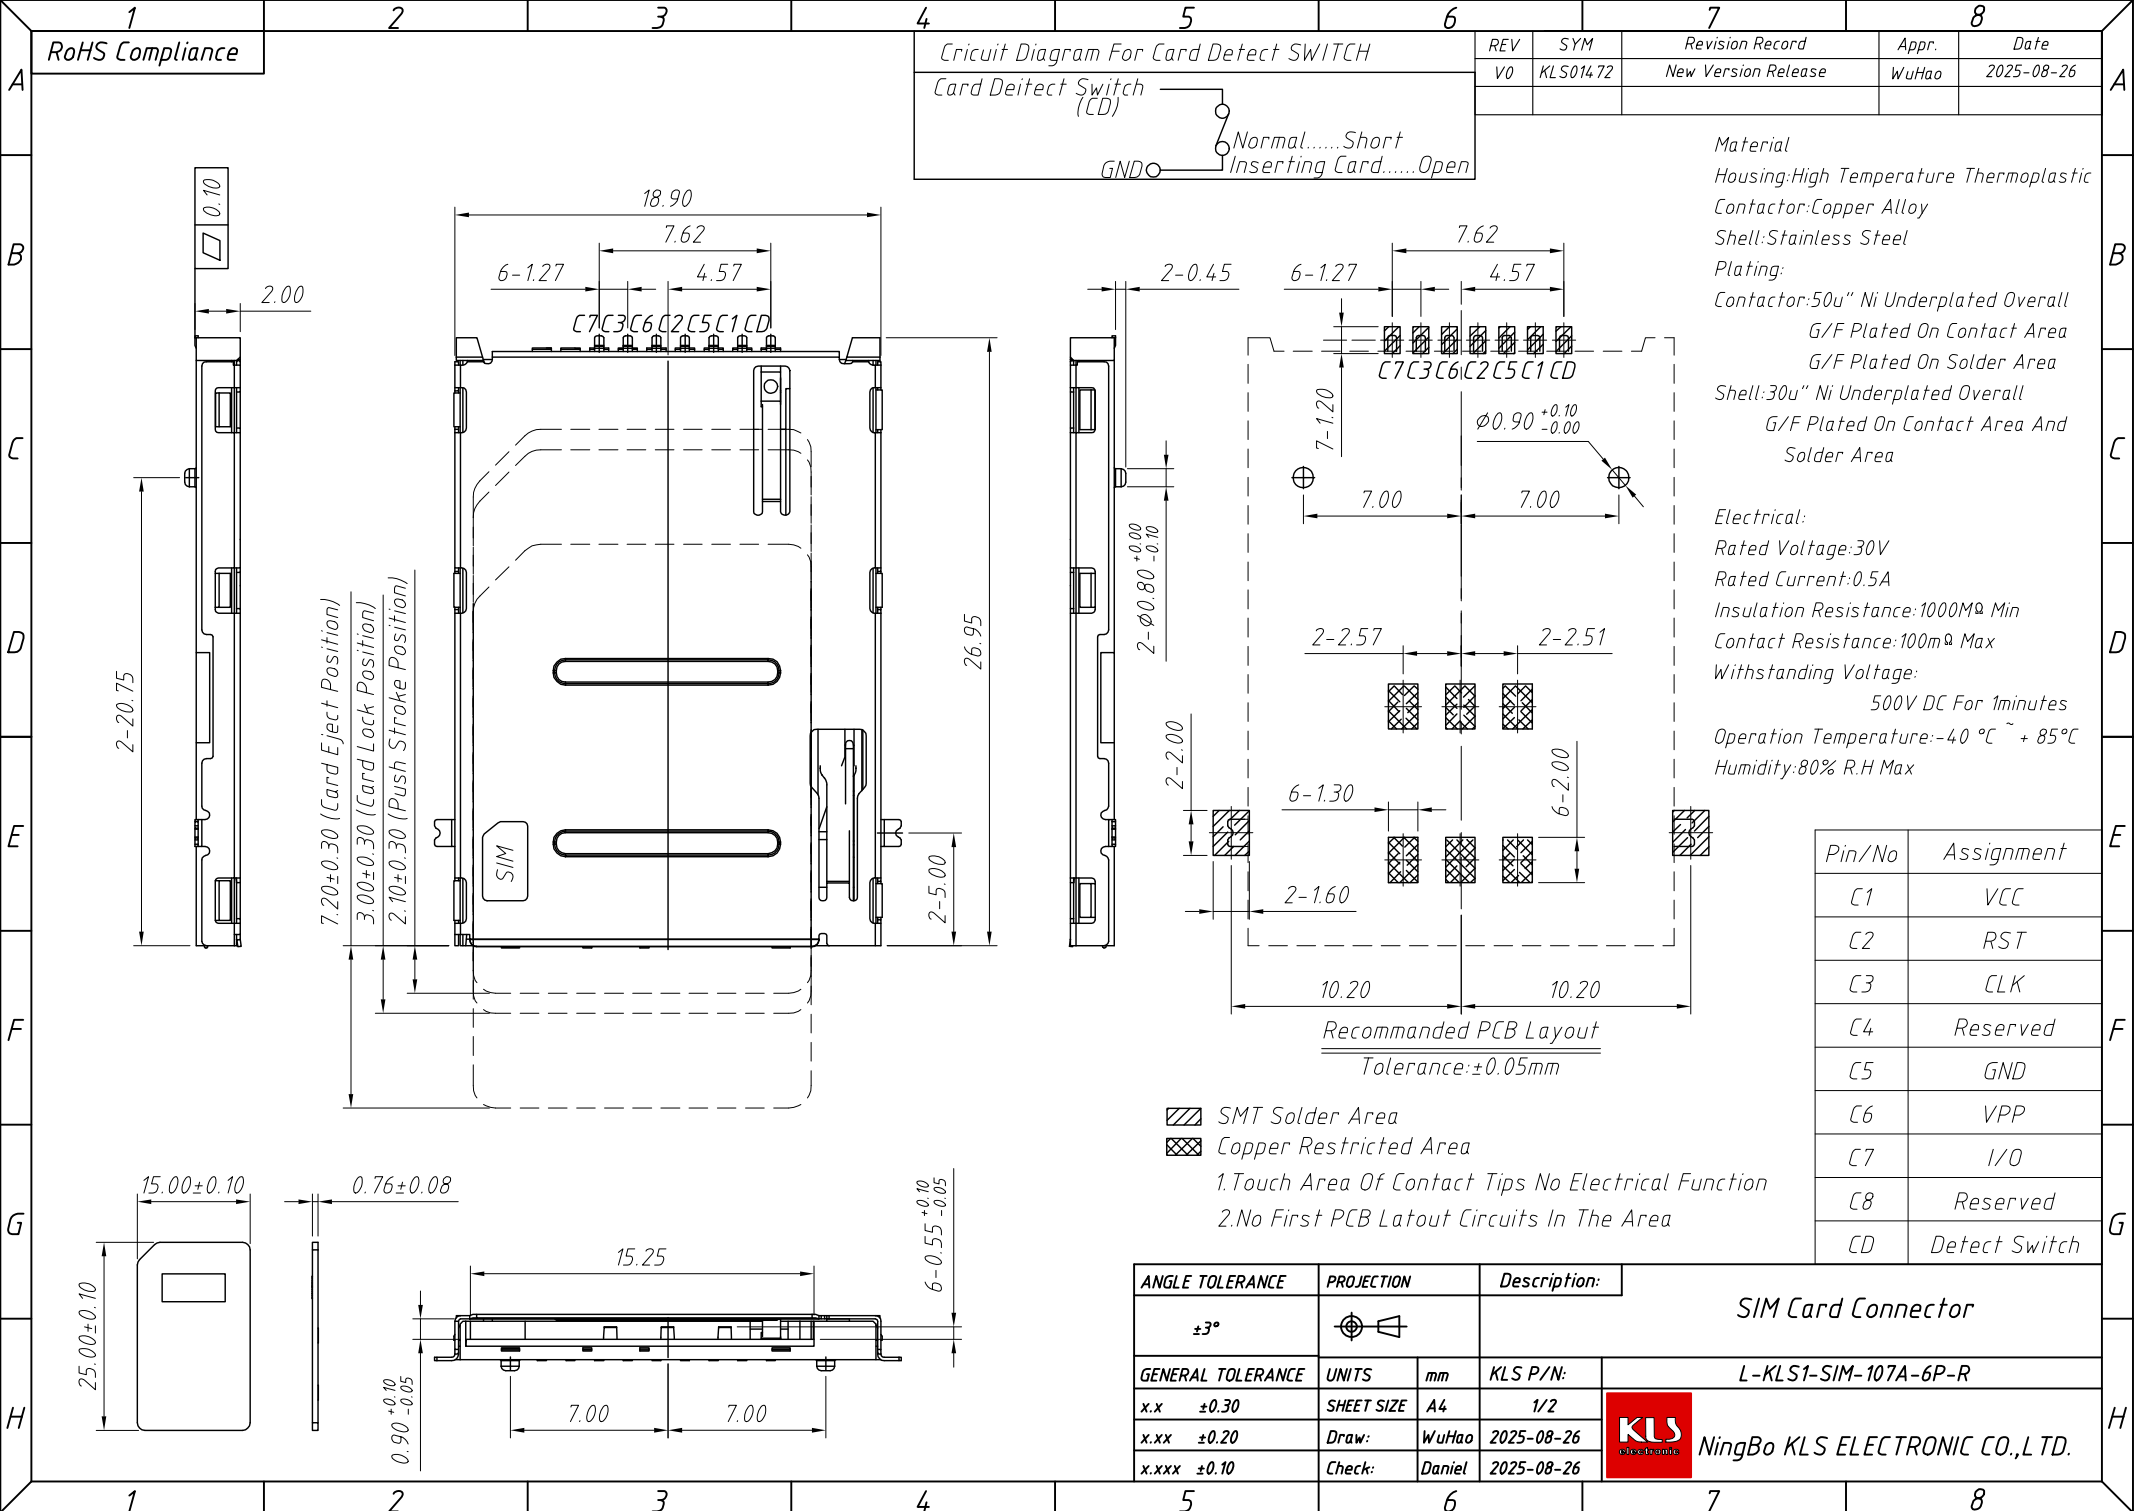


REV	SYM	Revision Record	Appr.	Date
V0	KLS014.72	New Version Release	WuHao	2025-08-26

Material

Housing:High Temperature Thermoplastic

Contact: Copper Alloy

Shell:Stainless Steel

Plating:

Contact:50u" Ni Underplated Overall
G/F Plated On Contact Area

Shell:30u" Ni Underplated Overall
G/F Plated On Contact Area And Solder Area

Electrical:

Rated Voltage:30V

Rated Current:0.5A

Insulation Resistance:1000MΩ Min

Contact Resistance:100mΩ Max

Withstanding Voltage:
500V DC For 1minutes

Operation Temperature:-40 °C ~ + 85°C


Humidity:80% R.H Max

Pin/No	Assignment
C1	VCC
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	VPP
C7	I/O
C8	Reserved
CD	Defect Switch

- SMT Solder Area
- Copper Restricted Area
- 1.Touch Area Of Contact Tips No Electrical Function
- 2.No First PCB Latout Circuits In The Area

ANGLE TOLERANCE	PROJECTION	Description:
±3°		SIM Card Connector
GENERAL TOLERANCE	UNITS	mm
x.x ±0.30	SHEET SIZE	A4
x.xx ±0.20	Draw:	WuHao 2025-08-26
x.xxx ±0.10	Check:	Daniel 2025-08-26

NingBo KLS ELECTRONIC CO.,LTD.

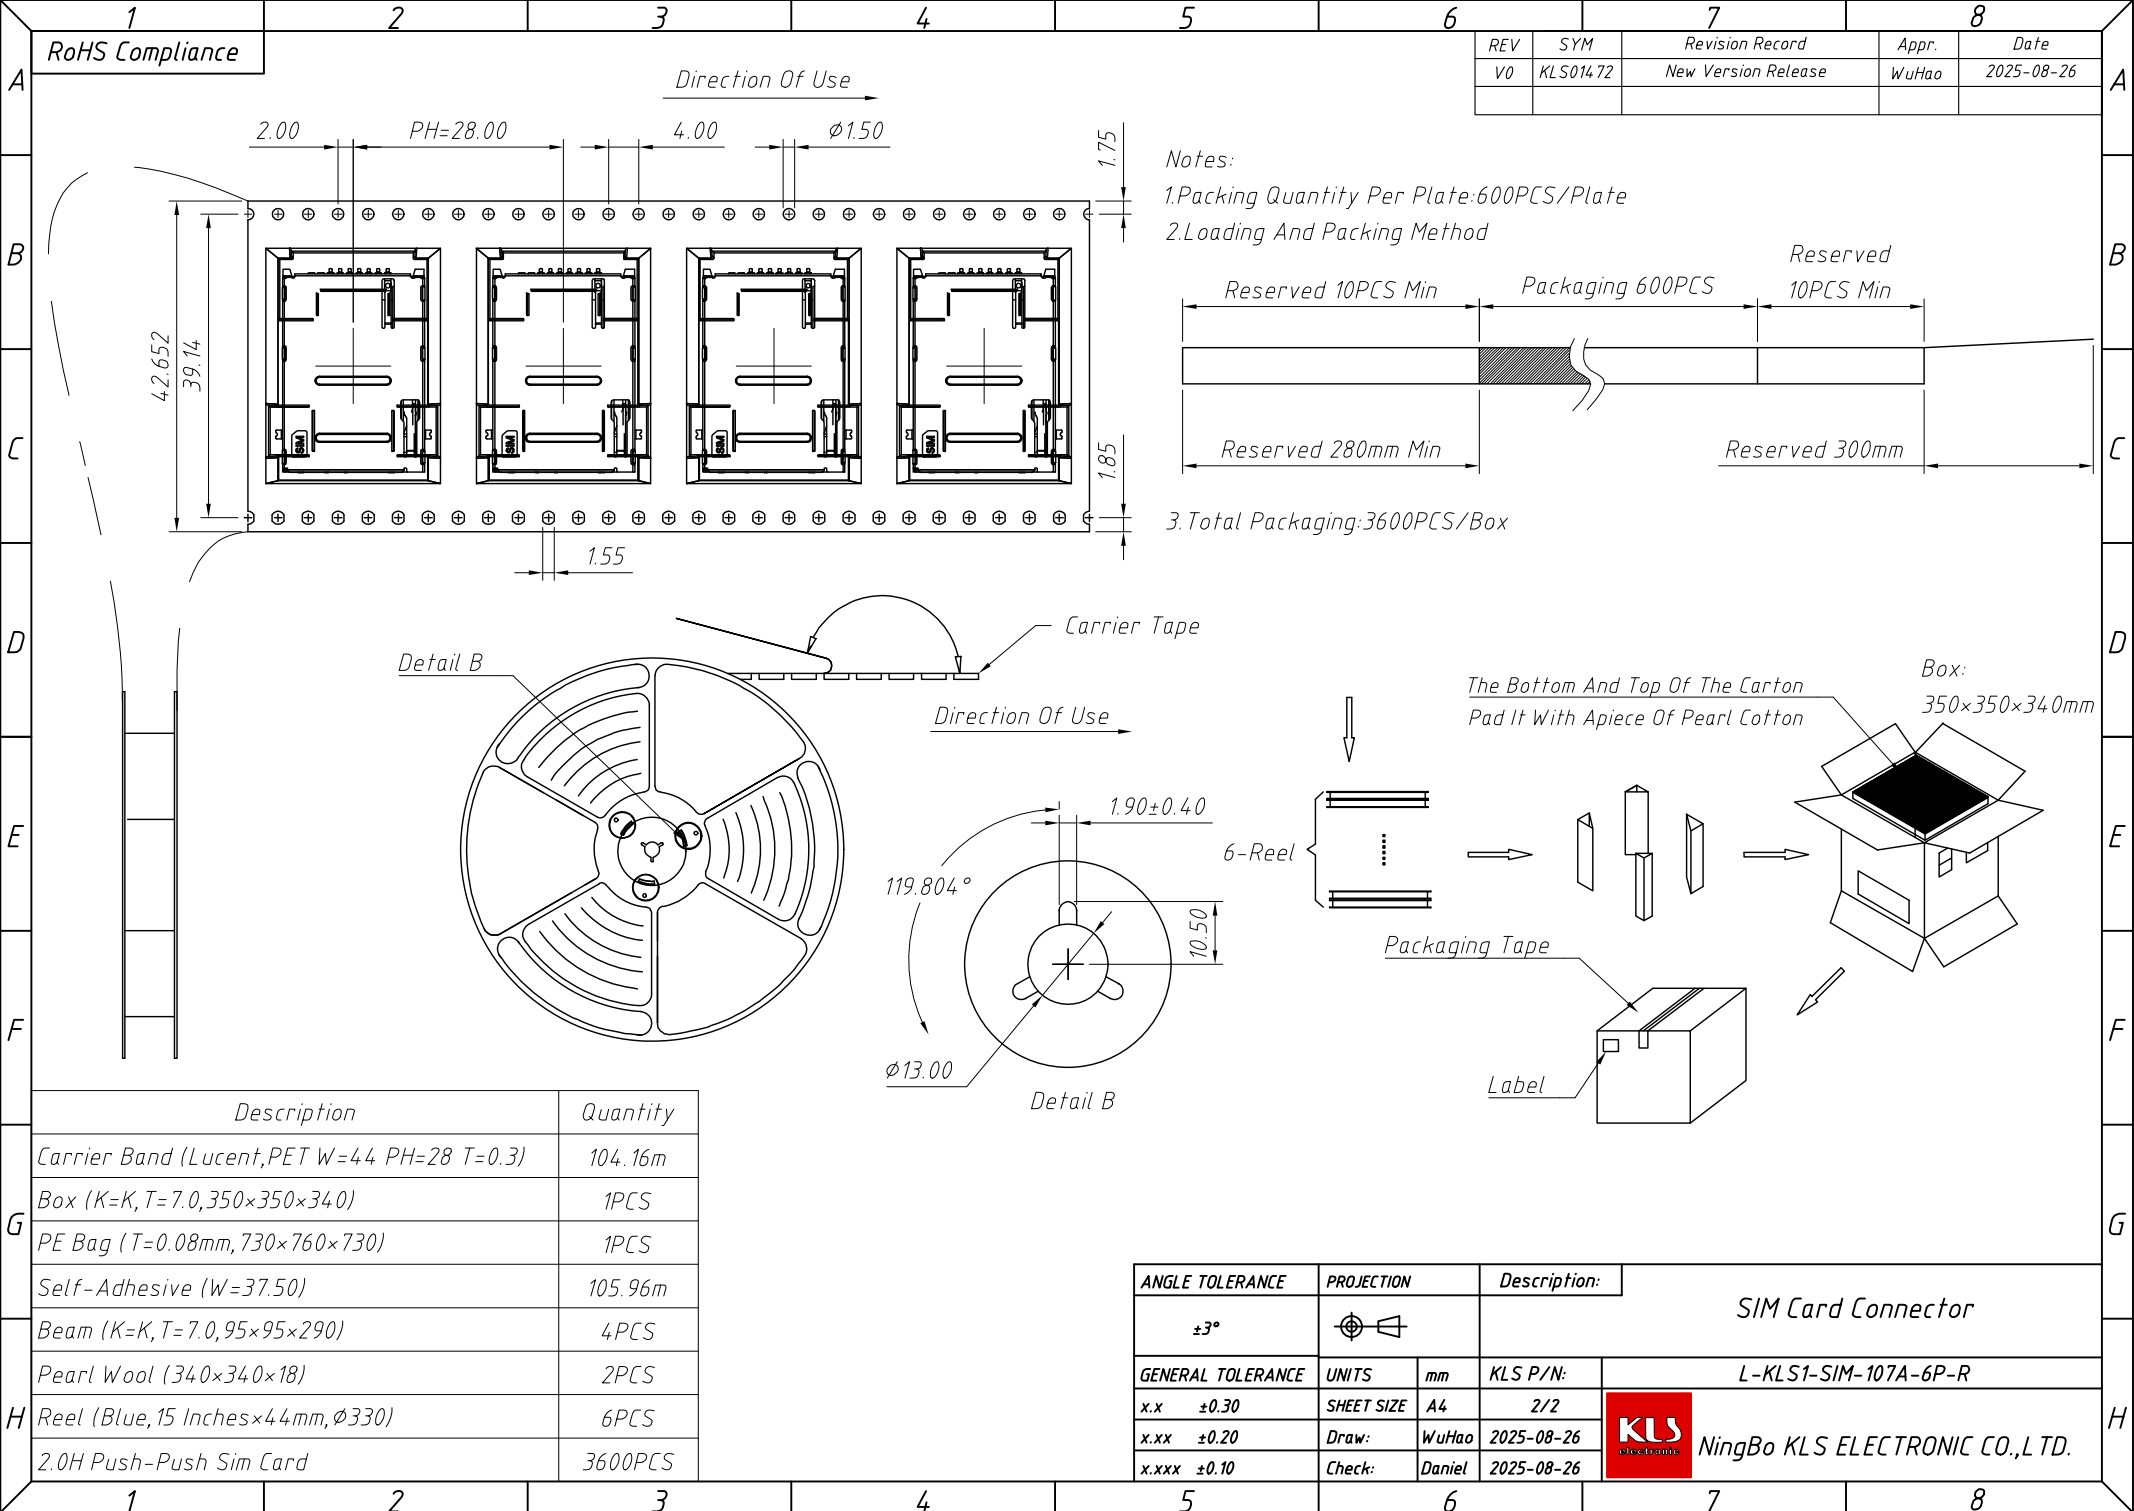


RoHS Compliance

Direction Of Use

REV	SYM	Revision Record	Appr.	Date
V0	KLS01472	New Version Release	WuHao	2025-08-26

Notes:

- 1.Packing Quantity Per Plate:600PCS/Plate
- 2.Loading And Packing Method

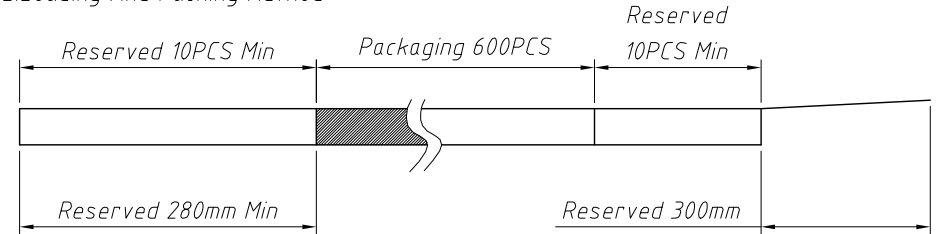

3.Total Packaging:3600PCS/Box

Detail B

Carrier Tape

Direction Of Use

The Bottom And Top Of The Carton
Pad It With A piece Of Pearl Cotton

Box:
350×350×340mm

6-Reel

Packaging Tape

Label

Description

Quantity

Carrier Band (Lucent,PET W=44 PH=28 T=0.3)	104.16m
Box (K=K,T=7.0,350×350×340)	1PCS
PE Bag (T=0.08mm,730×760×730)	1PCS
Self-Adhesive (W=37.50)	105.96m
Beam (K=K,T=7.0,95×95×290)	4PCS
Pearl Wool (340×340×18)	2PCS
Reel (Blue,15 Inches×44mm,Ø330)	6PCS
2.0H Push-Push Sim Card	3600PCS

ANGLE TOLERANCE	PROJECTION	Description:
±3°		SIM Card Connector
GENERAL TOLERANCE	UNITS	mm
x.x ±0.30	SHEET SIZE	A4
x.xx ±0.20	Draw:	WuHao 2025-08-26
x.xxx ±0.10	Check:	Daniel 2025-08-26

NingBo KLS ELECTRONIC CO.,LTD.