

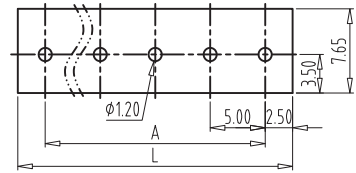
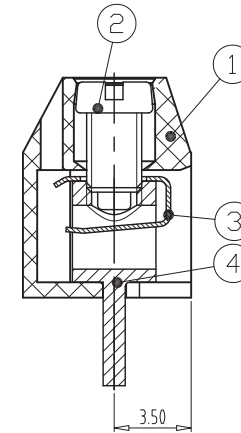



REV	CONTENT	CHK	DATE
-----	---------	-----	------

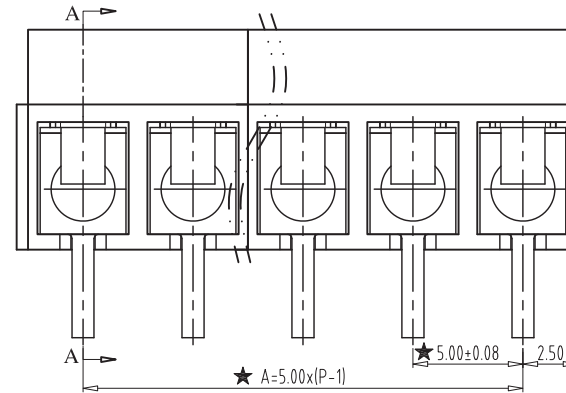

PCB LAYOUT
S=3:2

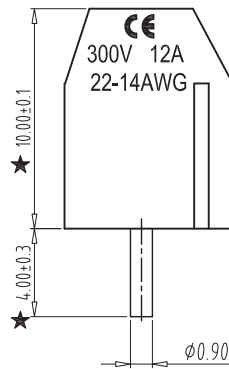


SECTION: A-A



NOTES:

- Rating: 300V 12;
- Insulation Withstands Voltage: AC2000V/MIN
- Insulation Resistance: 500MΩ or more at DC500V
- Using Temperature Range: -40°C/+105°C
- Screw Torque Value: 0.4N.m
- Suitable Electric Wire: 14-22AWG
- RoHS compliance
- "★" the important dimension.

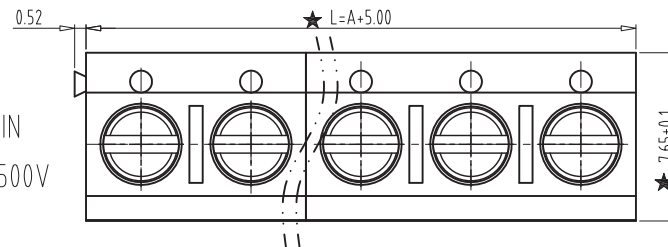

A	Total Pitch Tolerances in mm								Nominal dimension range in mm								$\perp$	$\equiv$	$-$	$//$					
	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 30	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 0	over 10		over 0	over 100	over 150
	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10	to 10	all	to 100	to 150	to 100	to 150
	± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.55	± 0.70	± 0.75	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.3	0.2	0.3	0.5
6						5						4													

			P	BRASS	Tin Plated
			P	STAINLESS STEEL	
			P	STEEL	Zn Plated
			/	PA66(V0)	02/03P
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	HUITAO	DATE	13.10.14	UNITS	mm
CHK.		DATE		SCALE	3 : 1
APP.		DATE			
			NAME	KSE-301-5.00-XX	
			DWGNO.		

