FILE:	02/

REV	CONTENT	CHK	DATE

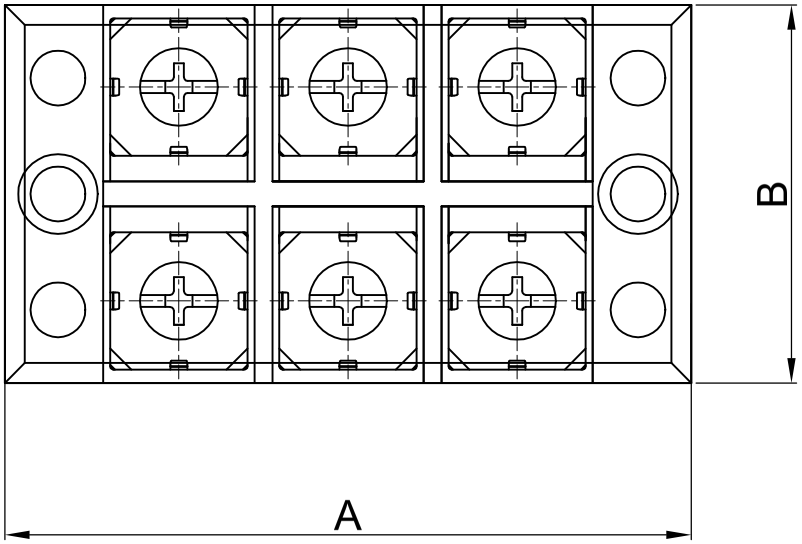

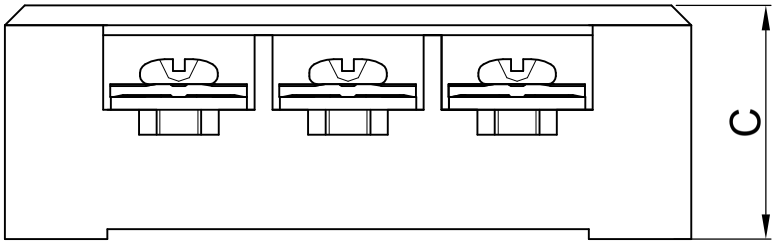

Technical Data:
Section(mm²): 0.5-4
Rated voltage(V)：600V
Insulation voltage(V)：600V
Rated current(A)：45A
Electrical clearance(mm): ⩾8
Creepage distance(mm): ⩾10
Torque(N.m): 4.4-6.6
Working ambient temperature：-40℃~+80℃
Connection method: Screw connection

Insulation material: PC black
Dust cover: PVC
Conductive body: Copper / Steel (-T)
Flame retardant grade：UL94 V-2

Position	Dimension		
	A	B	C
4503	70	38	23.5
4504	86	38	23.5
4506	120	38	23.5

Total Pitch Tolerances in mm									Nominal dimension range in mm									⊥		⌭	—	//	
over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 250	over 250 to 350	over 350 to 500	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 0 to 10	over 10	all	over 0 to 100	over 100 to 150	over 150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5

ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL			NOTE	
DWG.		DATE	/	SIZE	A4	UNITS	mm	SHEET/OF	1 / 1
CHK.		DATE		SCALE	1.5:1		//		
APP.		DATE		NAME	KSE-TB-45XX (-T)				
KEEN SIDE				DWGNO.					

REV:1.0

FORM: TF01