


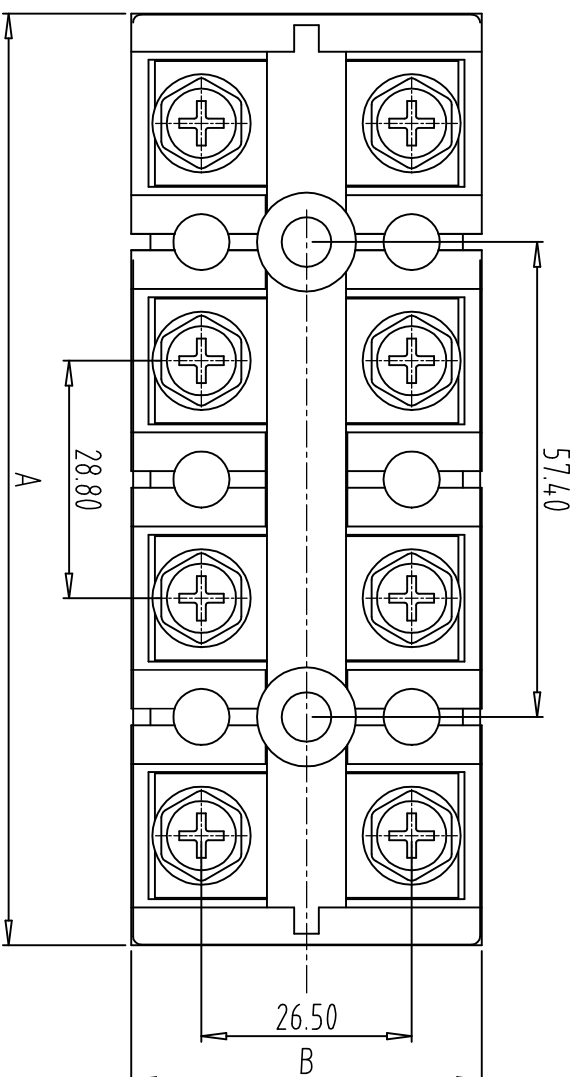

Technical Data:

Section(mm²): 6-14

Rated voltage(V): 660V

Insulation voltage(V): 660V

Rated current(A): 60A

Electrical clearance(mm): ≥ 8

Creepage distance(mm): ≥ 10

Torque(N.m): 4.4-6.6

Working ambient temperature: $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$

Connection method: Screw connection


Insulation material: PC black

Dust cover: PVC

Conductive body: Copper / Steel (-T)

Flame retardant grade: UL94 V-2

Position	Dimension		
	A	B	C
60003	85	43	32.5
60004	112	43	32.5
60006	139	43	32.5

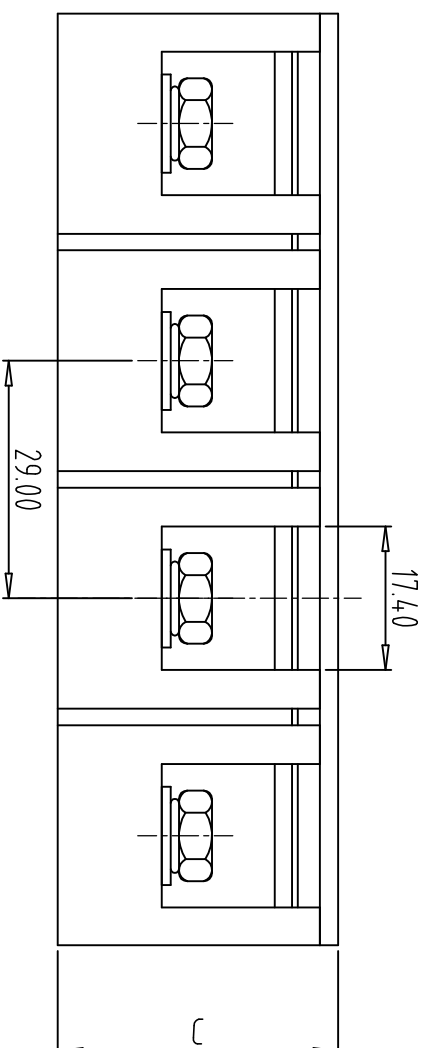[illegible]

ITEM	NAME OF PART	NO. OF PART	Q-TY	MATERIAL	NOTE
DWG.	ZX	DATE /	SIZE	A4	UNITS mm SHEET/OF 1/1
CHK.	DATE		SCALE	1:5.1	II
APP.	DATE		NAME		
			KSE-TB-60XX (-T)		
			DWGNO.		