


REV	CONTENT	CHK	DATE
V0.0	CONTENT	LZW	24.03.18

Electrical :


- 1.Rated Voltage : 250V
- 2.Rated Current : 25A
- 3.Wire Range: 0.2-4.0mm²
- 4.Stripping Length : 11-13mm
- 5.Operating Temperature : -20°C~+105°C
- 6.RoHS Compliance
- 7."★" is the key quality control point

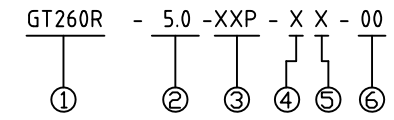

- ① Series NO.
- ② Pitch
- ③ Poles
02 02Contacts
03 03Contacts
...
12 12Contacts
- ④ 1 Single Pitch
2 Double Pitch
- ⑤ Color: 1 Grey
2 Blue
3 Black
4 Green
5 Orange
6 Red
7 Transparent
8 Yellow
9 White
- ⑥ Customer Request: 00--Standard

5	BUTTON	XX	P	PC	SEE NOTE
4	SHRAPNEL	XX	P	Stainless steel	/
3	CLAMP	XX	P	Copper Alloy	Tin Plated
2	COVER	XX	1	PC	SEE NOTE
1	HOUSING	XX	P	PC	SEE NOTE
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	24.03.18	SIZE	A4 UNITS mm SHEET/OF 1/1
CHK.		DATE		SCALE	1:1
APP.		DATE		NAME	GT260R-5.0-XXP-XX-00
				DWGNO.	XXXX

Grolten 宁波冠泰电子有限公司
NINGBO GOLTEN ELECTRONICS CO., LTD.

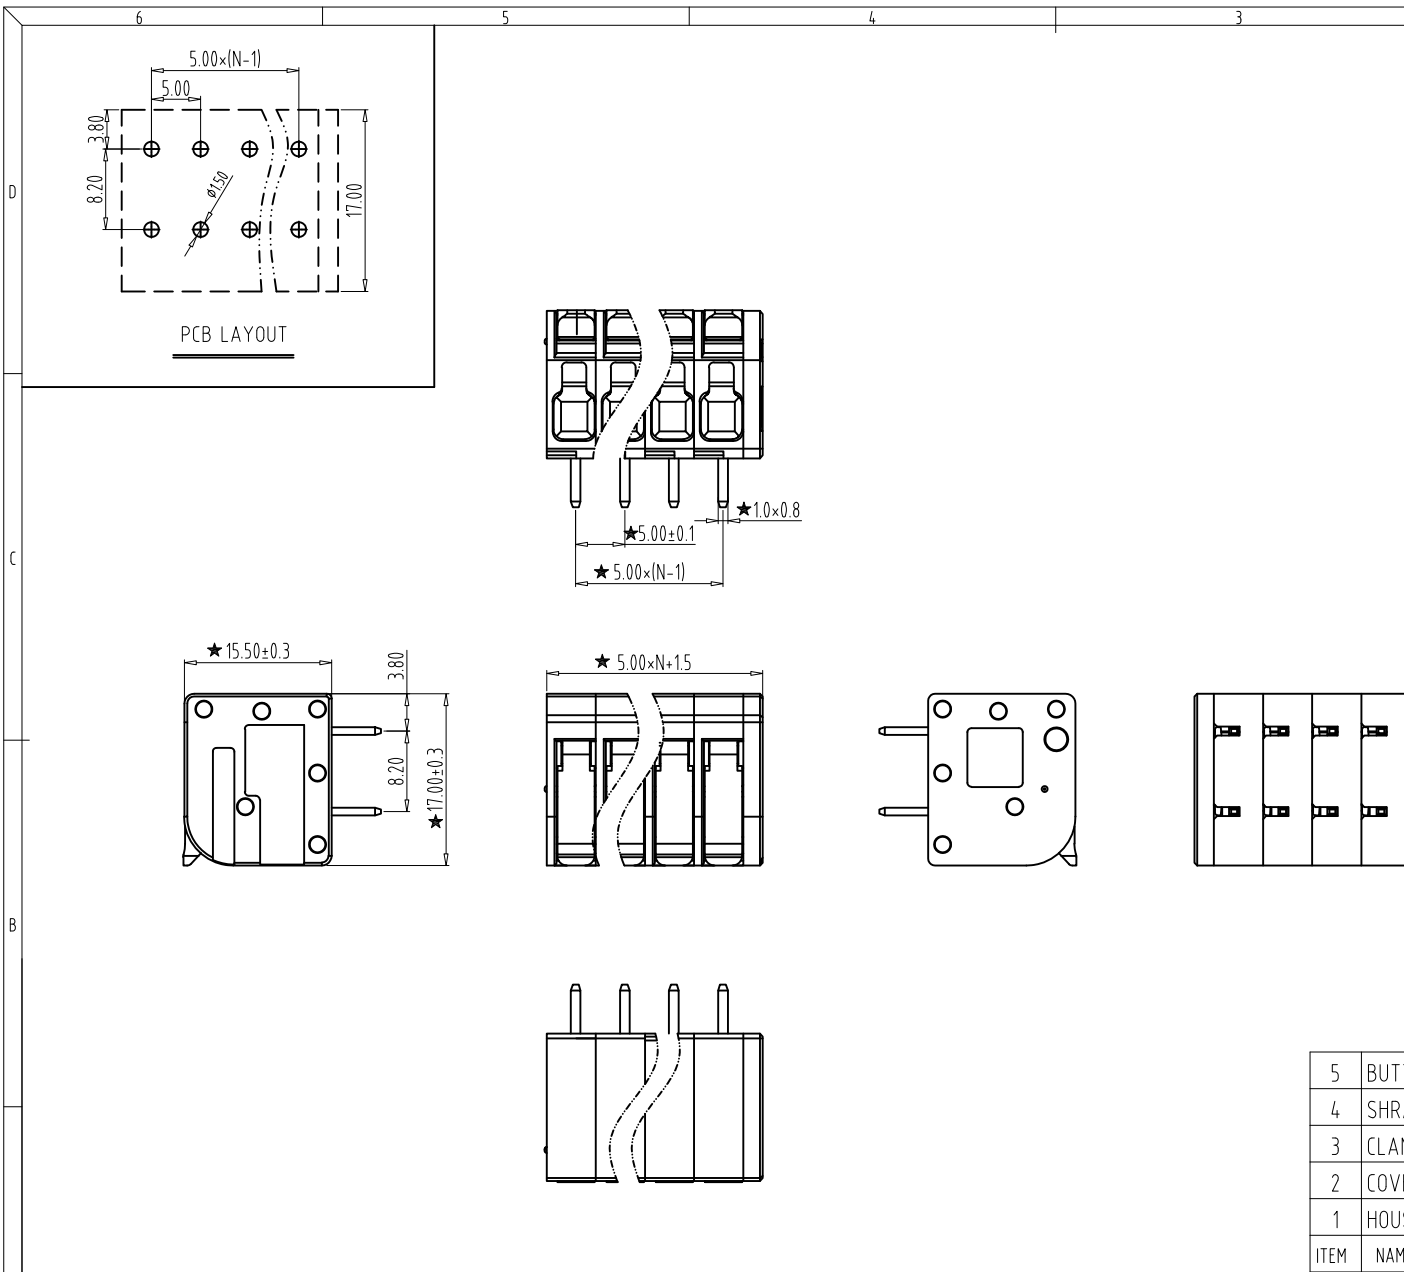

Total Pitch Tolerances in mm										Nominal dimension range in mm										⊥	≡	-	//		
over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 250	over 350	over 500	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 0	over 10	all	over 0	over 100	over 150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5		