


带★符号为重点尺寸 Key dimensions

Recommend p.c. Board Layout

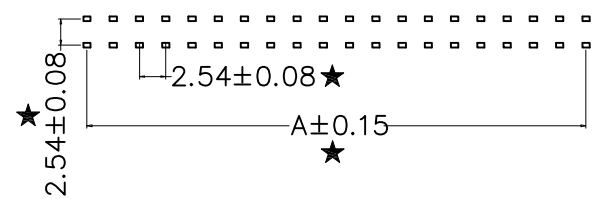

PART NO	Dim. A	Dim. B
FD-6P	5.08	12.98
FD-8P	7.62	15.52
FD-10P	10.16	18.06
FD-12P	12.7	20.60
FD-14P	15.24	23.14
FD-16P	17.78	25.68
FD-18P	20.32	28.22
FD-20P	22.86	30.76
FD-24P	27.94	35.84
FD-26P	30.48	38.38
FD-28P	33.02	40.92
FD-30P	35.56	43.46
FD-34P	40.64	48.54
FD-40P	48.26	56.16
FD-50P	60.96	68.86
FD-60P	73.66	81.56
FD-64P	78.74	86.64

MATERIAL&FINISH

Insulator: PA6T Glass Fiber(UL94V-0)

Contact : Brass

Contact : Gold-Plated Over Nickel.

SPECIFICATIONS

Current Rating : 3A AC,DC

Voltage Rating : 250V AC,DC

Temperature Range: -40°C To+105°C

Contact Resistance: 20mΩ Min

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/Min

Name to order: FDC-XX, where XX - number of contacts (06 - 64)

Total Pitch Tolerances in mm										Nominal dimension range in mm										⊥	≡	-	//				
over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	0	over 10	0	over 100	over 150	0	100	150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.3	0.2	0.3	0.5	0.2	0.3	0.5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	DATE		UNITS	mm	SHEET/OF 1 / 1
CHK.	DATE		SCALE	2.5:1	A4
APP.	DATE				
				NAME FDC-XX	
				DWGNO.	