

IEC62368-1
IEC61558-1/2-16
IEC61010-1/2-201
IEC60601-1
IEC60335-1
IEC62477-1



BS EN/IEC62368-1
BS EN/IEC61558-1/2-16
BS EN/IEC61010-1/2-201
BS EN/IEC60601-1
BS EN/IEC60335-1
BS EN/IEC62477-1



UL62368-1
UL61010-1/2-201
ANSI/AAMI/ES60601-1



UL61010-1



(Note.5) GB4943.1 CNS15598-1
KC62368-1 (By request) IS 13252
IS 13252 (By request) Note.7



IS 13252
KC62368-1 (By request) TPTC004



■ Features

- 85~305Vac input with PFC(277Vac available)
- No load power consumption <0.75W~1W by R.C.
- Global certificates in multi-fields
(ITE 62368-1, Medical 60601-1, Household 60335-1, Industrial 61558-1/2-16/61010-1, Energy converter 62477-1)
- 200% peak power capability(12~60V models)
- High efficiency up to 95%
- -40~+85°C wide range operation temperature(> +60°C derating)
- Extremely low leakage current<350µA, 2 x MOPP, suitable for BF medical applications
- Built-in constant current limiting circuit
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Forced air cooling by built-in DC fan with noise <45dB and fan ON/OFF control
- Built-in Remote ON/OFF control/Remote Sense/ DC OK signal
- Over voltage category III (OVC III)
- Operating altitude up to 5000 meters
- Conformal coating
- 5 years warranty

■ Description

The NSP-750 series is a 750W AC/DC power supply with PFC function, designed for high reliability and suitable for multiple industries. Key features include: compact size (199*105*41 mm) for better space utilization in system installations, ultra-wide input range of 85~305Vac for global compatibility, up to 95% efficiency and low standby power consumption (<0.75W~1W by models) for energy-saving and carbon reduction, constant current design with 200% peak power capability, wide operating temperature range from -40 to +85°C (+60°C at full load), compliance with OVCIII, built-in Remote Control/Remote Sense/DC OK signal, internal PCB coating, complete protections, certifications for multiple safety standards including 62368-1, 60601-1, 61558-1, 60335-1, 62477-1, and 61010-1, as well as 2 X MOPP compliance and extremely low leakage current (<350µA). It is suitable for BF-rated medical equipment and comes with a 5-years warranty, making it a highly cost-effective solution for industrial power supply needs.

■ Model Encoding

NSP - 750 - 24



■ Applications

- Industrial automation machinery/ control system
- Security system
- Mechanical and electrical equipment
- Electronic instruments, equipments or apparatus
- Network equipment
- Telecom devices
- Power sourcing equipment of PoE
- Home automation
- Medical devices
- Charging application

■ GTIN CODE


MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

SPECIFICATION		NSP-750-5	NSP-750-12	NSP-750-15	NSP-750-24	NSP-750-27	NSP-750-36	NSP-750-48	NSP-750-60
OUTPUT									
DC VOLTAGE	5V	12V	15V	24V	27V	36V	48V	60V	
RATED CURRENT	100A	62.5A	50A	31.3A	27.8A	20.9A	15.7A	12.6A	
CURRENT RANGE	0 ~ 100A	0 ~ 62.5A	0 ~ 50A	0 ~ 31.3A	0 ~ 27.8A	0 ~ 20.9A	0 ~ 15.7A	0 ~ 12.6A	
RATED POWER	500W	750W	750W	751.2W	750.6W	752.4W	753.6W	756W	
PEAK	CURRENT(5 sec.)	N/A	125A	100A	62.5A	55.6A	41.7A	31.3A	25A
	POWER(5 sec.)	N/A	1500W	1500W	1500W	1500W	1500W	1500W	1500W
RIPPLE & NOISE (max.)	Note.2	200mVp-p	200mVp-p	200mVp-p	240mVp-p	240mVp-p	240mVp-p	240mVp-p	300mVp-p
VOLTAGE ADJ. RANGE		4.7 ~ 5.5V	10.8 ~ 14V	15 ~ 19V	21 ~ 26V	26 ~ 32V	32 ~ 43V	44 ~ 57V	54 ~ 72V
VOLTAGE TOLERANCE	Note.3	±2.0%	±2.0%	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
LINE REGULATION		±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
LOAD REGULATION		±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
SETUP, RISE TIME		1500ms, 80ms/115Vac	1000ms, 80ms/230Vac	900ms, 80ms/277Vac					
HOLD UP TIME (Typ.)		16ms at full load							
INPUT									
VOLTAGE RANGE	Note.4	85 ~ 305Vac	120 ~ 431Vdc						
NO LOAD POWER CONSUMPTION(Typ.)	Remote Power OFF	0.75W/115Vac	0.75W/230Vac	1W/277Vac					
	Remote Power ON	5W/115Vac	5W/230Vac	5W/277Vac					
FREQUENCY RANGE		47 ~ 63Hz							
POWER FACTOR (Typ.)		PF>0.98/115Vac	PF>0.93/230Vac	PF>0.9/277Vac at full load					
EFFICIENCY (Typ.)		90%	92%	92%	94%	94%	95%	95%	95%
AC CURRENT (Typ.)		8.2A/115Vac	3.9A/230Vac	3.2A/277Vac					
INRUSH CURRENT (Typ.)		COLD START	20A/115Vac	40A/230Vac	50A/277Vac				
LEAKAGE CURRENT		Earth leakage current <350µA(rms)@277Vac, touch current<100µA(rms) @ 277Vac							
PROTECTION									
SHORT CIRCUIT	5V	Constant current limiting for more than 5 seconds (Vout<30%) and then hiccup mode, recovers automatically after fault condition is removed							
	12V ~ 60V	Constant current limiting for more than 5 seconds (Vout<30%) and then shut down o/p voltage, AC re-power on to recover or Hiccup mode, recovery automatically after fault condition is removed. Depends on the user's wire impedance							
OVERLOAD	5V	105%~150% rated output power; More than 5 seconds and then hiccup mode, recovers automatically after fault condition is removed							
	12V ~ 60V	Normally works within 105 ~ 200% rated output power for more than 5 seconds and then constant current limiting without shutdown(Vout>30%), recovers automatically after fault condition is removed, or shut down o/p voltage when Vout<30%, AC re-power on to recover							
		>200% rated power, constant current limiting (Vout>30%) with auto-recovery after fault condition is removed, or shut down o/p voltage when Vout<30%, AC re-power on to recover							
OVER VOLTAGE	5.8 ~ 7.5V	15 ~ 19V	20 ~ 25V	28 ~ 36V	33 ~ 42V	44 ~ 54V	58 ~ 70V	73 ~ 86V	
	Protection type : Shut down o/p voltage, AC re-power on to recover								
OVER TEMPERATURE		Shut down o/p voltage, recovers automatically after temperature goes down							
FUNCTION									
AUXILIARY POWER	5Vaux @ 0.2A	Tolerance -15% ~ +15% at main output 20% rated current							
	12Vaux @ 0.8A	Tolerance -15% ~ +15% at main output 20% rated current							
REMOTE CONTROL	POWER ON : short between RC+(pin11)&5V-AUX(pin13) on CN1								
	POWER OFF: open between RC+(pin11)&5V-AUX(pin13) on CN1								
REMOTE SENSE	Compensate voltage drop on the load wiring up to 0.3V. Please refer to the Function Manual								
DC OK SIGNAL	By phototransistor contact rating(max.):15Vdc/10mA resistive load. Please refer to the Function Manual.								
FAN NOISE(Typ.)	Fan ON/OFF control, RTH3≥50°C ±10°C FAN ON ; RTH3≤40°C ±10°C FAN OFF								
	45dB								
ENVIRONMENT									
WORKING TEMP.		-40 ~ +85°C (Refer to "Derating Curve")							
WORKING HUMIDITY		20 ~ 90% RH non-condensing							
STORAGE TEMP., HUMIDITY		-40 ~ +85°C, 10 ~ 95% RH non-condensing							
TEMP. COEFFICIENT		±0.05%/°C (0 ~ 60°C)							




SPECIFICATION		NSP-750-5	NSP-750-12	NSP-750-15	NSP-750-24	NSP-750-27	NSP-750-36	NSP-750-48	NSP-750-60																	
VIBRATION		10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes																								
SAFETY & EMC <small>(Note.5&6&7)</small>																										
SAFETY STANDARDS		CB	IEC62368-1, IEC60335-1, IEC61558-1/-2-16, IEC61010-1/-2-201, IEC60601-1; IEC62477-1	DEKRA	BS EN/EN62368-1, BS EN/EN60335-1, BS EN/EN61558-1/-2-16, BS EN/EN61010-1/-2-201, BS EN/EN60601-1(3.2 Version);BS EN/EN62477-1	UL	UL62368-1, ANSI/AAMI ES60601-1(3.2 Version),UL61010-1/-2-201	CCC	GB4943.1	BSMI	CNS15598-1	EAC	TP TC 004	SEMI F47 approved; KC/BIS KC62368-1 and BIS IS 13252(Part 1) certified, no stock by request, contact sales for inquires												
ISOLATION LEVEL	Note.8	Primary-Secondary: 2xMOPP, Primary-Earth: 1xMOPP, Secondary-Earth: 1xMOPP																								
OVER VOLTAGE CATEGORY	Note.9	IEC/EN 61558-1/-2-16	(OVC III, altitude up to 2000M)	IEC/EN/UL 62368-1	(OVC II, altitude up to 5000M)	IEC/EN 60335-1	(OVC II, altitude up to 5000M)	IEC/EN/ANSI/AAMI ES60601-1	(OVC II, altitude up to 4000M)	IEC/EN/UL 61010-1/-2-201	(OVC II, altitude up to 5000M)	IEC/EN 62477-1	(OVC II, altitude up to 5000M)													
SAFETY EXTRA-LOW VOLTAGE(SELV)		IEC/EN 61558-2-16 (SELV, 5 ~ 36V)		IEC/EN 60335-1 (SELV, 5 ~ 36V)		IEC/EN/UL 62368-1 (SELV/ES1, 5 ~ 36V)																				
WITHSTAND VOLTAGE		I/P-O/P:4.2KVac	I/P-FG:2.1KVac	O/P-FG:1.5KVac																						
ISOLATION RESISTANCE		I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH																								
EMC EMISSION	Parameter	Standard			Test Level / Note																					
	Conducted	BS EN/EN55032(CISPR32),CNS 15936,GB/T 9254.1,KS C 9832			Class B																					
		BS EN/EN55014-1(CISPR14-1)																								
		BS EN/EN55011(CISPR11)			Class B																					
	Radiated	BS EN/EN55032(CISPR32),CNS 15936,GB/T 9254.1,KS C 9832			Class B																					
		BS EN/EN55014-1(CISPR14-1)																								
		BS EN/EN55011(CISPR11)			Class B																					
	Harmonic Current	BS EN/EN61000-3-2(IEC61000-3-2),GB 17625.1			Class A																					
	Voltage Flicker	BS EN/EN61000-3-3(IEC61000-3-3)			-----																					
EMC IMMUNITY	BS EN/EN55035(CISPR35),BS EN/EN61000-6-2(IEC61000-6-2),BS EN/EN60601-1-2(IEC60601-1-2),BS EN/EN55014-2(CISPR14-2),KS C 9835,SEMI F47 tested at 200Vac																									
	Parameter	Standard			Test Level / Note																					
	ESD	BS EN/EN61000-4-2			Level 4, 15KV air ; Level 4, 8KV contact																					
	Radiated	BS EN/EN61000-4-3			Level 3, 10V/m(80MHz~2.7GHz) Table 9, 9~28V/m(385MHz~5.78GHz)																					
	EFT / Burst	BS EN/EN61000-4-4			Level 3, 2KV																					
	Surge	BS EN/EN61000-4-5			Level 4, 2KV/Line-Line 4KV/Line-Earth																					
	Conducted	BS EN/EN61000-4-6			Level 3, 10V																					
	Magnetic Field	BS EN/EN61000-4-8			Level 4, 30A/m																					
OTHERS		Voltage Dips and Interruptions								>95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods																
MTBF		1047.1 K hrs min. Telcordia SR-332 (Bellcore) ; 137.4K hrs min. MIL-HDBK-217F (25°C)																								
DIMENSION (L*W*H)		199*105*41mm																								
PACKING		1.23Kg;9pcs/12.1Kg/0.63 CUFT																								
NOTE																										
1. All parameters NOT specially mentioned are measured at 230Vac input, rated load and 25°C of ambient temperature.																										
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor.																										
3. Tolerance: includes set up tolerance, line regulation and load regulation.																										
4. Derating may be need under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.																										
5. The Regulatory Compliance Mark (RCM) is applied on a voluntary basis. The equipment meets the relevant IEC or AS/NZS standards, or AS/NZS 3820 where applicable. The use of the RCM mark complies with AS/NZS 4417.1.																										
6. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf)																										
7. Some factory or model may not have the BIS logo, please contact your MEAN WELL sales for more information.																										
8. MOPP is suitable for 100-240Vac input only.																										
9. The ambient temperature derating of 3.5°C/1000m with fanless models and 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft)..																										
※ Product Liability Disclaimer: For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx																										

Block Diagram

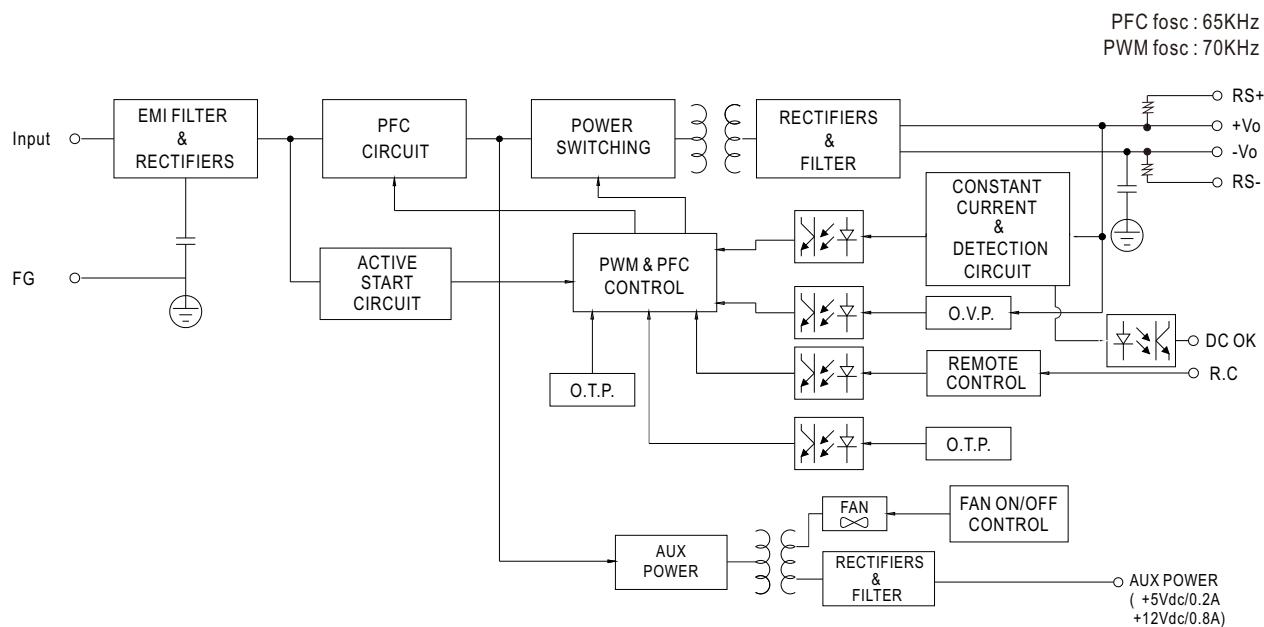


Derating Curve

Suitable for 100/110/115/120Vac System
(85~135Vac)

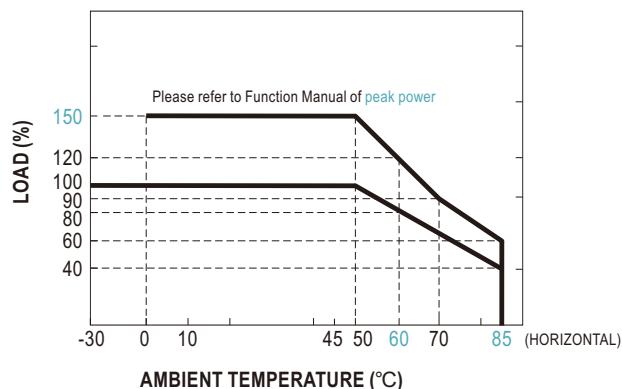


Suitable for 220/230/240/277Vac System
(180~305Vac)

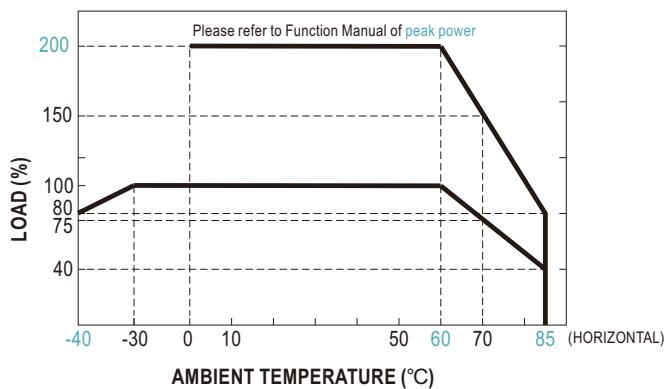

Note: Below 100Vac @ -30°C there may be a restart situation within 3 seconds after power-on

Output Derating vs Input Voltage

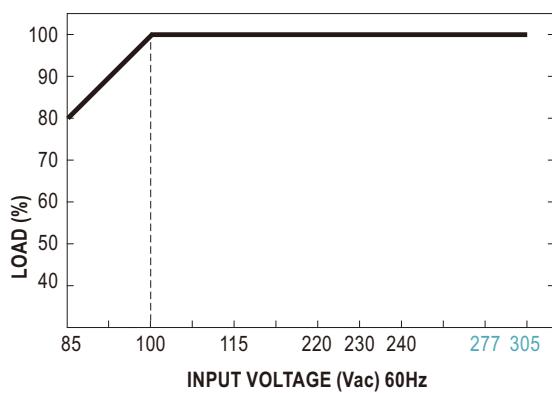


■ Function Manual

1. Peak Power

$$P_{av} = \frac{P_{pk} \times t + P_{npk} \times (T-t)}{T} \leq P_{rated}$$

$$\text{Duty} = \frac{t}{T} \times 100\% \leq 35\%$$

$t \leq 5 \text{ sec}$

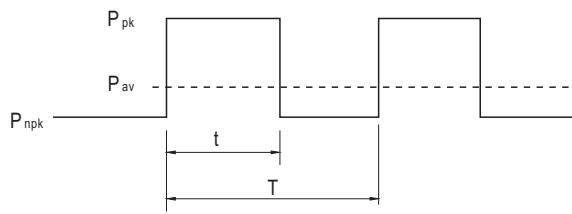

P_{av} : Average output power (W)

P_{pk} : Peak output power (W)


P_{npk} : Non-peak output power (W)

P_{rated} : Rated output power (W)

t : Peak power width (sec)

T : Period (sec)

--- 100Vac
— 200Vac

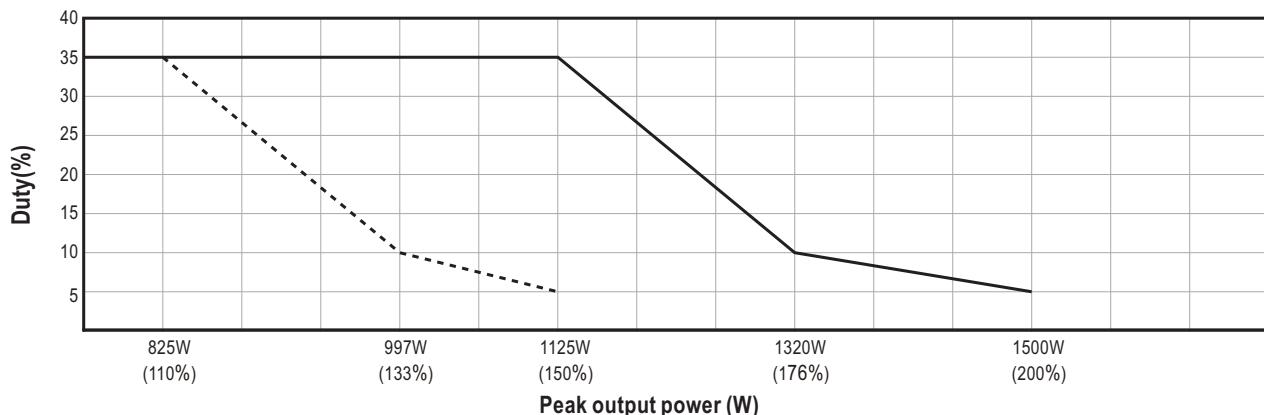

For example (24V model) :

$V_{in} = 200\text{Vac}$ Duty_max = 5%

$$P_{av} = P_{rated} = 750\text{W}$$

$$P_{pk} = 1500\text{W}$$

$t \leq 5 \text{ sec}$

$$T \geq \frac{5 \text{ sec}}{5\%} \geq 100\text{sec}$$

$$P_{npk} \leq \frac{T P_{av} - t P_{pk}}{T-t}$$


$$P_{npk} \leq 710\text{W}$$

Note: When the output voltage is adjusted to the upper limit, the peak power is 150% rated power.

2. Remote Control


The PSU can be turned ON/OFF by using the "Remote Control" function with external switch.

PSU Vo Status	Between RC+ (pin11) and 5V-AUX(pin13) on CN1
POWER ON	SW close (Short)
POWER OFF	SW open (Open)

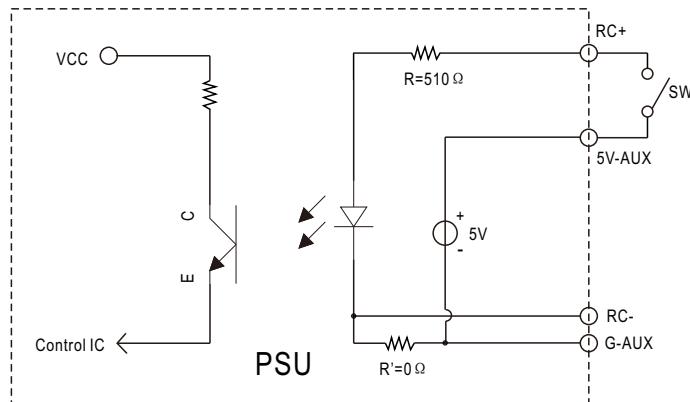

3. Remote Sense

The remote sensing compensates voltage drop on the load wiring up to 0.3Vdc.

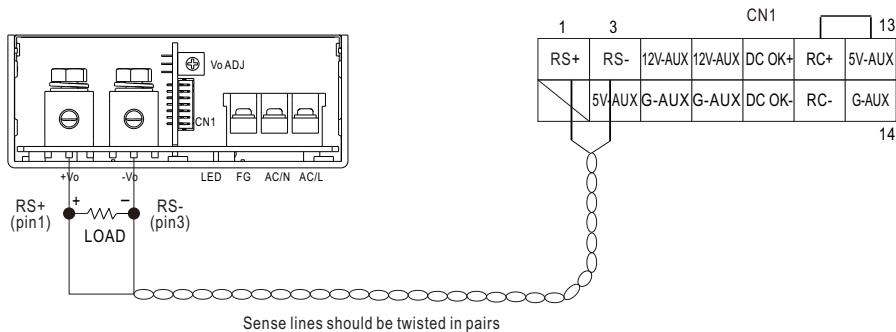


4. DC_OK signal

DC_OK is a collector shorted signal. It is used by an optocoupler in the power supply which indicates the output status of the power supply as exhibited below.

PSU Vo Status	Photo transistor
POWER ON	Conduct(Low impedance)
POWER OFF	Open(High impedance)


Optocoupler Rating(max.) 15Vdc/10mA resistive load

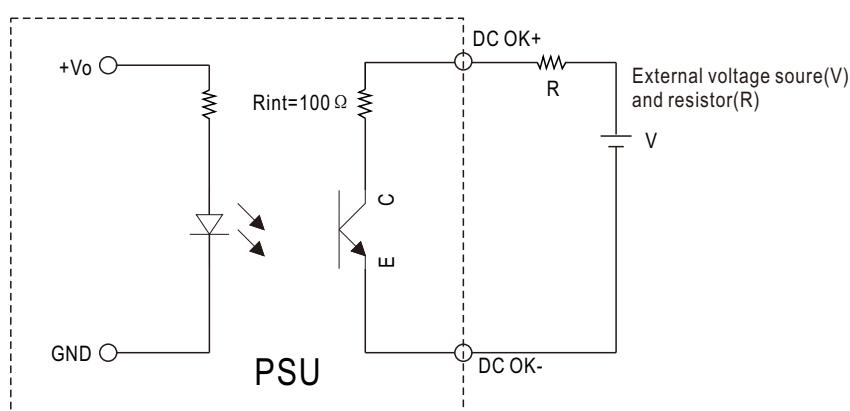

■ Mechanical Specification

 (Unit: mm, tolerance $\pm 1\text{mm}$)

Case No.980D

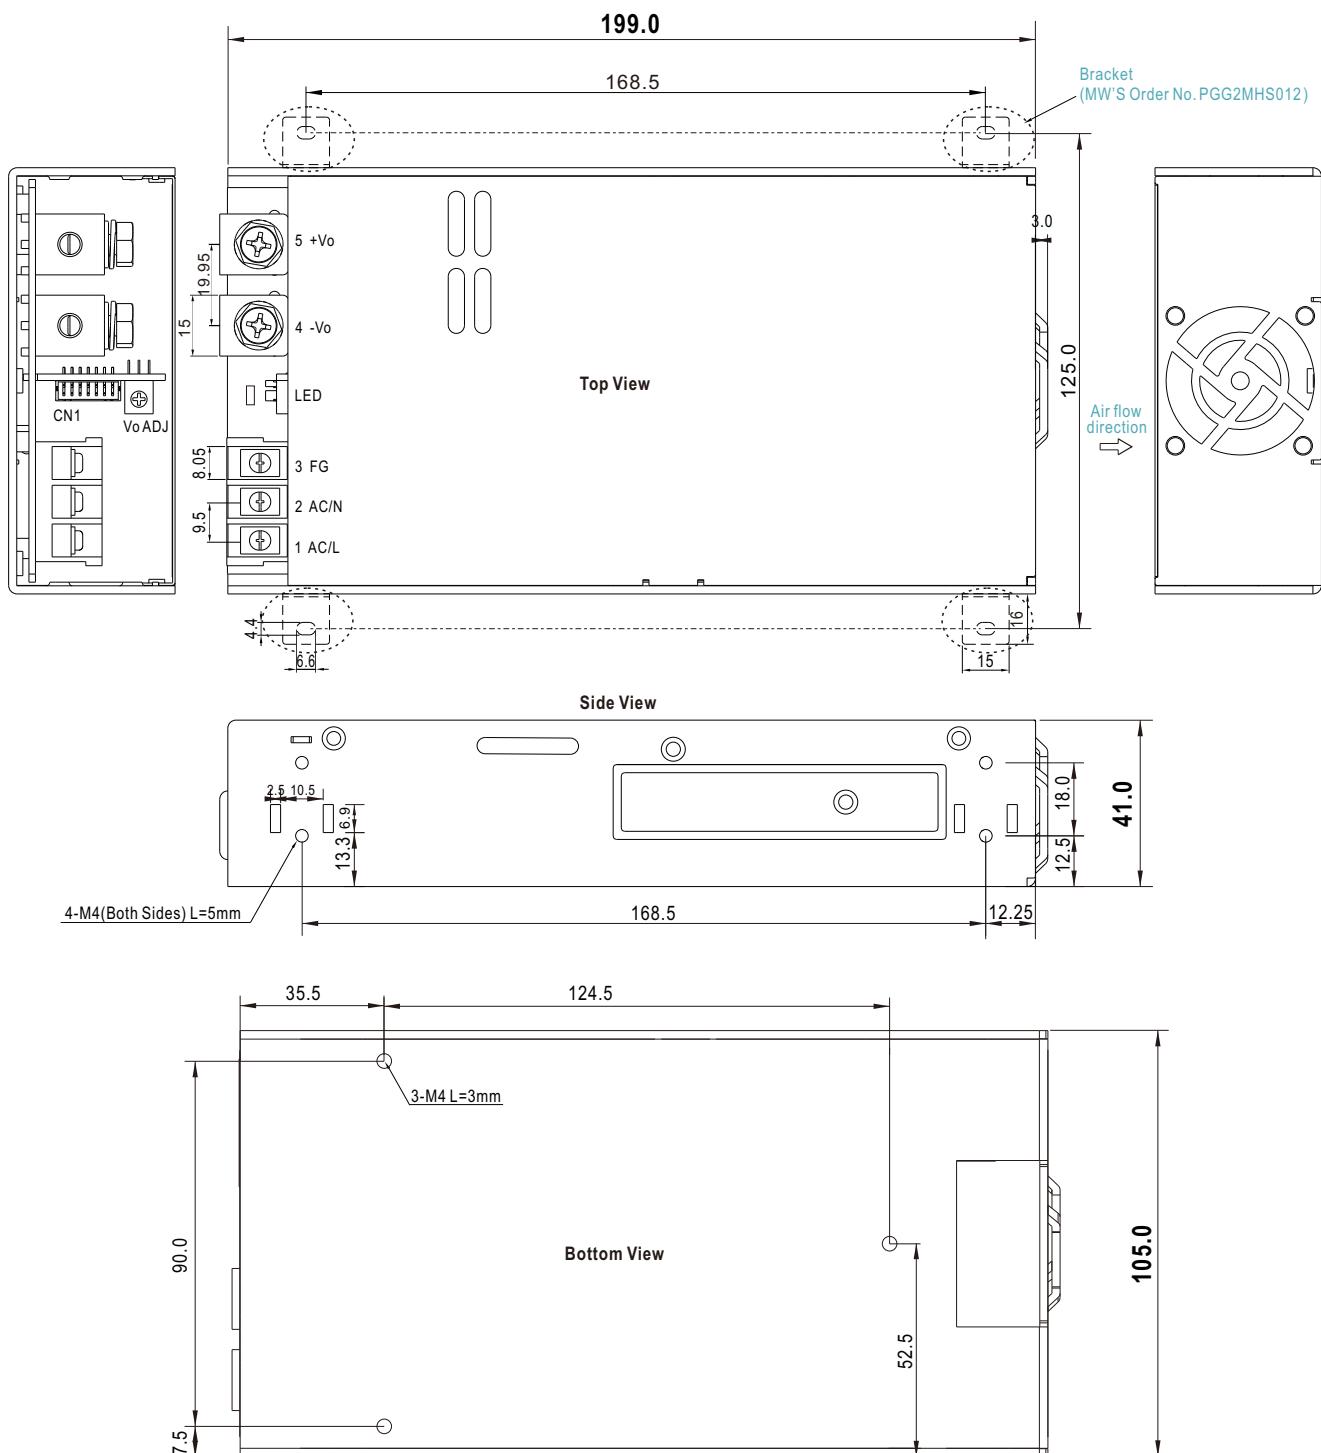

※ AC Input Terminal Pin No. Assignment

Pin No.	Assignment	Diagram	Screw Size	Maximum mounting torque
1	AC/N or DC input -Vin			
2	AC/L or DC input +Vin			
3	FG \oplus		M3.5	8~10Kgf-cm

※ DC Output Terminal Pin No. Assignment


Pin No.	Assignment	Diagram	Screw Size	Maximum mounting torque
4	-Vo			
5	+Vo		M5	10~12Kgf-cm


※ Control Pin No. Assignment (CN1) : HRS DF11-14DP-2DS or equivalent

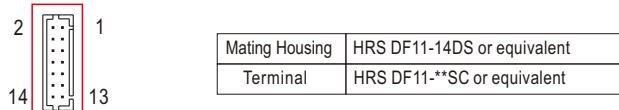

Pin No.	Function	Description
1	RS+	Positive sensing for remote sense.
2	NC	Reserve
3	RS-	Negative sensing for remote sense.
4,13	5V-AUX	Auxiliary voltage output, 4.25~5.75Vdc, referenced to pin 6,8,14(G-AUX). The maximum load current is 0.2A. This output is not controlled by the "remote ON/OFF control".
5,7	12V-AUX	Auxiliary voltage output, 10.2~13.8Vdc, referenced to pin 6,8,14(G-AUX). The maximum load current is 0.8A. This output is not controlled by the "remote ON/OFF control".
6,8,14	G-AUX	Auxiliary voltage output ground. The signal return is isolated from the output terminals (+Vo & -Vo).
9	DC OK+	Positive sensing for DC OK.
10	DC OK-	Negative sensing for DC OK.
11	RC+	Turns the output on and off by electrical or dry contact between pin 11 (RC+) and pin 13 (5V-AUX). Short: Power ON, Open: Power OFF.
12	RC-	The output is internally connected to pin 6,8,14(G-AUX).

■ Accessory List

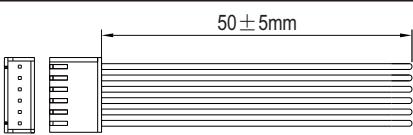No.	Item	Quantity
1	Control function interface(CN1) mating wire along with NSP-750 (standard accessory)  	1pcs/per model
2	Bracket MW'S Order NO. :PGG2MHS012 (By request accessory, should ordered separately)	4pcs/per model (Please refer to Installation Diagram)
3	Terminal cover MW'S Order NO. : PEE4TBC-03 (By request accessory, should ordered separately)	1pcs/per model

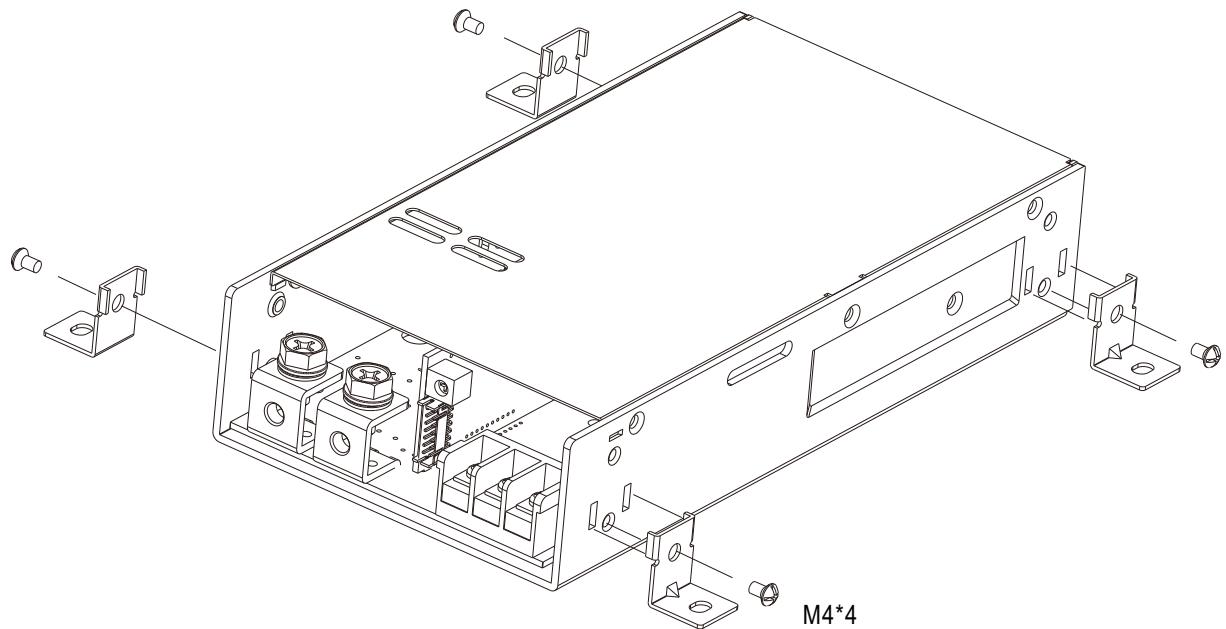■ Installation Diagram**■ Installation Manual**

Please refer to : <http://www.meanwell.com/manual.html>