


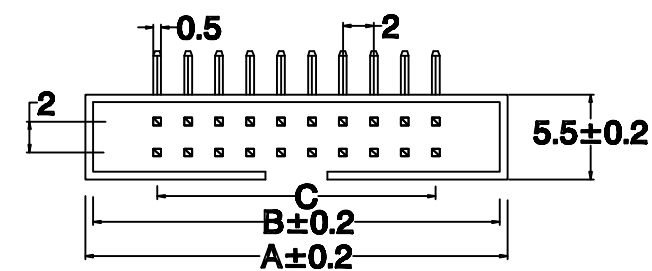


SPECIFICATIONS
Current Rating:3Amps
Insulation Resistance:1000M Ω min
Withstanding Voltage: 1000VAC
Contact Resistance:20mΩ max
Operating Temperature:-40° C to+105° C
Standard:PBT
Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Max. Processing Temp:180 °Cfor30-60second
(200 °Cfor10second)

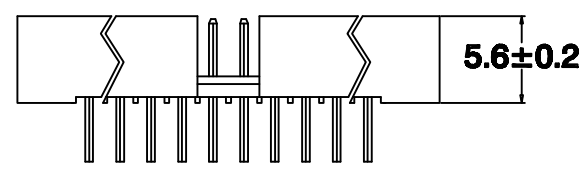

No. of	DIN. A	DIN. B	DIN. C	No. of	DIN. A	DIN. B	DIN. C	No. of	DIN. A	DIN. B	DIN. C
6	13.30	12.30	4.00	26	33.30	32.30	24.00	46	53.30	52.30	44.00
8	15.30	14.30	6.00	28	35.30	34.30	26.00	48	55.30	54.30	46.00
10	17.30	16.30	8.00	30	37.30	36.30	28.00	50	57.30	56.30	48.00
12	19.30	18.30	10.00	32	39.30	38.30	30.00	52	59.30	58.30	50.00
14	21.30	20.30	12.00	34	41.30	40.30	32.00	54	61.30	60.30	52.00
16	23.30	22.30	14.00	36	43.30	42.30	34.00	56	63.30	62.30	54.00
18	25.30	24.30	16.00	38	45.30	44.30	36.00	58	65.30	64.30	56.00
20	27.30	26.30	18.00	40	47.30	46.30	38.00	60	67.30	66.30	58.00
22	29.30	28.30	20.00	42	49.30	48.30	40.00	62	69.30	68.30	60.00
24	31.30	30.30	22.00	44	51.30	50.30	42.00	64	71.30	70.30	64.00

Total Pitch Tolerances in mm										Nominal dimension range in mm										⊥	≡	-	//	
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	0	over	0	100	over
0	30	53	70	90	115	150	200	250	320	0	30	53	70	90	115	150	200	250	320	0	10	all	100	150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5	

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.		DATE	UNITS	mm	SHEET/OF 1 / 1
CHK.		DATE	SCALE	1:1	A4
APP.		DATE			
			NAME	BH2-XXR	
			DWGNO.		

