


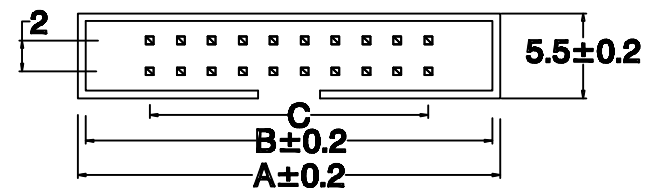


SPECIFICATIONS
Current Rating: 3Amps
Insulation Resistance: 1000M Ω min
Withstanding Voltage: 1000VAC
Contact Resistance: 20m Ω max
Operating Temperature: -40° C to +105° C
Standard: PBT
Contact Material: Brass
Contact Plating: Au or Sn Over Ni
Max. Processing Temp: 180 °C for 30-60 second
(200 °C for 10 second)

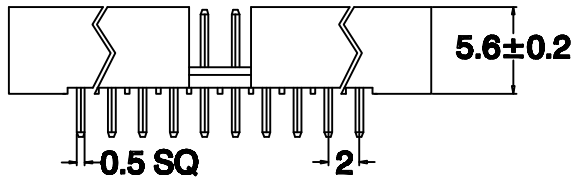

No. of	DIN. A	DIN. B	DIN. C	No. of	DIN. A	DIN. B	DIN. C	No. of	DIN. A	DIN. B	DIN. C
6	13.30	12.30	4.00	26	33.30	32.30	24.00	46	53.30	52.30	44.00
8	15.30	14.30	6.00	28	35.30	34.30	26.00	48	55.30	54.30	46.00
10	17.30	16.30	8.00	30	37.30	36.30	28.00	50	57.30	56.30	48.00
12	19.30	18.30	10.00	32	39.30	38.30	30.00	52	59.30	58.30	50.00
14	21.30	20.30	12.00	34	41.30	40.30	32.00	54	61.30	60.30	52.00
16	23.30	22.30	14.00	36	43.30	42.30	34.00	56	63.30	62.30	54.00
18	25.30	24.30	16.00	38	45.30	44.30	36.00	58	65.30	64.30	56.00
20	27.30	26.30	18.00	40	47.30	46.30	38.00	60	67.30	66.30	58.00
22	29.30	28.30	20.00	42	49.30	48.30	40.00	62	69.30	68.30	60.00
24	31.30	30.30	22.00	44	51.30	50.30	42.00	64	71.30	70.30	64.00

Total Pitch Tolerances in mm										Nominal dimension range in mm										⊥	≡	-	//											
over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10	to 10	all	to 0	to 100	to 150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.3	0.2	0.3	0.5										

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.		DATE	UNITS	mm	SHEET/OF 1 / 1
CHK.		DATE	SCALE	1:1	A4
APP.		DATE			
				NAME	BH2-XX
				DWGNO.	

