


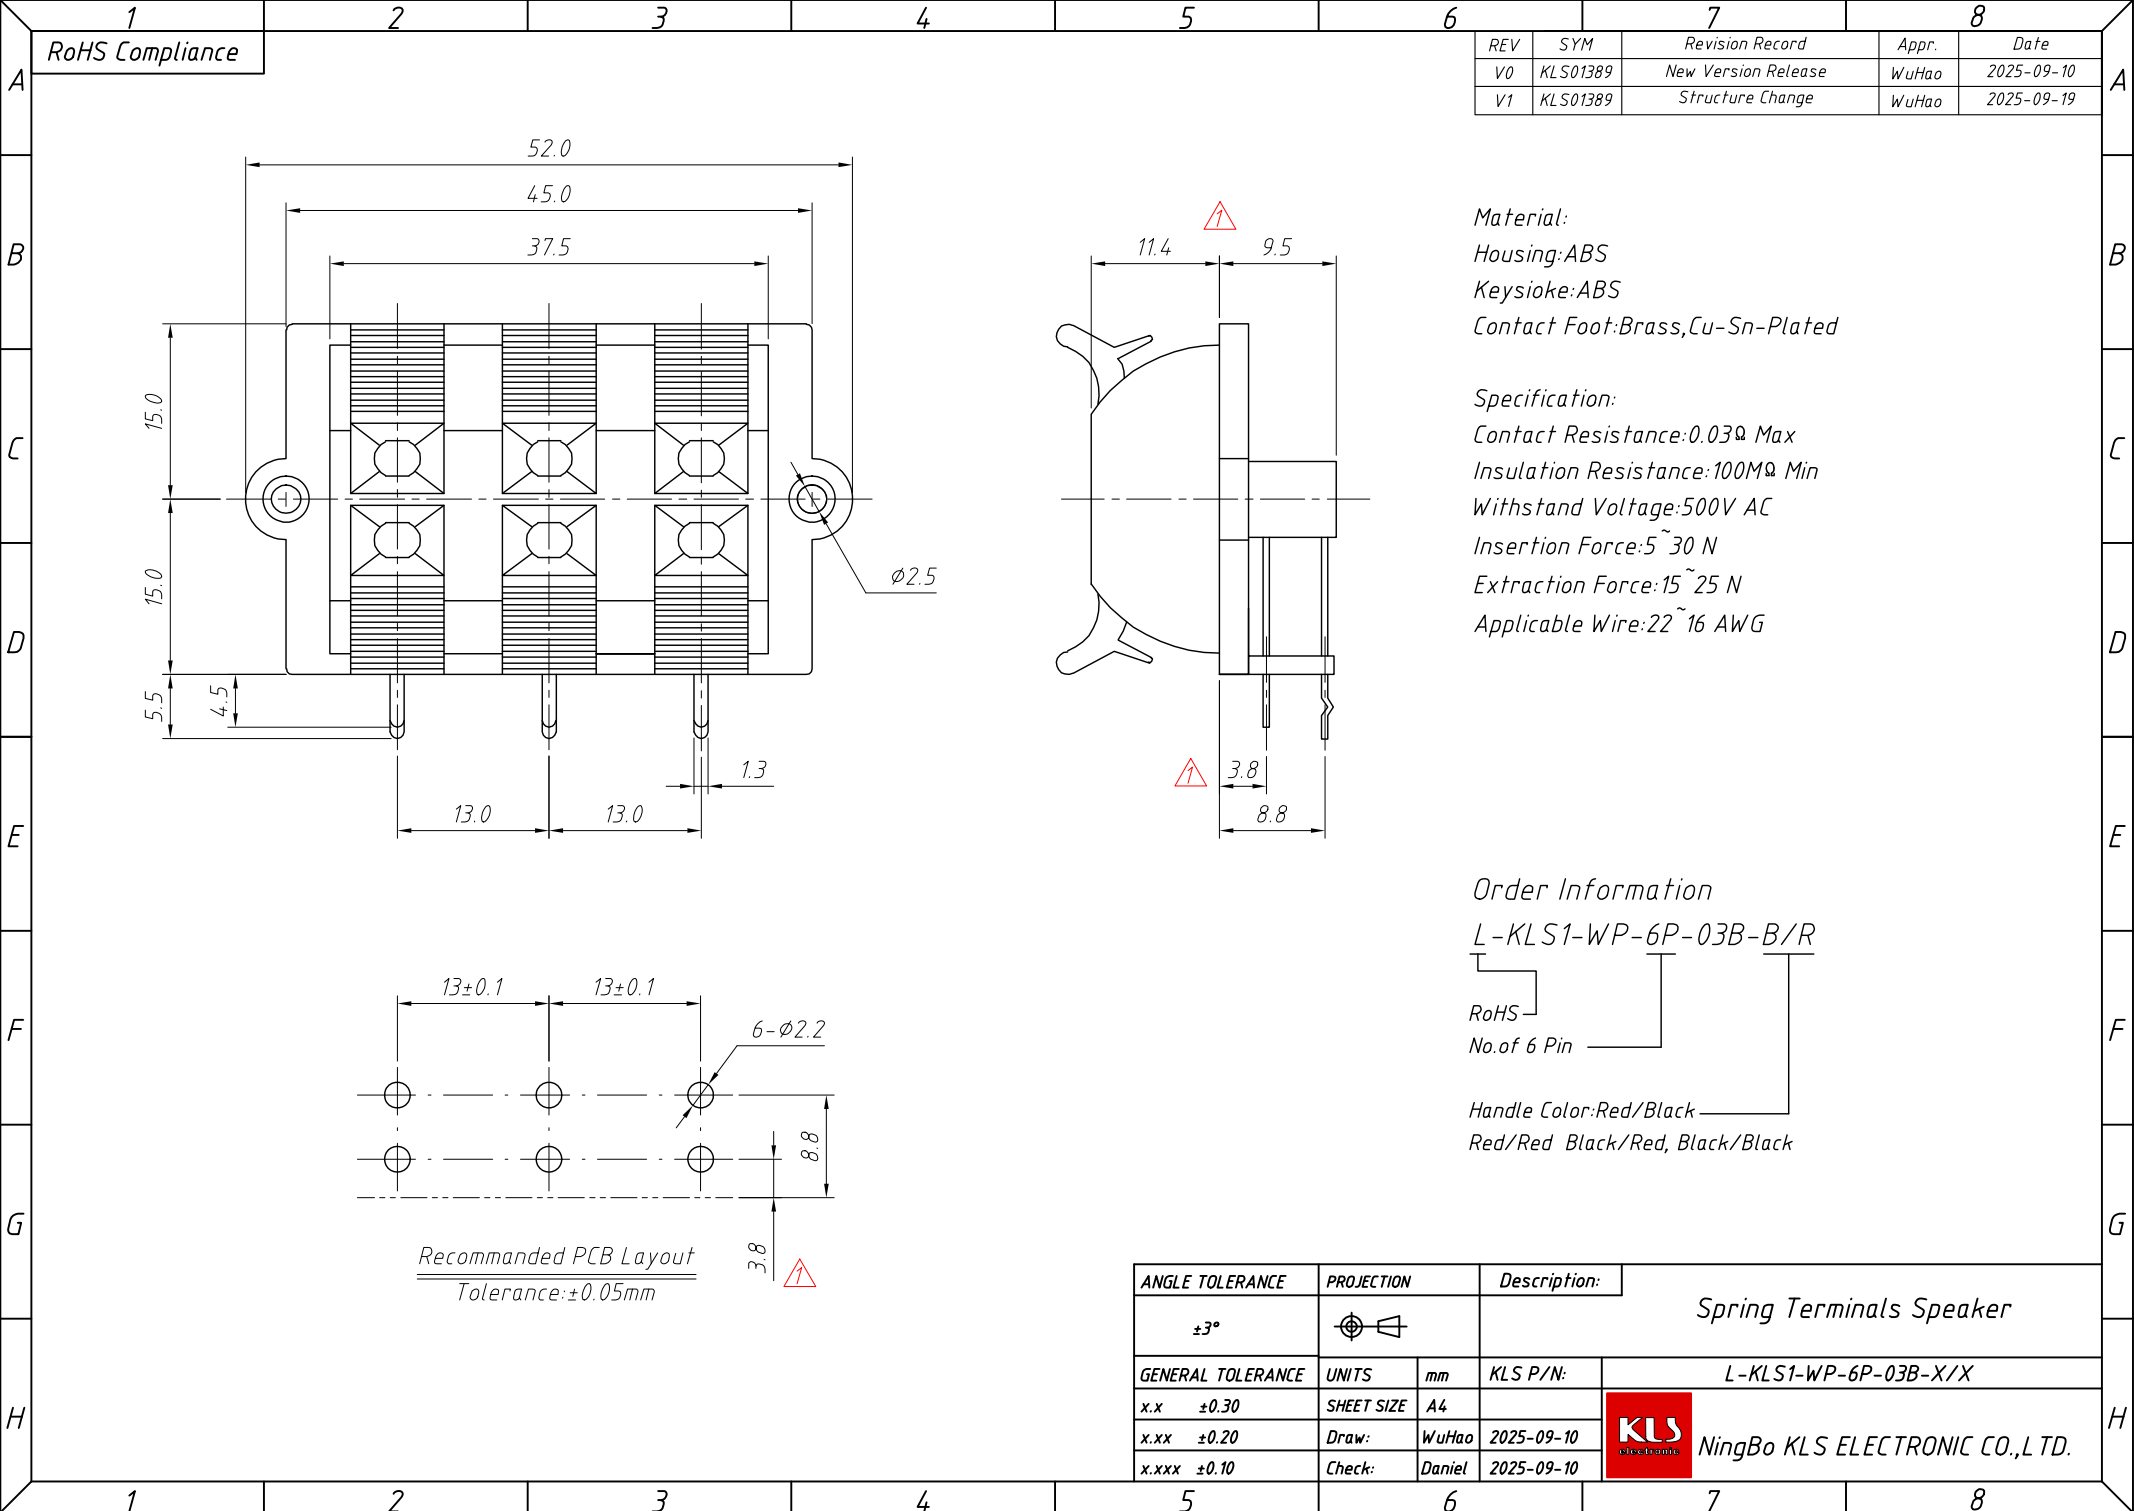

RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS01389	New Version Release	WuHao	2025-09-10
V1	KLS01389	Structure Change	WuHao	2025-09-19

Material:
Housing:ABS
Keysioke:ABS
Contact Foot:Brass,Cu-Sn-Plated

Specification:
Contact Resistance:0.03Ω Max
Insulation Resistance:100MΩ Min
Withstand Voltage:500V AC
Insertion Force:5~30 N
Extraction Force:15~25 N
Applicable Wire:22~16 AWG

Order Information
L-KLS1-WP-6P-03B-B/R
RoHS
No.of 6 Pin
Handle Color:Red/Black
Red/Red Black/Red, Black/Black

Recommanded PCB Layout
Tolerance:±0.05mm

ANGLE TOLERANCE	PROJECTION	Description:
±3°		Spring Terminals Speaker
GENERAL TOLERANCE	UNITS	mm
x.x ±0.30	SHEET SIZE	A4
x.xx ±0.20	Draw:	WuHao 2025-09-10
x.xxx ±0.10	Check:	Daniel 2025-09-10

NingBo KLS ELECTRONIC CO.,LTD.