


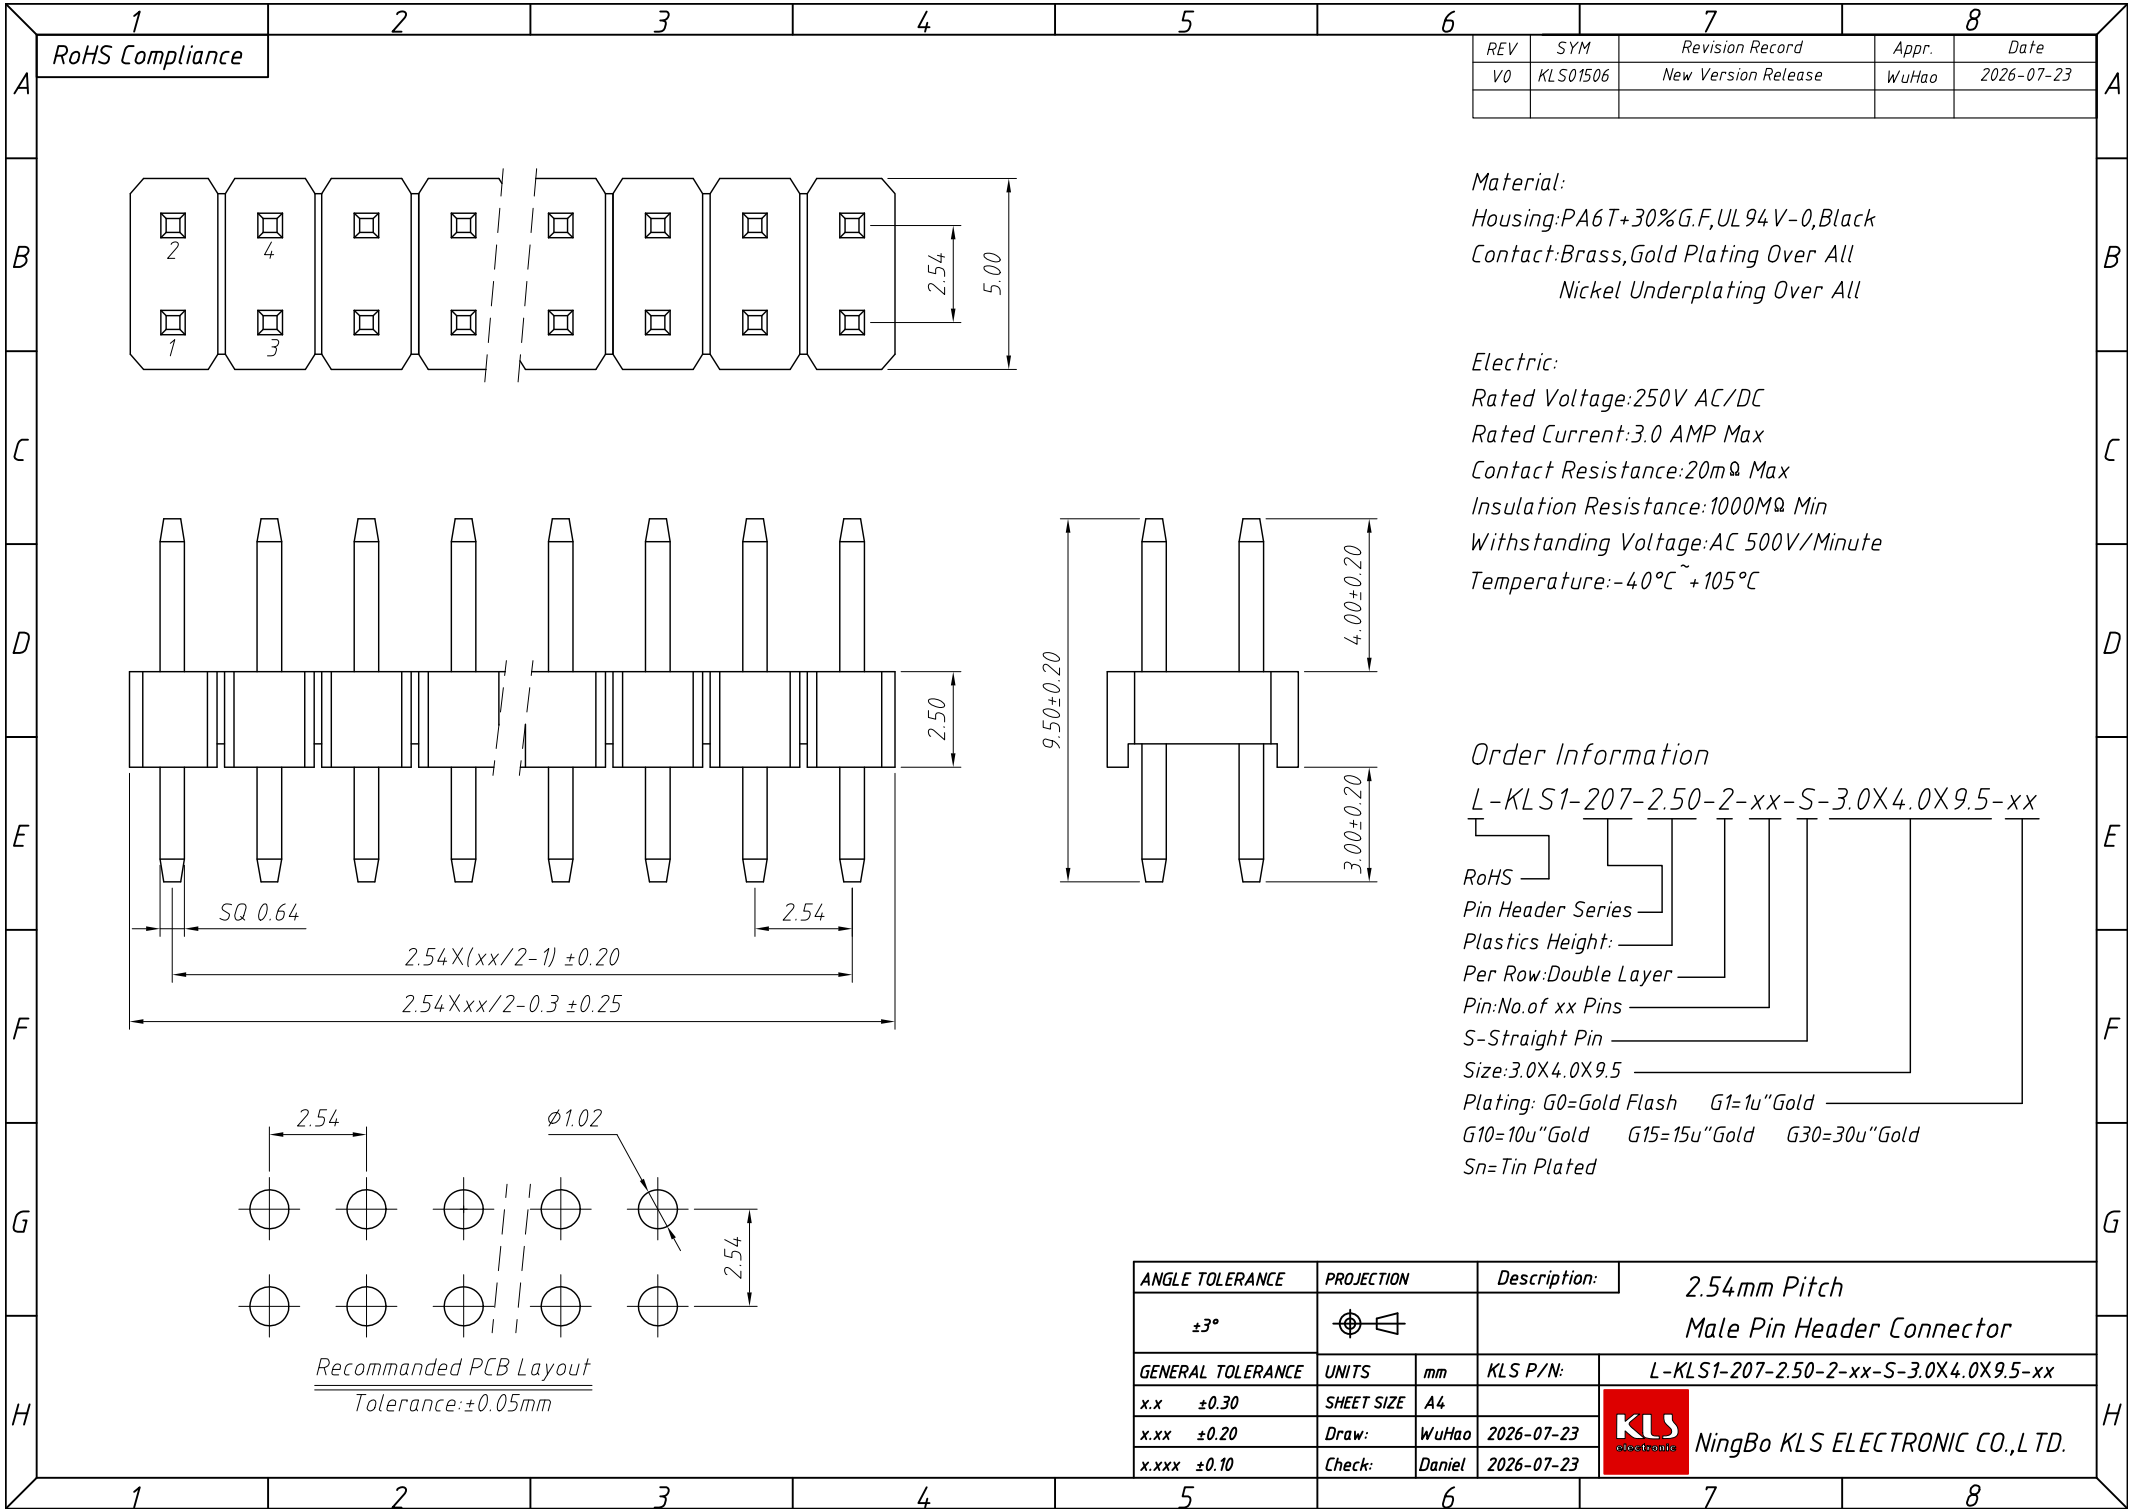

1
RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS01506	New Version Release	WuHao	2026-07-23

Material:
Housing:PA6T+30%G.F,UL 94 V-0,Black
Contact:Brass,Gold Plating Over All
Nickel Underplating Over All

Electric:
Rated Voltage:250V AC/DC
Rated Current:3.0 AMP Max
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Withstanding Voltage:AC 500V/Minute
Temperature:-40°C ~ +105°C

Order Information
L-KLS1-207-2.50-2-xx-S-3.0X4.0X9.5-xx
RoHS
Pin Header Series
Plastics Height:
Per Row:Double Layer
Pin:No.of xx Pins
S-Straight Pin
Size:3.0X4.0X9.5
Plating: G0=Gold Flash G1=1u"Gold
G10=10u"Gold G15=15u"Gold G30=30u"Gold
Sn= Tin Plated

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				2.54mm Pitch Male Pin Header Connector	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	
x.x	±0.30	SHEET SIZE	A4	L-KLS1-207-2.50-2-xx-S-3.0X4.0X9.5-xx	
x.xx	±0.20	Draw:	WuHao	2026-07-23	NingBo KLS ELECTRONIC CO.,L TD.
x.xxx	±0.10	Check:	Daniel	2026-07-23	