
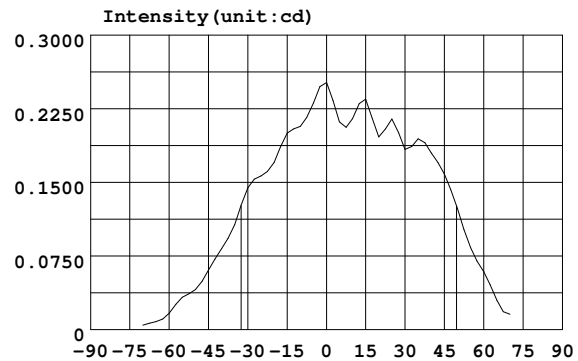


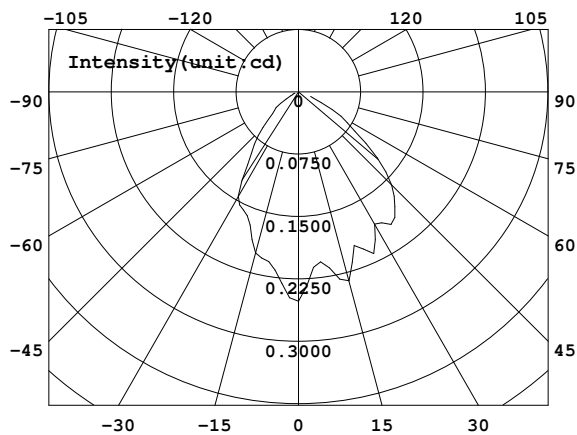

Intensity data:(deg , cd) C0-180

SPEED:High Test Interval:5.0 deg

A	I	A	I	A	I	A	I	A	I	A	I
-70.0	0.0047	-45.0	0.0607	-20.0	0.1705	5.0	0.2116	30.0	0.1838	55.0	0.0835
-65.0	0.0083	-40.0	0.0826	-15.0	0.2004	10.0	0.2150	35.0	0.1944	60.0	0.0591
-60.0	0.0170	-35.0	0.1071	-10.0	0.2073	15.0	0.2350	40.0	0.1802	65.0	0.0301
-55.0	0.0331	-30.0	0.1448	-5.0	0.2311	20.0	0.1965	45.0	0.1587	70.0	0.0159
-50.0	0.0408	-25.0	0.1568	0.0	0.2519	25.0	0.2147	50.0	0.1235		

Electricity Parameter:

Current If: 40.00mA Voltage Vf: 5.800V

Power P: 232.0mW

Optical Parameter(CIE A):

Luminous flux: 0.4130 lm Eff=1.780 lm/W Define: Center

Diffuse angle(deg): @(25%): 103.5 @(50%): 82.3 @(75%): 55.0 @(50%): 82.3

Imax = 0.2519 cd (C=0.0deg,G=0.0deg)C0/180:82.3deg,

C0-180Plane Imax = 0.2519 cd (G=0.0deg) Io = 0.2519 cd @(50%):82.3 Deg

Model:GNL-20003UGC
Tester:LedLamps.ru
Temperature:25.3deg
Manufactory:G-nor

Number:1
Test Date:2013-10-21
Humidity:65.0% V1.00.111
Remarks:EVERFINE(LED626)