


GNL-1880xx (7.62x7.62)

PIRANHA TYPE

Flux LED Lamp

ABSOLUTE MAXIMUM RATING:(Ta=25℃)

Parameter			Unit
DC Forward Current	40		mA
Reverse Voltage	5		V
Reverse Current (Vr=5V)	10		μA
Peak Forward Current ,tw ,=1 msec Duty ,=1/20	180		mA
Operation Temperature	-40	+80	℃
Storage Temperature	-40	+100	℃
Solder Dip (5 seconds,1.6mm from body) Temperature	300	±5	℃

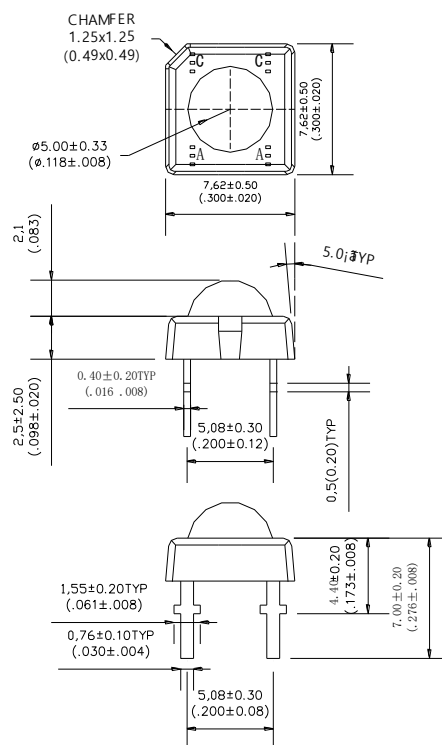

Part Number	EMITTED COLOR		Lens Color	Peak Wavelength (nm)	Vf (v) Typ.	IV (If=20mA) mcd		View Angle 2 θ 1/2
						Min.	Typ.	
GNL-1880UEC	AlGaInP	Orange Red	Water Clear	625	2.0	350	450	70°
GNL-1880URC	GaAlAs	Pure Red	Water Clear	660	1.9	250	350	70°
GNL-1880UYC	AlGaInP	Yellow	Water Clear	590	2.0	350	450	70°
GNL-1880UEC-TL	AlGaInP	Orange Red	Water Clear	625	2.0	800	1000	70°
GNL-1880UYC-TL	AlGaInP	Yellow	Water Clear	590	2.0	1100	1300	70°
GNL-1880UYOC-TL	AlGaInP	Amber	Water Clear	610	2.0	1100	1300	70°
GNL-1880UBC	InGaN	Blue	Water Clear	470	3.5	600	800	70°
GNL-1880BGC	InGaN	Cyan	Water Clear	505	3.5	700	900	70°
GNL-1880PGC	InGaN	Pure Green	Water Clear	525	3.5	1400	1800	70°
GNL-1880UBC-TL	InGaN	Blue	Water Clear	470	3.5	800	900	70°
GNL-1880BGC-TL	InGaN	Cyan	Water Clear	505	3.5	900	1100	70°
GNL-1880PGC-TL	InGaN	Pure Green	Water Clear	525	3.5	3000	4000	70°
GNL-1880UWC	InGaN	Ultra White	Water Clear	5500K-7000K	3.5	800	1200	70°
GNL-1880UWC-15C	InGaN	Ultra White	Water Clear	5500K-7000K	3.5	1700	1900	70°
GNL-1880UWC-TL-15C	InGaN	Ultra White	Water Clear	5500K-7000K	3.5	4000	5000	90°