


DATASHEET

	FILE NO.	NO:
P/N	<u>L-KLS6-07D431K</u>	PAGE: PAGE 1 OF 1
		DATE: 2017-01-18

1. APPEARANCE

1.1	APPEARANCE	Appearance good, no damage, mark clear and complete
1.2	SIZE	SIZE (mm)

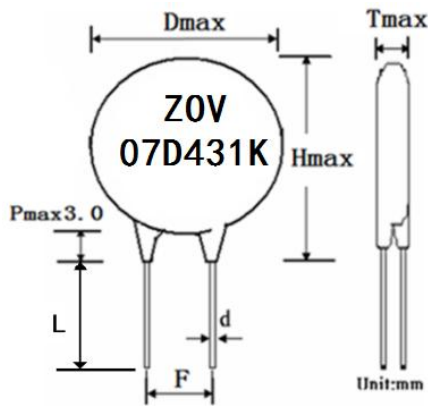

Dmax	9
Hmax	12
Tmax	5.2
F	5.0±1.0
d	0.6±0.05
L(Min)	20
Pmax	3
Lead	CP WIRE
Coating material	Blue
Mark	Laser print

2. Electrical specification

2.1	Max. Allow Voltage	AC: 275 (V)	
		DC :350 (V)	
2.2	Varistor Voltage	387~473 (V)	V0.1mA □ V1.0mA ■
2.3	Max. Static Power	0.25 (W)	
2.4	Max. Limit Voltage	IP: 10 (A)	Test Condition 8/20μs
		Vc:745 (V)	
2.5	Imax.	1 Time: 1200 (A)	Test Condition 8/20μs
		2Time : 600 (A)	
2.6	Max. Energy Tolerance	115(J)	Test Condition 10/1000μs
2.7	Static Reference Capacitance	110(PF)	@1KHz
2.8	Leak Current	≅ 20(μA)	@80%*V1mA
2.9	Biggest Rate after Impact	≅±10%(V1mA)	Test Condition 8/20μs
2.10	Working Temperature	-40℃ ~ +85℃	-40℃ ~ +85℃
2.11	Storage Temperature	-40℃ ~ +125℃	-40℃ ~ +125℃