


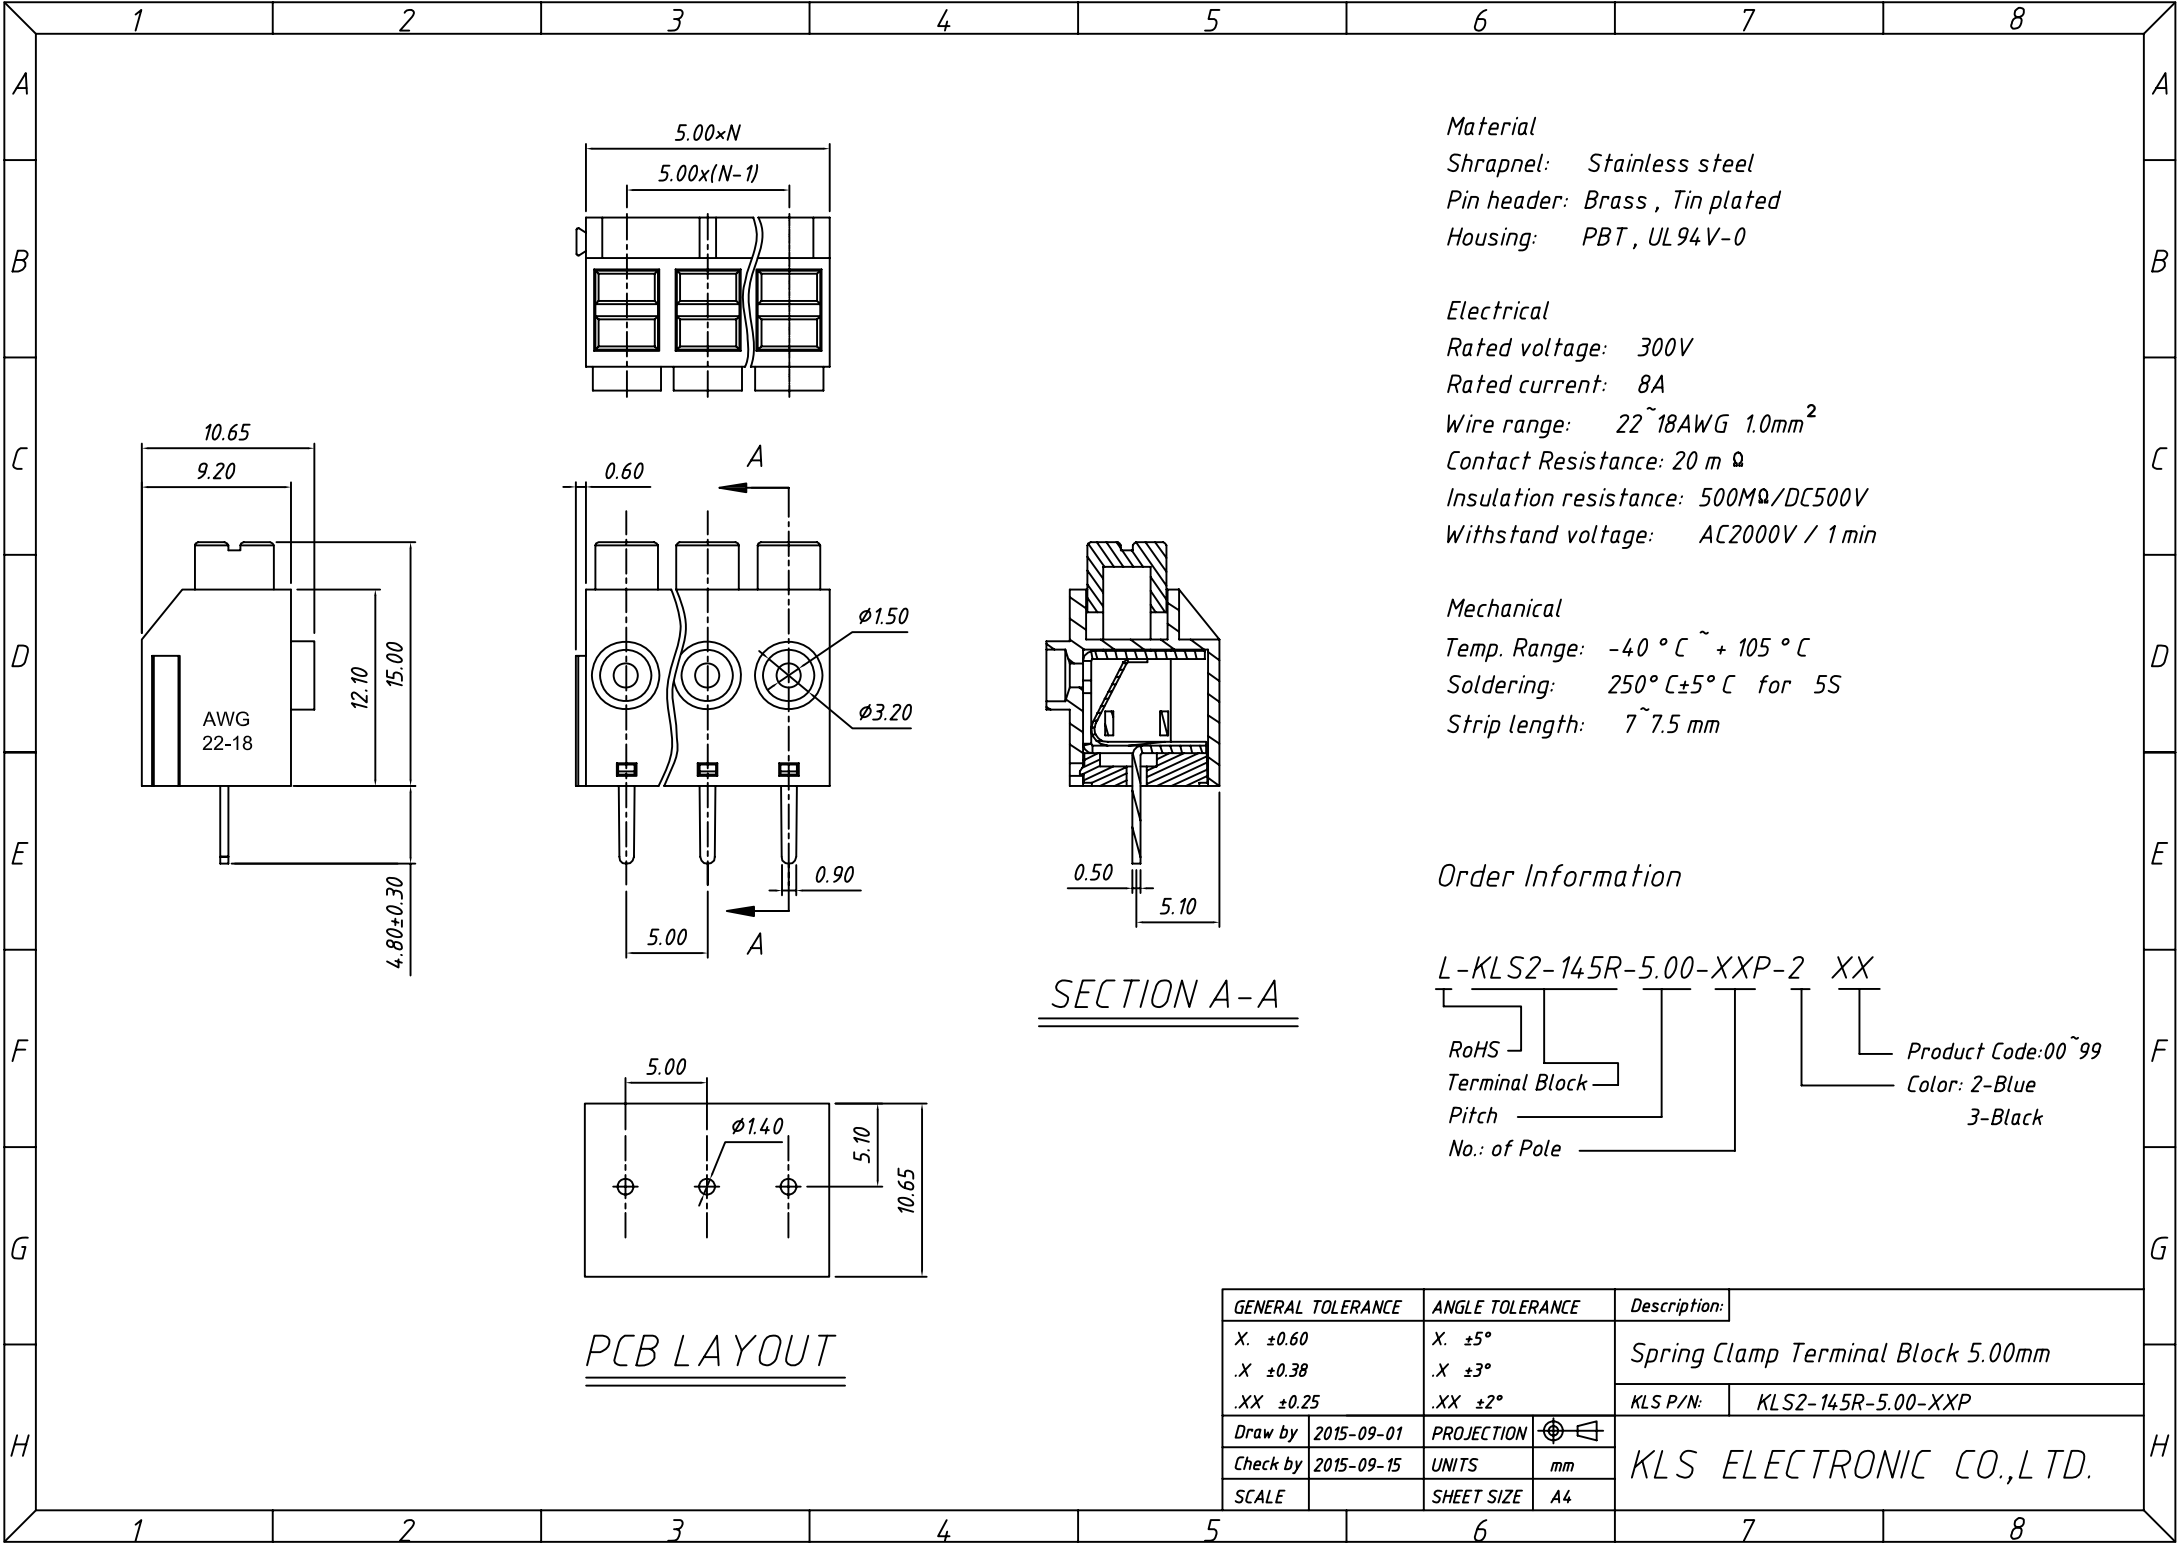

Material
Shrapnel: Stainless steel
Pin header: Brass , Tin plated
Housing: PBT , UL94V-0

Electrical
Rated voltage: 300V
Rated current: 8A
Wire range: 22~18AWG 1.0mm²
Contact Resistance: 20 mΩ
Insulation resistance: 500MΩ/DC500V
Withstand voltage: AC2000V / 1 min

Mechanical
Temp. Range: -40 °C ~ +105 °C
Soldering: 250 °C±5 °C for 5S
Strip length: 7~7.5 mm

Order Information

L-KLS2-145R-5.00-XXP-2 XX
RoHS
Terminal Block
Pitch
No.: of Pole
Product Code:00~99
Color: 2-Blue
3-Black

SECTION A-A

PCB LAYOUT

GENERAL TOLERANCE		ANGLE TOLERANCE		Description:	
X. ±0.60		X. ±5°		Spring Clamp Terminal Block 5.00mm	
.X ±0.38		.X ±3°			
.XX ±0.25		.XX ±2°			
Draw by	2015-09-01	PROJECTION		KLS P/N:	KLS2-145R-5.00-XXP
Check by	2015-09-15	UNITS	mm	KLS ELECTRONIC CO.,LTD.	
SCALE		SHEET SIZE	A4		