
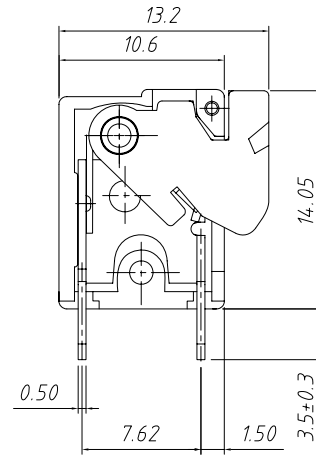


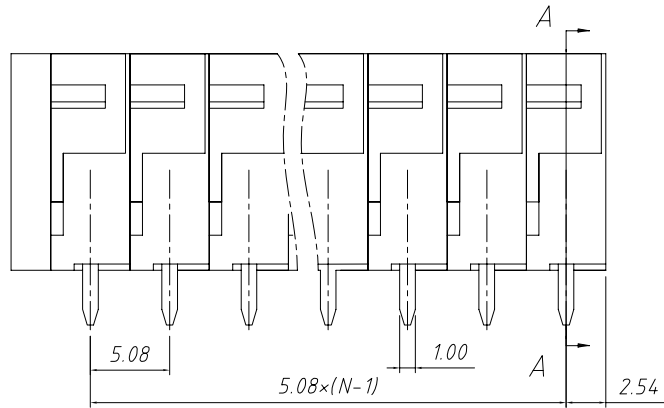

SECTION A-A

Material

Shrapnel: Stainless steel

Pin header: Brass, Tin plated

Housing: PA66, UL94V-0

Electrical

Rated voltage: 300V

Rated current: 10A

Wire range: 22~16AWG 1.5mm²

Contact Resistance: 20 mΩ

Insulation resistance: 500MΩ/DC500V

Withstand voltage: AC2000V / 1 min

Mechanical




Temp. Range: -40 °C ~ +105 °C

Soldering: 250 °C ±5 °C for 5S

Strip length: 9~10 mm

Order Information

L-KLS2-142V-5.08-XXP-4 XX

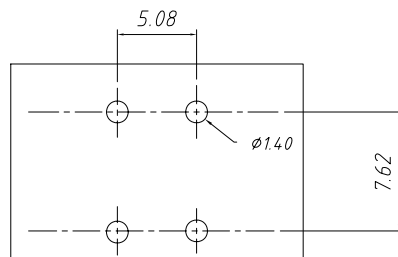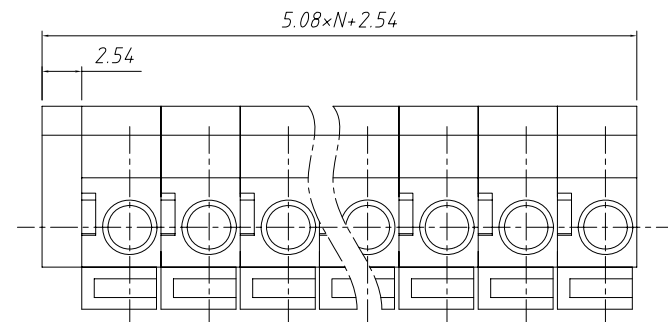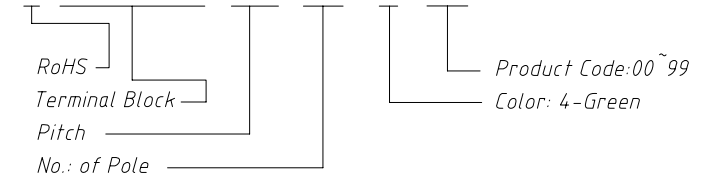

PCB LAYOUT

GENERAL TOLERANCE			ANGLE TOLERANCE			PROJECTION		Description:
X. ±0.60			X. ±5°			UNITS	mm	Spring Clamp Terminal Block 5.08mm
.X ±0.38			.X ±3°			SHEET SIZE	A4	
.XX ±0.25			.XX ±2°				KLS P/N:	
Draw by: Date		2015-09-01					KLS ELECTRONIC CO., LTD.	
Check by: Date		2015-09-15						
SCALE			SHEET		OF			