



Technical Data Sheet

4.6 mm Round LED (T-1)

6324-15UTC/S400-X9

Features

- Popular T-1 colorless 5mm package.
- High luminous power.
- Typical chromaticity coordinates $x=0.29$, $y=0.28$ according to CIE1931.
- Bulk, available taped on reel.
- Pb free .

Descriptions

- The series is designed for application required high luminous intensity.
- The phosphor filled in the reflector converts the blue emission of InGaN chip to ideal white.


Applications

- Outdoor Displays
- Optical Indicators
- Backlighting
- Marker Lights

Device Selection Guide

PART NO.	Chip		Lens Color
	Material	Emitted Color	
6324-15UTC/S400-X9	InGaN/Sapphire	White	Water Clear

Package Dimensions

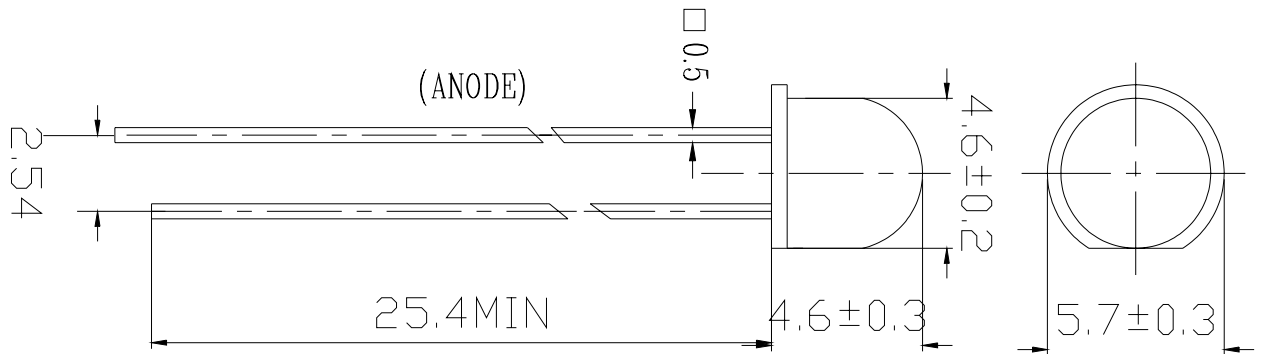

Notes:

- 1.All dimensions are in millimeters, and tolerance is 0.25mm except being specified.
- 2.Lead spacing is measured where the lead emerges from the package.
- 3.Protruded resin under flange is 1.5mm Max. LED.

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Continuous Forward Current	I _F	25	mA
Reverse Voltage	V _R	5	V
Operating Temperature	T _{opr}	-30 ~ +85	°C
Storage Temperature	T _{stg}	-40 ~ +100	°C
Soldering Temperature (T=5 sec)	T _{sol}	260 ± 5	°C
Power Dissipation	P _d	120	mW
Electrostatic Discharge	ESD	150	V

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Units
Forward Voltage	V _F	I _F =20mA	--	3.5	4.0	V
Reverse Current	I _R	V _R =5V	--	--	50	uA
Luminous Intensity	I _V	I _F =20mA	400	800	--	mcd
Viewing Angle	2 θ 1/2	I _F =20mA	--	60	--	deg
Chromaticity Coordinates	x	I _F =20mA	--	0.29	--	
	y	-----	--	0.28	--	

Luminous Intensity Combination (mcd at 20mA)

I _V Ranks	U	V	W	X
Min.	400	600	900	1350
Max.	600	900	1350	2025


Measurement Uncertainty of Luminous Intensity: ±15%

Forward Voltage Combination (V at 20mA)

V _F Rank	1	2	3	4	5	6
Min.	2.8	3.0	3.2	3.4	3.6	3.8
Max.	3.0	3.2	3.4	3.6	3.8	4.0

*Measurement Uncertainty of Forward Voltage : ±0.1V

CIE Chromaticity Diagram

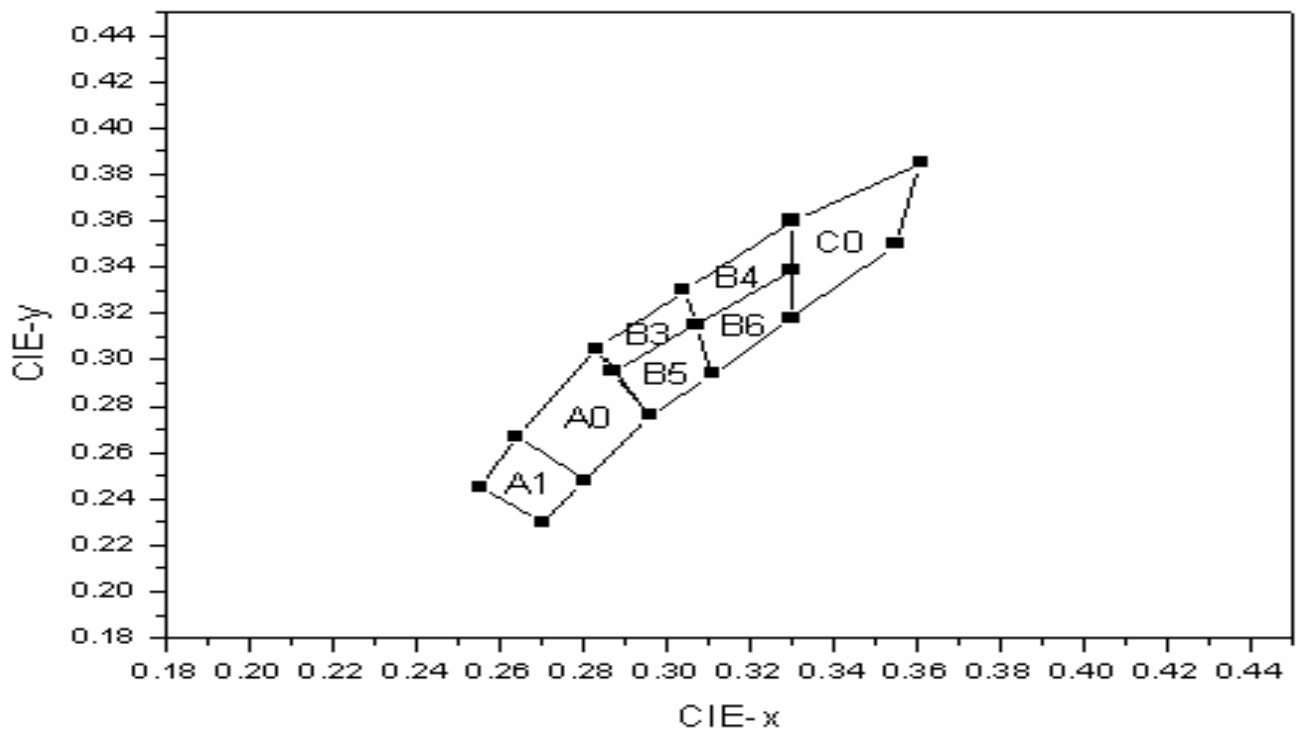

6324-15UTC/S400-X9


Color Ranks (IF=20mA , Ta=25°C)

Color Ranks			CIE			
A1	A1-1	X	0.255	0.2595	0.275	0.27
		Y	0.245	0.256	0.239	0.230
	A1-2	X	0.2595	0.264	0.280	0.275
		Y	0.256	0.267	0.248	0.239
A0	A0-1	X	0.264	0.2735	0.288	0.28
		Y	0.267	0.286	0.262	0.248
	A0-2	X	0.2735	0.283	0.296	0.288
		Y	0.286	0.305	0.276	0.262
B3	B3-1	X	0.283	0.2935	0.297	0.248
		Y	0.305	0.3175	0.305	0.287
	B3-2	X	0.2935	0.304	0.307	0.297
		Y	0.3175	0.33	0.315	0.305
B4	B4-1	X	0.304	0.317	0.3185	0.307
		Y	0.33	0.345	0.327	0.315
	B4-2	X	0.317	0.33	0.33	0.3185
		Y	0.345	0.36	0.339	0.327
B5	B5-1	X	0.287	0.297	0.3035	0.296
		Y	0.295	0.305	0.285	0.276
	B5-2	X	0.297	0.307	0.311	0.3035
		Y	0.305	0.315	0.294	0.285
B6	B6-1	X	0.307	0.3185	0.3205	0.311
		Y	0.315	0.327	0.306	0.294
	B6-2	X	0.3185	0.33	0.33	0.3205
		Y	0.327	0.339	0.318	0.306
C0	C0-1	X	0.33	0.3455	0.3425	0.33
		Y	0.36	0.3725	0.334	0.318
	C0-2	X	0.3455	0.361	0.355	0.3425
		Y	0.3725	0.385	0.35	0.334


Measurement uncertainty of the color coordinates : ± 0.01

Typical Electro-Optical Characteristics Curves


Relative Intensity vs. Wavelength

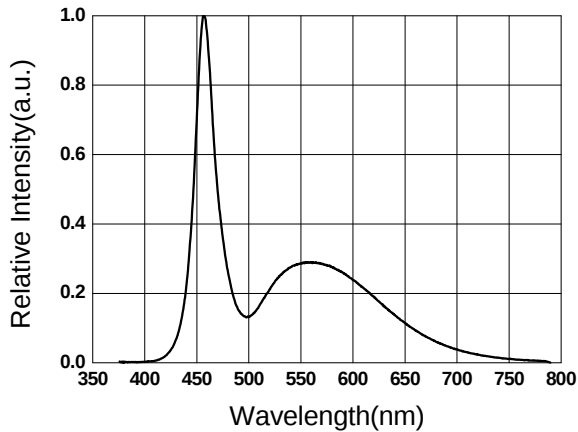


Forward Current vs. Forward Voltage

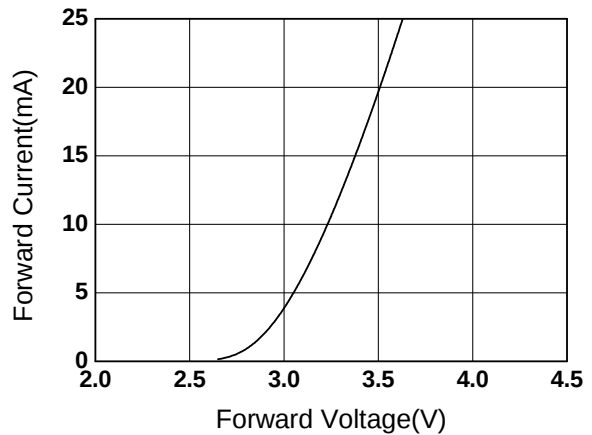


Relative Intensity vs. Forward Current

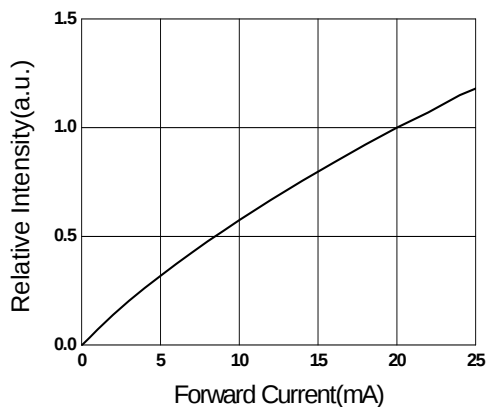


Forward Current vs. Ambient Temp.

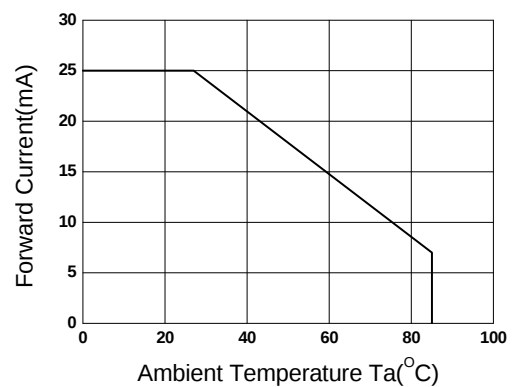

Chromaticity Coordinate vs. Forward Current

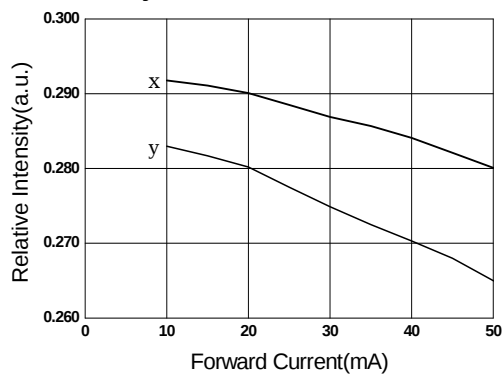

Relative Intensity vs. Angle Displacement

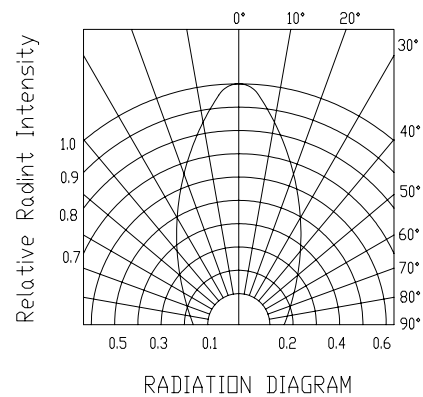

Label Form Specification

	
CPN:	
P/N:	
	
6324-15UTC/S400-X9	
QTY :	CAT:
	HUE:
LOT NO :	REF:
	
MADE IN TAIWAN	

CPN: Customer's Production Number
P/N : Production Number
QTY: Packing Quantity
CAT: IV&VF Rank
HUE: Color Rank
REF: Reference
LOT No: Lot Number
MADE IN TAIWAN: Production Place

Notes

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.
4. When the LED is connected using serial circuit, if either piece of LED is no light up but current can't flow through causing others to light down. In new design, the LED is parallel with zener diode. if either piece of LED is no light up but current can flow through causing others to light up