
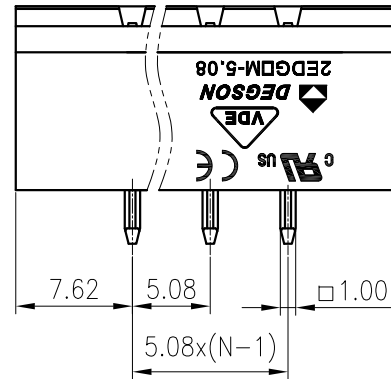
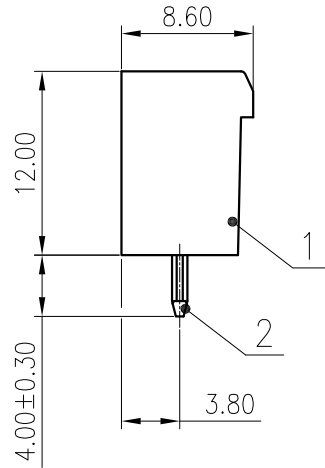
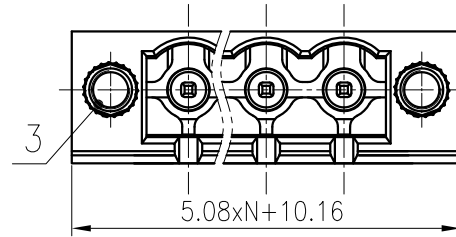


PCB LAYOUT

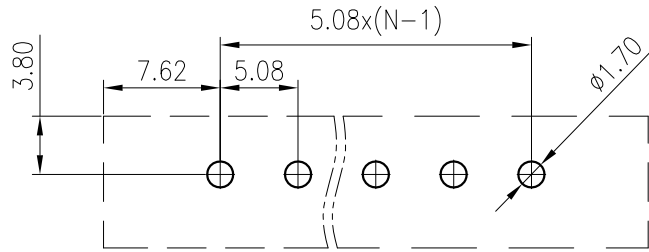

未注公差/General tolerances(mm)													0.1/10	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400		
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500		
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'

3	Nut	Copper alloy	/
2	Pin	Copper	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
额定电压/电流/Rated Voltage(V)/Current(A)		300/15	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2
额定电压/电流/Rated Voltage(V)/Current(A)		/	320/20
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		/	4
线数范围/Poles		N=02~22P	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	

MATERIAL:		SURFACE:			
MAT NO.: /		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
STATUS: /					
APPD: Lan ChH 2020.05.21					
CHKD: /		NAME: 2EDGVM-5.08-XXP-1Y-100A(H)			
DRFT: LuZhH 2019.07.01		DRAWING NO.: 2EDGVM-5.08-C04		REV	T1
	SIZE: A4		TYPE: CUSTOMER DRAWING	SCALE: 2:1	SHEET 1/1

文 管 中 心
研 发 专 用

2020. 05. 21

(仅限内部使用, 对外无效)

REV	ECN	DESCRIPTION	DRFT	DATE