

TERMINAL BLOCK Connector

Barrier Terminal Blocks


KLS2-55C-10.0 Series Pitch=10.0mm

Electrical

Voltage rating : 300V
Current rating : 30A
Wire range : 14-22AWG
Operation temperature : -40°C to +105°C
Torque : 4kg/cm
Insulation Resistance: 1000MΩ/DC500V
Withstanding Voltage: AC2000V/Min

MATERIAL

Housing : PA 66 UL94V-0
Terminal : Brass 0.8t Tin plated
Screws : M4 Steel Nickel Plated

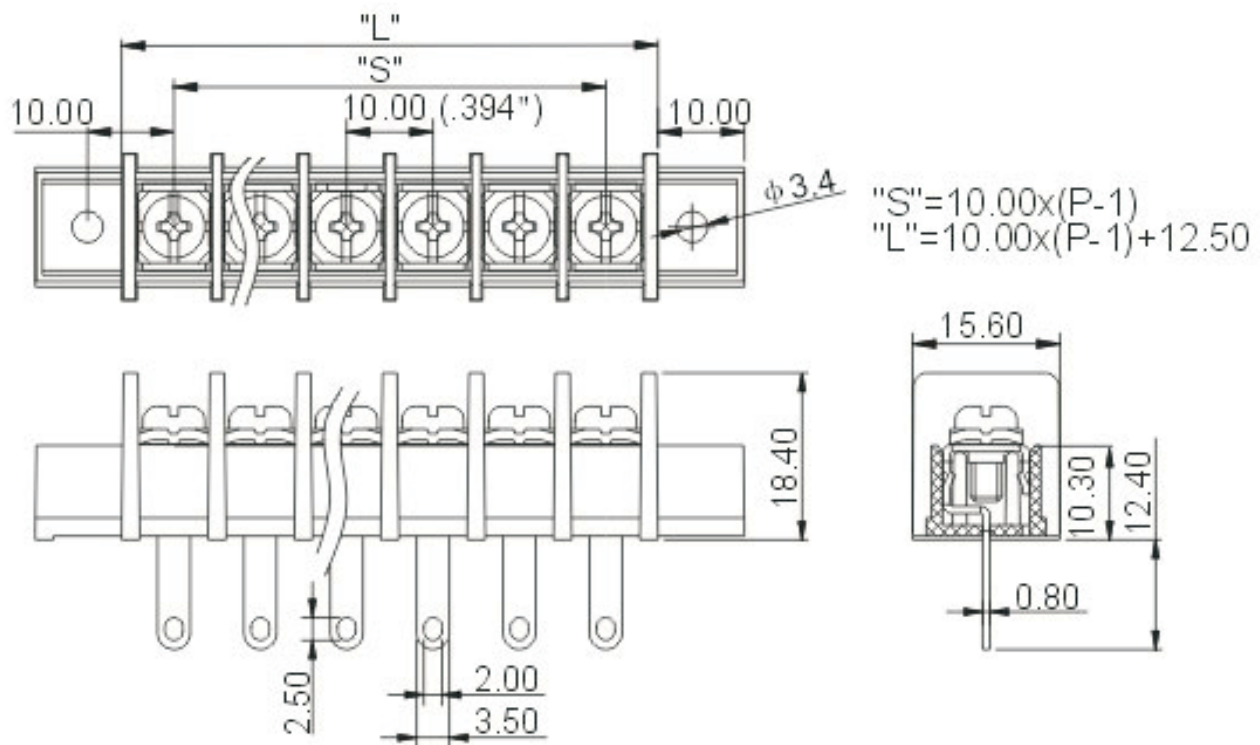

ORDER INFORMATION

Product NO.: KLS2-55C-10.0-X-X

Pos. NO. _____
Barrier Terminal Block _____
Pitch: 10.0=10.0mm _____
C: With cover
D: Without cover
A=Mount Ends
B=Barrier Ends