Specification							
Model: M9D3TB							
Description:							
3pcs 2835 SMD LEDs, 69*19*7.5, white housing, equipped with optical							
device, PVC injection series, bat wing light distribution, 12Vdc, constant current, LED module							
Prepared by :							
Frepared by :							
Checked by :							
Standard Dept :							
Approved by :							

□Draft

**■**Published

Issued Status:

# **Specification**

Product Name: LED module

Model: M9D3TB

#### **Applications**

Suitable for  $8\sim20$ cm [3.14 $\sim$ 7.87in] depth signage.

#### **Features**

- 1. 2835 SMD LED with low attenuation and long life;
- 2. Standard cascading qty up to 50pcs;
- 3. Beam angle: 160°;
- 4. Can be cut between every unit;
- 5. CE,RoHS,UL compliant.

#### Installation

Via back adhesive for preliminary fixing, screws for permanent fixing.

#### Warranty

5 years or 22,000 hours, whichever comes first.



P/N	LED Color	Color Temperature (K)	Color Tolerance Adjustment (SDCM)	Beam Angle (°)	Luminous Flux (Im/piece)	CRI Ra	Luminous Efficacy (lm/W)	Working Voltage (V DC)	Working Current (mA/piece)	Power (W/piece)
M9D3TB	Pure White	6000	-	160	150	≥70	92.6	12	135	1.62

#### Others:


P/N	LED	Standard	M	Single module		Operating		Storage			
	Color	cascading	casca	weight		Temperature		Temperature		IP	
		qty	Single-ended	Double-ended	(g)	(lb)	(℃)	(°F)	(℃)	(°F)	Grade
		(pcs)	(pcs)	(pcs)							
M9D3TB	Pure	50	/	50	14	0.030	-25~+	-13~+	-25~+	-13~+	IP65
	White						60	140	70	158	


#### Notes:

- ① Testing environment temperature:  $25\pm2^{\circ}$ [77 $\pm3.6^{\circ}$ F].
- ② The actual data of each single product may differ from above typical data which are subject to change without prior notice.
- ③ "-" in the above is SDCM parameters which are not required temporarily.
- 4 The "CRI" is actual dataofproduct.


### **Profile Drawings:**

Unit: mm [in]

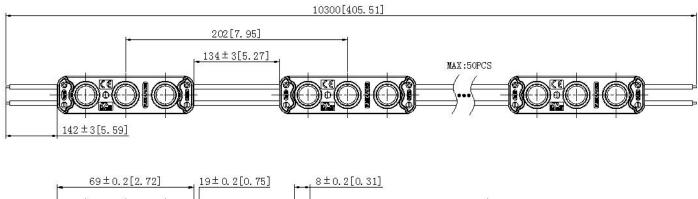




# **Light Distribution:**

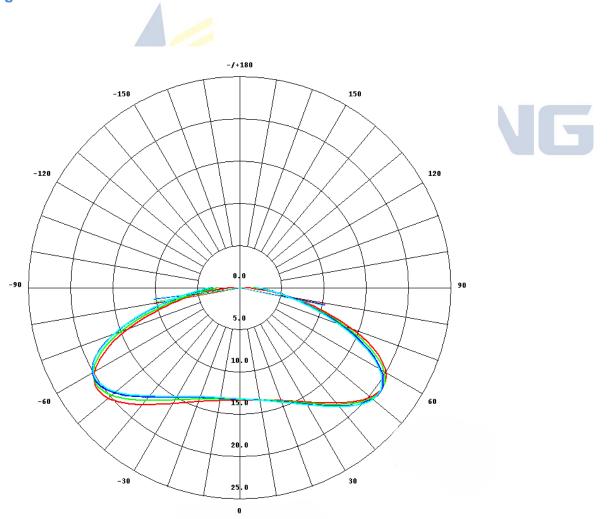

#### **Packaging Diagrams:**

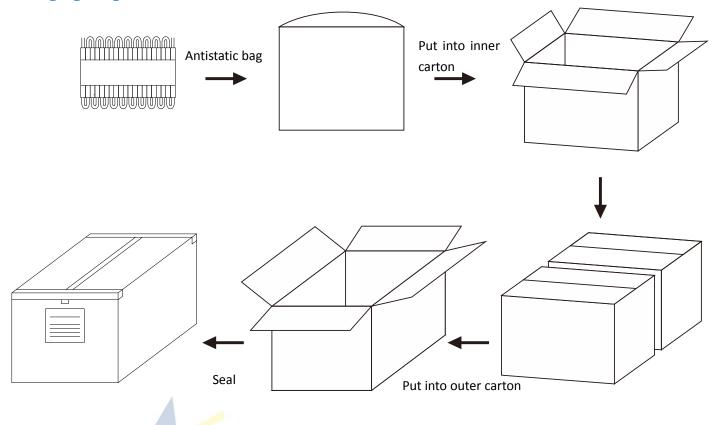

## **Packaging Information:**

# RISHANG

- 1. Outer Carton: 52.8\*37.6\*27.2cm =  $0.0539 (1\pm10\%)$  CBM [20.78\*14.80\*10.70in];
- 2. 100pcs modules per antistatic bag, 4 bags per inner carton, 2pcs inner cartons per outer carton, 800pcs modules in total;
- 3. Net Weight (N.W): 11.2 (1±10%) kg[24.69 (1±10%) lb];
- 4. Gross Weight (G.W): 12.9 (1±10%) kg[28.43 (1±10%) lb];
- 5. The actual packed quantity and weight may subject to change without prior notice.