
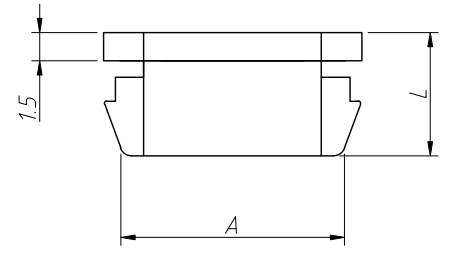
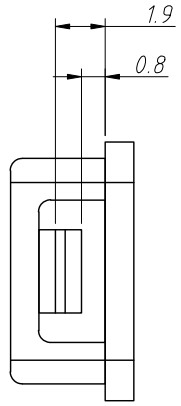


1
RoHS Compliance

6		7		8	
REV	SYM	Revision Record		Appr.	Date
V0	KLS08011	New Version Release		Song	2024-05-11

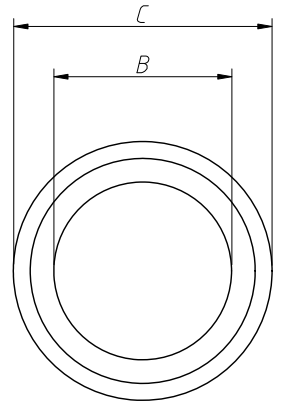

- Notes:
1. Material: PA66, UL 94V-2, Black
 2. Operating Temperature: 0°C ~ +80°C
 3. The Appearance Shall Be Free Of Defects Such As Burrs, Shrinkage, Etc
 4. This Product Does Not Contain Lead (Pb), Mercury (Hg), Pot (Cd), Hexavalent Inscription (Cr VI)
 5. The Material Used In This Product Has A Water Absorption Of 2.5% After 24 Hours Immersion At A Temperature Of 23 °C And A Relative Humidity Of 50%
 6. Boil water at 100°C ~ 110°C for 10 minutes
 7. Withstand Voltage: 2500V/0.5mA/1m
 8. Heat Resistance: B-130°C (30m without melting at 200 °C)
- Applicable Plate Thickness: 1.4mm ~ 3.2mm

Item No:	A (Mounting Hole)	B(Wire Diameter Max)	C(Covering outer diameter)	L Height
L-KLS8-0508-SB-8S	7.8	6.8	9.8	6.0
L-KLS8-0508-SB-8	7.8	5.8	9.4	8.0
L-KLS8-0508-SB-10	9.5	6.3	12.0	10.3
L-KLS8-0508-SB-12S	11.9	9.2	13.7	6.3
L-KLS8-0508-SB-13	12.7	8.0	14.2	10.3
L-KLS8-0508-SB-16	15.9	12.7	18.6	10.3
L-KLS8-0508-SB-19	19.0	14.3	21.7	10.5
L-KLS8-0508-SB-22	22.2	17.5	24.2	11.5
L-KLS8-0508-SB-26	25.5	19.1	28.5	11.5
L-KLS8-0508-SB-30	30.0	24.1	33.3	11.5
L-KLS8-0508-SB-38	38.1	29.0	41.2	11.4
L-KLS8-0508-SB-4A	4.4	3.3	6.5	6.2
L-KLS8-0508-SB-45	43.6	35.4	47.8	11.6

Unmarked	0 ~ 4	4 ~ 15	15 ~ 30	30 ~ 50	50 ~ 100	100 ~
Tolerance	±0.15	±0.2	±0.3	±0.5	±0.7	±1.0

ANGLE TOLERANCE	PROJECTION		Description:			
±3°			Snap Bushing			
GENERAL TOLERANCE	UNITS	mm	KLS P/N:		L-KLS8-0508-SB-XX	
.x ±0.30	SHEET SIZE	A4			NingBo KLS ELECTRONIC CO.,L TD.	
.xx ±0.20	Draw:	Song	2024-05-11			
.xxx ±0.10	Check:	Daniel	2024-05-11			