

Product Specification

Number: L-KLS3-4010WR/WT
Name: Ceramic Ultrasonic Sensor
Specification: _____
Customer: D02
Date: 2020-04-21

Customer Signature:



NINGBO KLS ELECTRONIC CO; LTD

Tel : 0086-574-86828566

Fax : 0086-574-86824882

ADD : NO. 8-1, RONGXIA RD. XIAPU SHANQIAN
INDUSTRIAL ZONE BEILUN NINGBO ZHEJIANG.

Compile	Check	Review	Approval
Jenny	Jack.C		

Part Name

Ceramic Ultrasonic Sensor


NINGBO KLS ELECTRONIC CO.LTD

1. SCOPE


This specification shall cover the characteristics of the ceramic ultrasonic sensor with 4010WR

4010WR : Transmitter 4010WR : Receiver

2. OUTLINE DIMENSIONS (UNIT: mm)

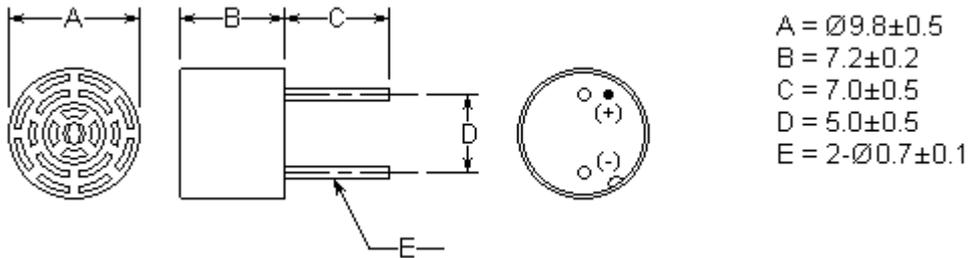

3. TEST CIRCUIT

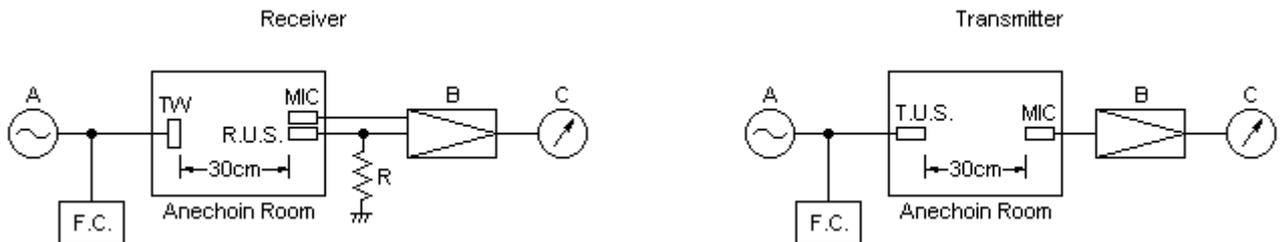

A: Oscillator B: Amplifier C: Voltmeter R: 3.9K MIC: Microphone TW: Tweeter

R.U.S.: Receiver Ultrasonic Sensor T.U.S.: Transmitter Ultrasonic Sensor F.C.: Frequency Counter

4. CHARACTERISTICS

Part number	L-KLS3-4010WT	L-KLS3-4010WR
Construction	Open structure type	Open structure type
Using Method	Transmitter	Receiver
Center frequency	40.0±1.0KHz	40.0±1.0KHz
Sound pressure level	108dB min.	-----
Sensitivity	-----	-68dB min.
Capacitance	2500Pf±20%	2500Pf±20%
Maximum input voltage	40Vp-p	40Vp-p
Directivity	80°±15° (-6dB)	80°±15° (-6dB)
Distance of Detection	0.2~3m (Reflect)	0.2~3m (Reflect)
	8m (Correlation)	8m (Correlation)
Operating temperature	-20°C~+70°C	-20°C~+70°C
Storage Temperature	-40°C~+85°C	-40°C~+85°C

Part Name

Ceramic Ultrasonic Sensor



NINGBO KLS ELECTRONIC CO.LTD

4.1 Frequency:

Transmitting



Receiving

Impedance Magnitude/Phase

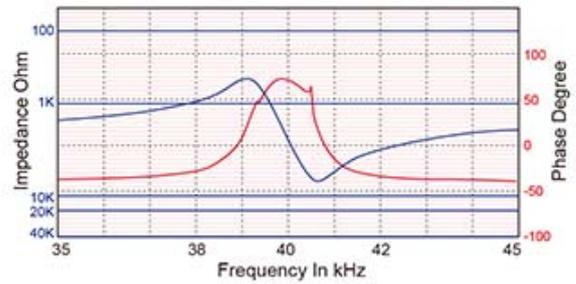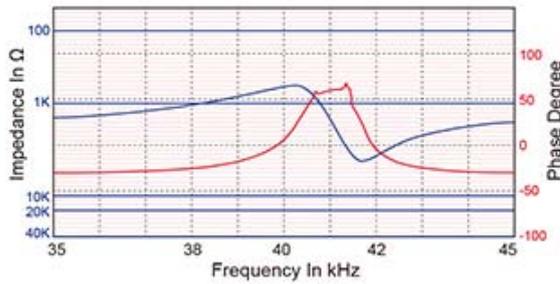


4.2 Sound pressure level & Sensitivity:

Sound Pressure Level & Sensitivity

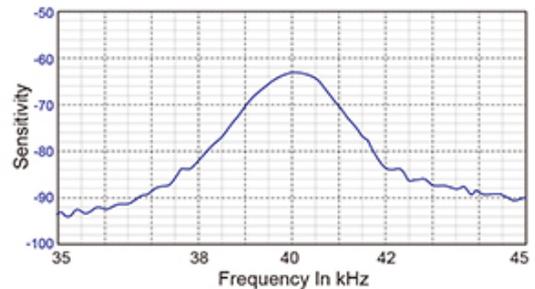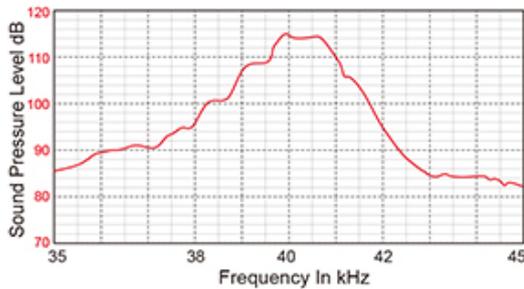

4.3 Directivity:

Directivity

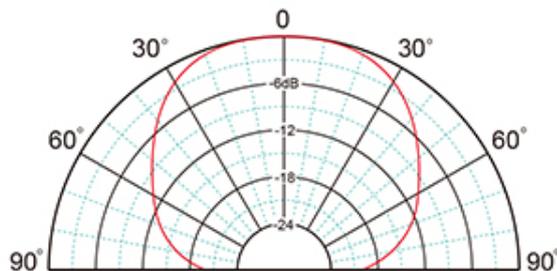

Delivery Specification	No. L-KLS3-4010WR/WT	Page 4/4
Part Name Ceramic Ultrasonic Sensor	NINGBO KLS ELECTRONIC CO.LTD	

5. ENVIRONMENTAL CHARACTERISTICS

5.1 Sound Pressure Level and Sensitivity shall not change by more than 15dB in temperature range of -20°C to 70°C, at a relative humidity of 30%.

5.2 Sound Pressure Level and Sensitivity shall not change by more than 6dB in the humidity of 10% to 90%, At the temperature of 25°.

5.3 MOISTURE

Keep the sensor at 40°C±2°C and 90°C to 95°C R.H for 96±4 hours. Then, release the sensor into the room conditions for 24 hour prior to the measurement. It shall fulfill the specifications in Table 1.

5.4 VIBRATION

Subject the sensor to the vibration for 1 hour each in the X.Y and Z axes with the amplitude of 1.5mm at 10 to 55 Hz. It shall fulfill the specifications in Table 1.

5.5 HIGH TEMPERATURE EXPOSURE

Subject the sensor to 80±5°C for 24±1 hours. then, release the sensor into the room conditions for 1 hour prior to the measurement. It shall meet the specifications in Table 1.

5.6 LOW TEMPERATURE EXPOSURE

Subject the sensor to -30±5°C for 24±1 hours. Then release the sensor into the room conditions for 1 hour prior to the measurement. It shall meet the specifications in Table 1.

TABLE 1

ITEM	SPECIFICATION
Center Frequency	Within 0.5KHz Compared With Initial Values
Sound Pressure Level	Within 3dB Compared With Initial Values
Sensitivity	Within 3dB Compared With Initial Values

※ NOTES

- This sensor is designed for use in air. Do not use this sensor in fluid.
- To prevent sensor malfunctions, operational failure or any deterioration of its characteristics, do not use this sensor in the following, or similar conditions.
 - A. In strong shock or vibration.
 - B. In high temperature and humidity for a long time.
 - C. In corrosive gases or sea breeze.
 - D. In an atmosphere of organic solvents.

In dirty and dusty environments that may contaminate the sensor front.