

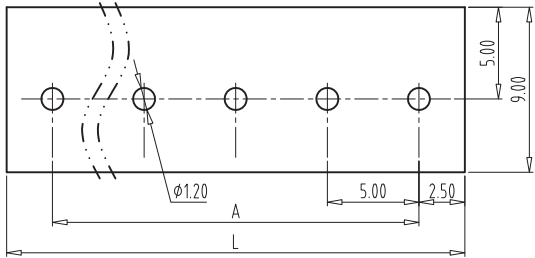
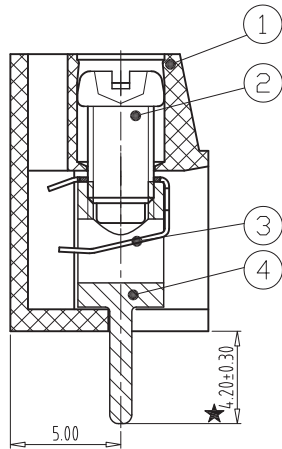




REV	CONTENT	CHK	DATE
V0.0	CONTENT	SK	14.05.27

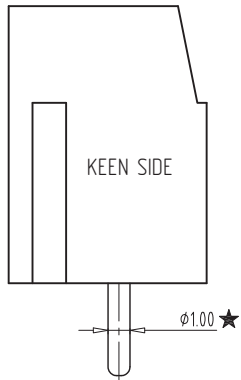

PCB LAYOUT
S=2.5:1

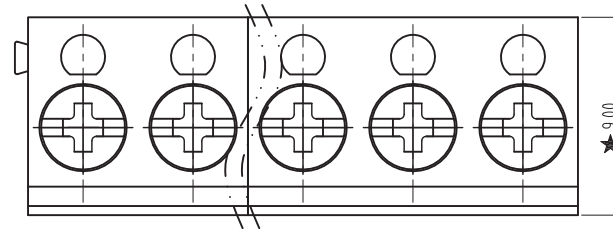

SECTION: A-A

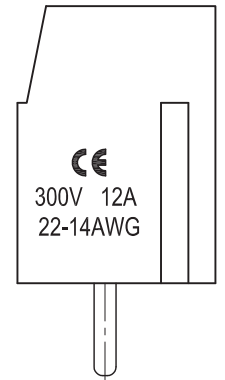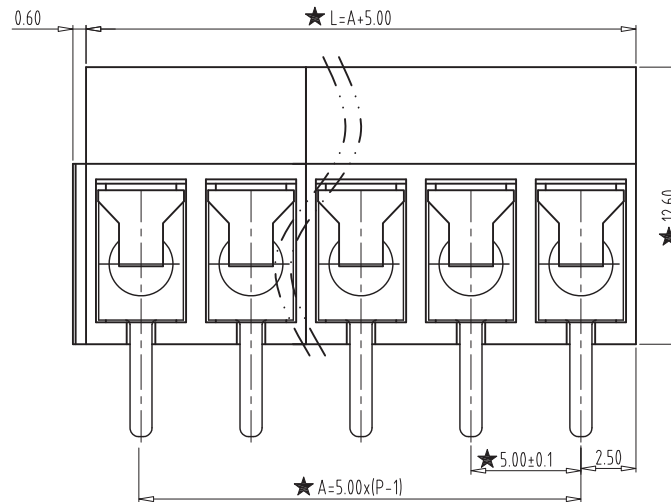

- NOTES:
1. Rating:300V 10A;
 2. Insulation Withstands Voltage: AC2000V/MIN
 3. Insulation Resistance:
500MΩ or more at DC500V
 4. Using Temperature Range: -40°C/+105°C
 5. Screw Torque Vlaue:0.5N.m
 6. Suitable Electric Wire: 14-22AWG
 - 7, "★" the important dimension.

A	Total Pitch Tolerances in mm								Nominal dimension range in mm										$\perp$		$\equiv$		$—$		$//$	
	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 0	over 10	all	over 0	over 100	over 150		
	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10	to 10	all	to 100	to 150	to 150		
	± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.55	± 0.70	± 0.75	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.2	0.3	0.5		
6									5									4								

			P	BRASS	Tin Plated
			P	Stainless Steel	
			P	SREEL	M3/Zn Plated
				PBT(V0)	02/03P
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	SK	DATE	14.05.27	UNITS	mm
CHK.		DATE		SCALE	3 : 1
APP.		DATE			
KEEN SIDE ELECTRONICS			NAME	KSE-300-5.0-XX	
			DWGNO.		