

Zener diode



Features

1. Small surface mounting type
2. High reliability

Applications

Voltage stabilization

Construction

Silicon epitaxial planar

Absolute Maximum Ratings

$T_j=25^\circ\text{C}$

Parameter	Test Conditions	Type	Symbol	Value	Unit
Power dissipation	R_{thJA} ? 300K/W		P_V	500	mW
Z-current			I_Z	P_V/V_Z	mA
Junction temperature			T_j	175	°C
Storage temperature range			T_{stg}	-65~+175	°C

Maximum Thermal Resistance

$T_j=25^\circ\text{C}$

Parameter	Test Conditions	Symbol	Value	Unit
Junction ambient	on PC board 50mm× 50mm× 1.6mm	R_{thJA}	500	K/W

Electrical Characteristics

$T_j=25^\circ\text{C}$

Parameter	Test Conditions	Type	Symbol	Min	Typ	Max	Unit
Forward voltage	$I_F=200\text{mA}$		V_F			1.5	V

LL55C Series

Type	V_{Znom}	I_{ZT}	for V_{ZT} and	I_{iT}	r_{ZIK} at I_{ZK}	I_R and I_K at V_R	TK_{VZ}
LL55C.	V	mA	$V^{1)}$	0	0	μA ? $A^{2)}$	%/K
2V4	2.4	5	2.28~2.56	<85	<600	1	-0.09~-0.06
2V7	2.7	5	2.5~2.9	<85	<600	1	-0.09~-0.06
3V0	3.0	5	2.8~3.2	<90	<600	1	-0.08~-0.05
3V3	3.3	5	3.1~3.5	<90	<600	1	-0.08~-0.05
3V6	3.6	5	3.4~3.8	<90	<600	1	-0.08~-0.05
3V9	3.9	5	3.7~4.1	<90	<600	1	-0.08~-0.05
4V3	4.3	5	4.0~4.6	<90	<600	1	-0.06~-0.03
4V7	4.7	5	4.4~5.0	<80	<600	1	-0.05~+0.02
5V1	5.1	5	4.8~5.4	<60	<550	1	-0.02~+0.02
5V6	5.6	5	5.2~6.0	<40	<450	1	-0.05~+0.05
6V2	6.2	5	5.8~6.6	<10	<200	1	0.03~0.06
6V8	6.8	5	6.4~7.2	<8	<150	1	0.03~0.07
7V5	7.5	5	7.0~7.9	<7	<50	1	0.03~0.07
8V2	8.2	5	7.7~8.7	<7	<50	1	0.03~0.08
9V1	9.1	5	8.5~9.6	<10	<50	1	0.03~0.09
10	10	5	9.4~10.6	<15	<70	1	0.03~0.1
11	11	5	10.4~11.6	<20	<70	1	0.03~0.11
12	12	5	11.4~12.7	<20	<90	1	0.03~0.11
13	13	5	12.4~14.1	<26	<110	1	0.03~0.11
15	15	5	13.8~15.6	<30	<110	1	0.03~0.11
16	16	5	15.3~17.1	<40	<170	1	0.03~0.11
18	18	5	16.8~19.1	<50	<170	1	0.03~0.11
20	20	5	18.8~21.2	<55	<220	1	0.03~0.11
22	22	5	20.8~23.3	<55	<220	1	0.04~0.12
24	24	5	22.8~25.6	<80	<220	1	0.04~0.12
27	27	5	25.1~28.9	<80	<220	1	0.04~0.12
30	30	5	28~32	<80	<220	1	0.04~0.12
33	33	5	31~35	<80	<220	1	0.04~0.12
36	36	5	34~38	<80	<220	1	0.04~0.12
39	39	2.5	37~41	<90	<500	0.5	0.04~0.12
43	43	2.5	40~46	<90	<600	0.5	0.04~0.12
47	47	2.5	44~50	<110	<700	0.5	0.04~0.12
51	51	2.5	48~54	<125	<700	0.5	0.04~0.12
56	56	2.5	52~60	<135	<1000	0.5	0.04~0.12
62	62	2.5	58~66	<150	<1000	0.5	0.04~0.12
68	68	2.5	64~72	<200	<1000	0.5	0.04~0.12
75	75	2.5	70~79	<250	<1500	0.5	0.04~0.12

¹⁾ Tighter tolerances available request:

LL55A... $\pm 1\%$ of V_{Znom}

LL55B... $\pm 2\%$ of V_{Znom}

LL55F... $\pm 3\%$ of V_{Znom}

²⁾ at $T_j=150^\circ$

Characteristics ($T_j=25^\circ\text{C}$ unless otherwise specified)

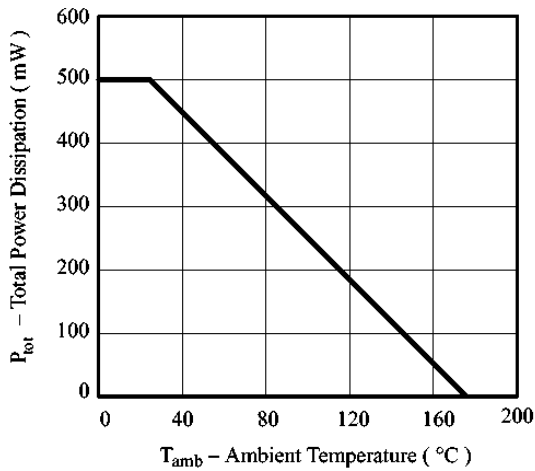


Figure 1. Total Power Dissipation vs. Ambient Temperature

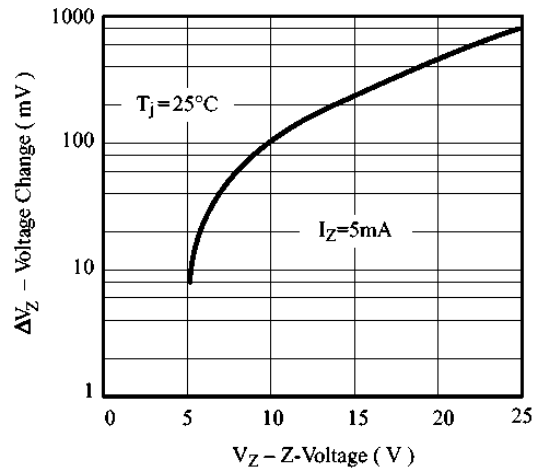


Figure 2. Typical Change of Working Voltage under Operating Conditions at $T_{\text{amb}}=25^\circ\text{C}$

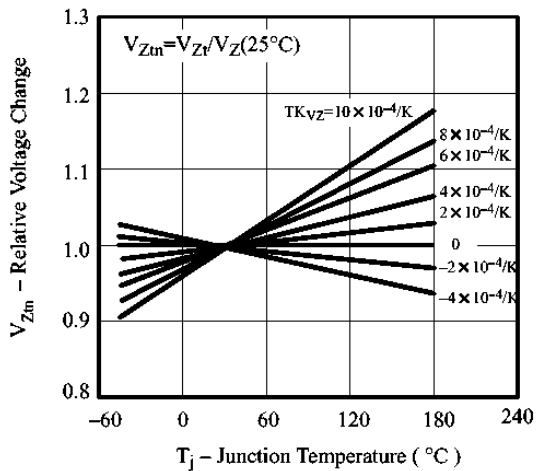


Figure 3. Typical Change of Working Voltage vs. Junction Temperature

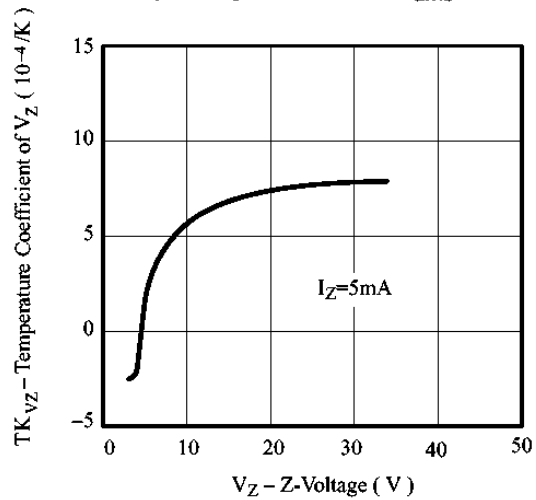


Figure 4. Temperature Coefficient of V_Z vs. Z-Voltage

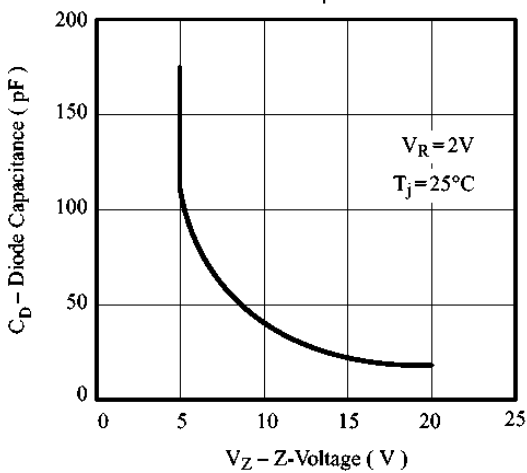


Figure 5. Diode Capacitance vs. Z-Voltage

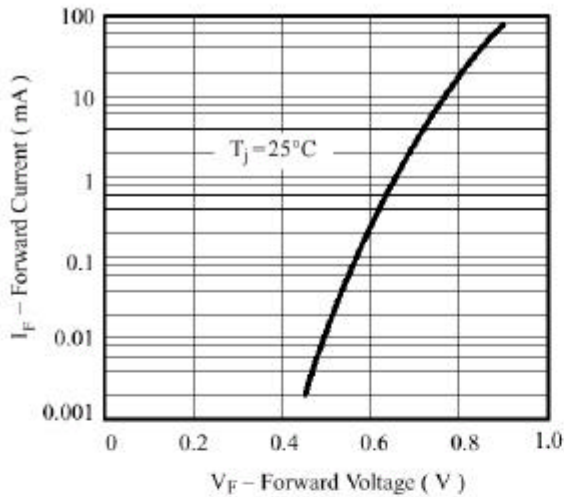


Figure 6. Forward Current vs. Forward Voltage

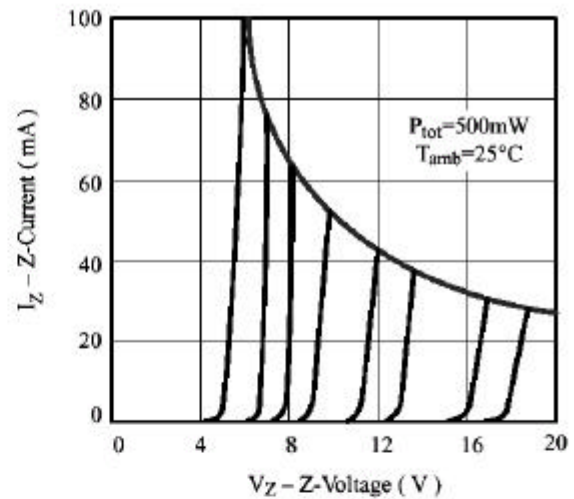


Figure 7. Z-Current vs. Z-Voltage

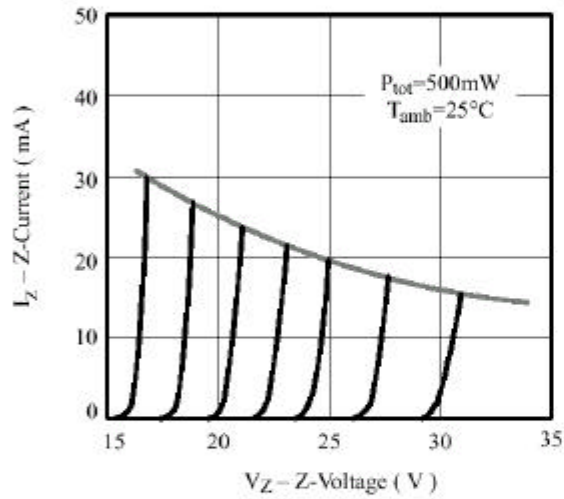


Figure 8. Z-Current vs. Z-Voltage

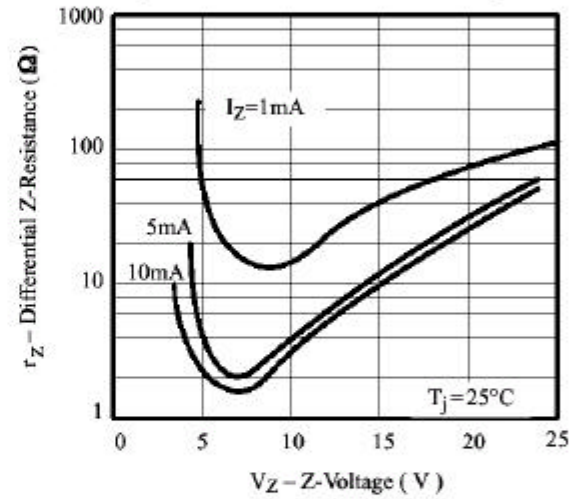


Figure 9. Differential Z-Resistance vs. Z-Voltage


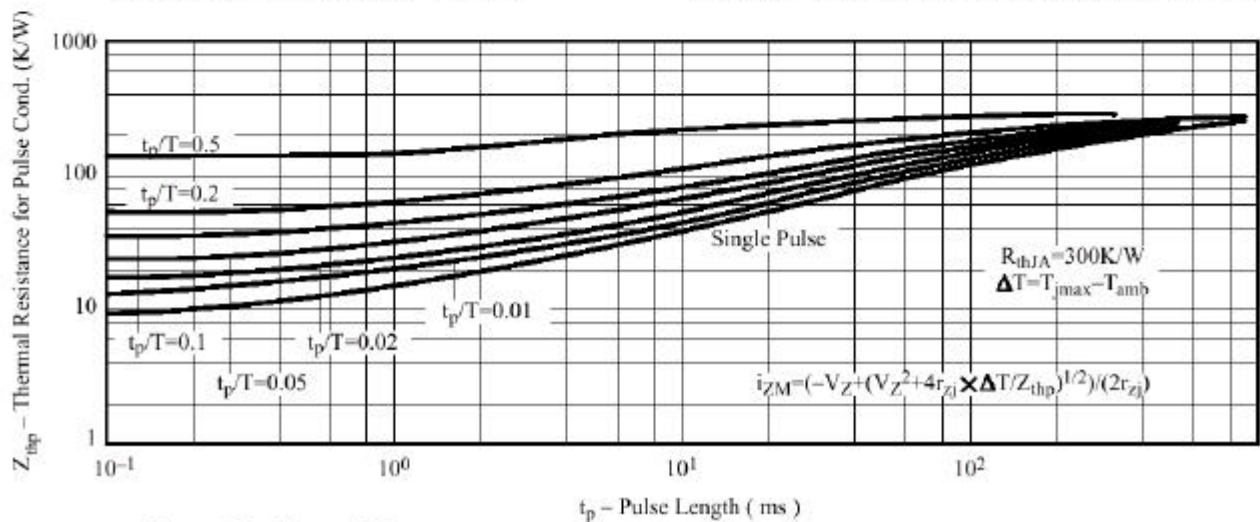


Figure 10. Thermal Response

Dimensions in mm

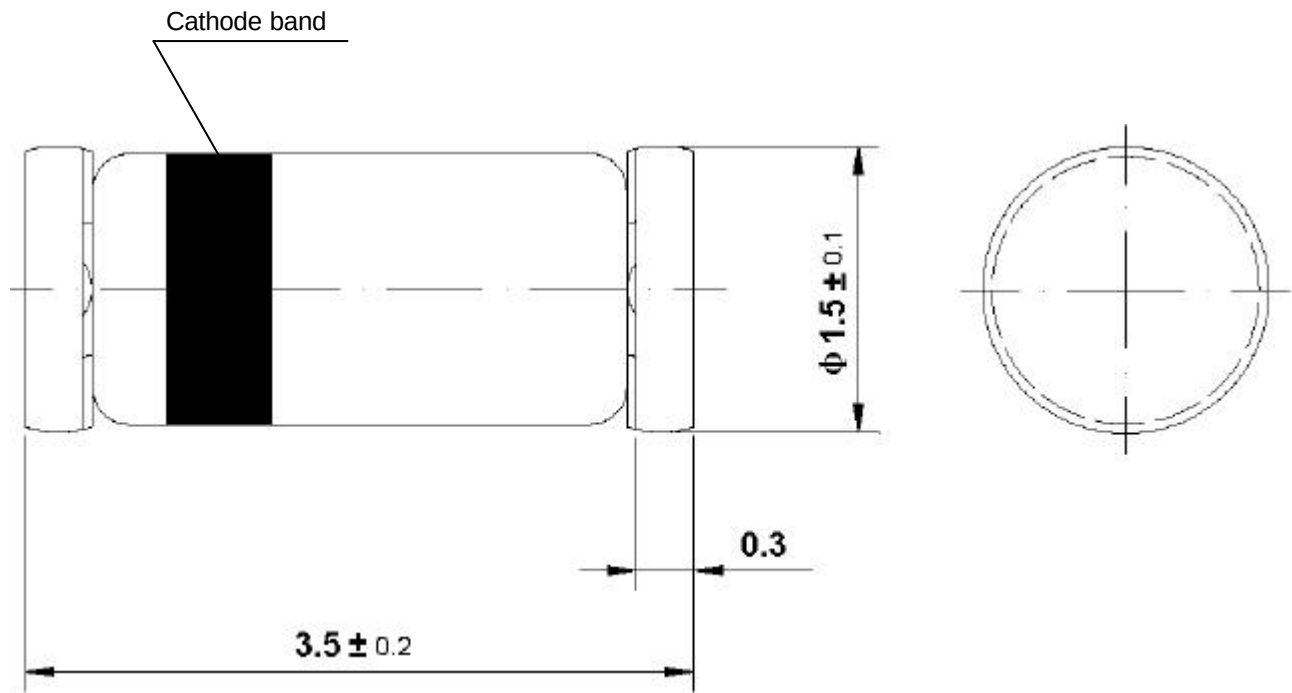

Glass Case
Mini Melf / SOD 80
JEDEC DO 213 AA