




EMBEDDED RF
MODULES FOR OEMS



XBEE® 802.15.4 RF MODULES

Low-cost, easy-to-deploy modules provide critical end-point connectivity to devices and sensors

XBee 802.15.4 RF modules provide OEMs with a common footprint shared by multiple platforms, including multipoint and ZigBee/Mesh topologies, and both 2.4 GHz and 900 MHz solutions. OEMs deploying the XBee can substitute one XBee for another, depending upon dynamic application needs, with minimal development, reduced risk and shorter time-to-market.

XBee 802.15.4 RF modules are ideal for applications requiring low latency and predictable communication timing. Providing quick, robust communication in point-to-point, peer-to-peer, and multipoint/star configurations, XBee 802.15.4 products

enable robust end-point connectivity with ease. Whether deployed as a pure cable replacement for simple serial communication, or as part of a more complex hub-and-spoke network of sensors, XBee 802.15.4 RF modules maximize performance and ease of development.

XBee 802.15.4 modules seamlessly interface with compatible gateways, device adapters and range extenders, providing developers with true beyond-the-horizon connectivity.


BENEFITS

- Point-to-multipoint network topology
- 2.4 GHz for worldwide deployment
- 900 MHz for long-range deployment
- Fully interoperable with other other Digi networking products, including gateways, device adapters and range extenders
- Common XBee footprint for a variety of RF modules
- Low-power sleep modes
- Multiple antenna options
- Industrial temperature rating (-40° C to 85° C)

RELATED PRODUCTS



APPLICATION EXAMPLE

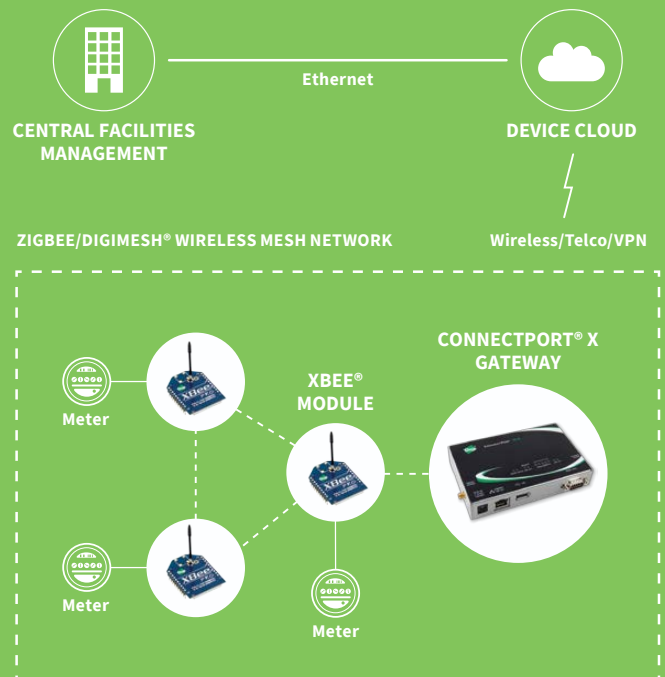

SPECIFICATIONS

XBee® 802.15.4

XBee-PRO® 802.15.4

PERFORMANCE

RF DATA RATE	250 kbps	250 kbps
INDOR/URBAN RANGE	100 ft (30 m)	300 ft (100 m)
OUTDOOR/RF LINE-OF-SIGHT RANGE	300 ft (100 m)	1 mi (1.6 km)
TRANSMIT POWER	1 mW (+0 dBm)	60 mW (+18 dBm)*
RECEIVER SENSITIVITY (1% PER)	-92 dBm	-100 dBm

FEATURES

SERIAL DATA INTERFACE	3.3V CMOS UART
CONFIGURATION METHOD	API or AT Commands, local or over-the-air
FREQUENCY BAND	2.4 GHz
INTERFERENCE IMMUNITY	DSSS (Direct Sequence Spread Spectrum)
SERIAL DATA RATE	1200 bps - 250 kbps
ADC INPUTS	(6) 10-bit ADC inputs
DIGITAL I/O	8
ANTENNA OPTIONS	Chip, Wire Whip, U.FL, & RPSMA

NETWORKING & SECURITY

ENCRYPTION	128-bit AES
RELIABLE PACKET DELIVERY	Retries/Acknowledgments
IDS AND CHANNELS	PAN ID, 64-bit IEEE MAC, 16 Channels


POWER REQUIREMENTS

SUPPLY VOLTAGE	2.8 - 3.4VDC	2.8 - 3.4VDC
TRANSMIT CURRENT	45 mA @ 3.3VDC	215 mA @ 3.3VDC
RECEIVE CURRENT	50 mA @ 3.3VDC	55 mA @ 3.3VDC
POWER-DOWN CURRENT	<10 uA @ 25° C	


REGULATORY APPROVALS

FCC (USA)	OUR-XBEE	OUR-XBEEPRO
IC (CANADA)	4214A-XBEE	4214A-XBEEPRO
ETSI (EUROPE)	Yes	Yes - Max TX 10 mW
C-TICK AUSTRALIA	Yes	
TELEC (JAPAN)	Yes	

802.15.4 - Star




(Side Views)

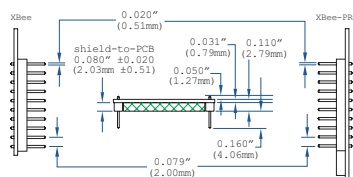

(Top View)

(Top View)

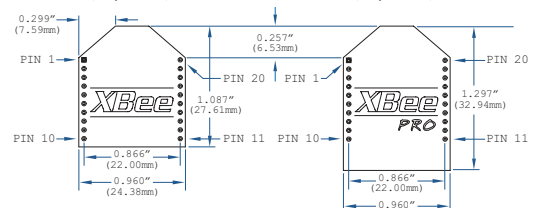

PART NUMBERS	DESCRIPTION
XKB2-AT-WWC	Wireless Connectivity Kit w/ XBee 802.15.4
XKB2-AT-WWG	XBee / Arduino Compatible Coding Platform
XB24-AWI-001	XBee 802.15.4 low-power module w/ wire antenna
XB24-API-001	XBee 802.15.4 low-power module w/ PCB antenna
XB24-AUI-001	XBee 802.15.4 low-power module w/ U.fl connector
XB24-ASI-001	XBee 802.15.4 low-power module w/ RPSMA connector
XBP24-AWI-001	XBee-PRO 802.15.4 extended-range module w/ wire antenna
XBP24-AWI-001J	XBee-PRO 802.15.4 extended-range module w/ wire antenna (International)
XBP24-AUI-001	XBee-PRO 802.15.4 extended-range module w/ U.fl connector
XBP24-AUI-001J	XBee-PRO 802.15.4 extended-range module w/ U.fl connector (International)
XBP24-ASI-001	XBee-PRO 802.15.4 extended-range module w/ RPSMA connector
XBP24-ASI-001J	XBee-PRO 802.15.4 extended-range module w/ RPSMA connector (International)
XBP24-API-001	XBee-PRO 802.15.4 extended-range module w/ PCB antenna
XBP24-API-001J	XBee-PRO 802.15.4 extended-range module w/ PCB antenna (International)

FOR MORE INFORMATION
PLEASE VISIT WWW.DIGI.COM

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2015 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91001412
C1/915

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL FRANCE
+33-1-55-61-98-98 / www.digi.fr

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Digi International:

[XBP24-PKC-001-UA](#) [XBP24-BSIT-004](#) [XBP24-BWIT-004](#) [XBP24-BUIT-004](#) [XBP24-BSIT-004J](#) [XB24-DKS-INT](#)
[XB24-PDK-INT](#) [XBP24-DKS-INT](#) [XB24-BUIT-004](#) [XBP24-Z7SIT-004](#) [XBP24-Z7WIT-004](#) [XB24-Z7UIT-004](#) [XB24-](#)
[Z7SIT-004](#) [XBP24-Z7UIT-004](#) [XB24-Z7WIT-004](#) [XBP09-DPSIT-156](#) [XBP09-DMSIT-156](#) [XBP09-DPUIT-156](#) [XBP24-](#)
[DMWIT-250J](#) [XBP09-DMUIT-156](#) [XBP24-DMUIT-250J](#) [XBP24-DMSIT-250J](#) [XBP09-DMWIT-156](#) [XB24-DKS](#) [XB24-](#)
[PDK](#) [XBP24-DKS](#) [XBP24-AUI-001](#) [XBP9B-DMWT-002](#) [XBP24BSEWIT-001](#)